


The Chimney Heat Potential to be Converted into Electrical Energy with Thermoelectric Generator: Dimensionless Analysis

By Irwin Bizzy



The Chimney Heat Potential to be Converted into Electrical Energy with Thermoelectric Generator: Dimensionless Analysis

Irwin Bizzy^{1,*}, Agung Mataram¹, Hari Firmansyah¹, Muhammad Zahir¹, Fadhil Fuad Rachman²

¹ ¹⁴ Department Mechanical Engineering, Faculty of Engineering, Universitas Sriwijaya, Indralaya, Ogan Ilir 30662, Sumatera Selatan, Indonesia

² ¹³ Department of Industry Engineering, Faculty of Engineering, Universitas Muhammadiyah Palembang, 13 Ulu Palembang 30263, Sumatera Selatan, Indonesia

ARTICLE INFO

ABSTRACT

Article history:

Received 22 November 2022

Received in revised form 15 March 2023

Accepted 26 March 2023

Available online 16 April 2023

Keywords:

Chimney; dimensional analysis; Thermoelectric Generator; Heat Recovery Steam Generator

¹ The gas-steam power plant combines a gas power plant and a steam power plant, where Heat Recovery Steam Generator (HRSG) is a unit for generating steam. The waste heat from this system is channelled to the chimney with a Thermoelectric Generator (TEG) module to generate electrical energy. TEG uses the waste heat from the thermal conduction process from the chimney wall, where the height, diameter, and velocity variables are considered for analysis. To optimize this analysis, we used dimensional analysis to get a laboratory-scale system, and the method used the matrix dimensionless of the balance energy equation. As a result of the investigation, the calculation of chimney heat potential is obtained; the condition temperature will increase when velocity increases and the value of diameter and height decrease, then there is have an error about 14% from laboratory-scale design of chimney.

1. Introduction

There is an energy crisis in several countries, it will seriously impact daily life and economic activity. Therefore, many countries are changing their energy policies in a way that does not depend on fossil energy sources and starting to utilize the available renewable energy such as bioenergy, wind energy, solar energy, and others [1-4]. Indonesia has much renewable energy sources (RES), where PV energy is more potential as an electrical power source, and the residual energy is mostly neglected [5].

Residual energy utilization is a solution to increase the efficiency of the energy source, and a Gas-Steam Power Plant (GSPP) produces hot steam that produces waste thermal energy from the chimney wall of the HRSG (Heat Recovery Steam Generator). Thermoelectric Generator (TEG) module is a proper solution to overcome the residual heat of the HRSG process on the chimney's wall, and this heat can be converted into electricity.

* Corresponding author.

E-mail address: irwin@unsri.ac.id

<https://doi.org/10.37934/arfmts.105.1.122130>

Other researchers applied TEG to the waste heat dissipation, presenting 60-65% wasted in automotive engines [6]. TEG is mounted on exhaust surfaces and the results show an increase in thermal efficiency but non-uniform temperature across the TEG module, which affects the performance of the TEG module [7]. The same research has been carried out by researchers regarding the applications of this TEG module by utilizing the waste heat from the engine block [8]. Almost all TEG research is applied to the small components to facilitate the installation process, collect data on power output or efficiency, and determine cooling methods [9-11]. An unknown scaling method in heat exchanger chimney studies by utilizing waste heat using TEG modules was carried out [12,13].

Incorrect scaling will affect the actual experiment size results, there are some researchers have used modeling and numerical study using the Pi-Buckingham theorem for scaling, such as modeling the heat load for an air-conditioned room, or investigation the effect of surface roughness on wet steam flow [14,15]. This study is a preliminary research of waste heat utilization on the HRSG chimney wall, which focus on the mathematical modelling of laboratory-scale with dimensionless analysis using Pi-Buckingham theorem to determine the heat output, efficiency and cooling methods on TEG installation.

2. Method and Dimensional Analysis

The research method is descriptive analysis, starting with a survey of the field on the industrial power plant GSPP, then continuing for analyzing dimensions with laboratory-scale test equipment. Buckingham's pi theory is the basis of dimensional analysis, the dimensions are expressed in these dimensions. The basic dimension is length (L), and the area is symbolized as (L²). The second basic dimension is time as (T), and the magnitude of speed is symbolized by (LT⁻¹). The third basic dimension of mass is (M), the density is symbolized by (ML⁻³), mass flow is symbolized by (MT⁻¹), and temperature is (θ) [16,17].

According to the system schematic shown in Figure 1, we assume the dimensionless analysis used the energy balance equation, as shown in Eq. (1) below.

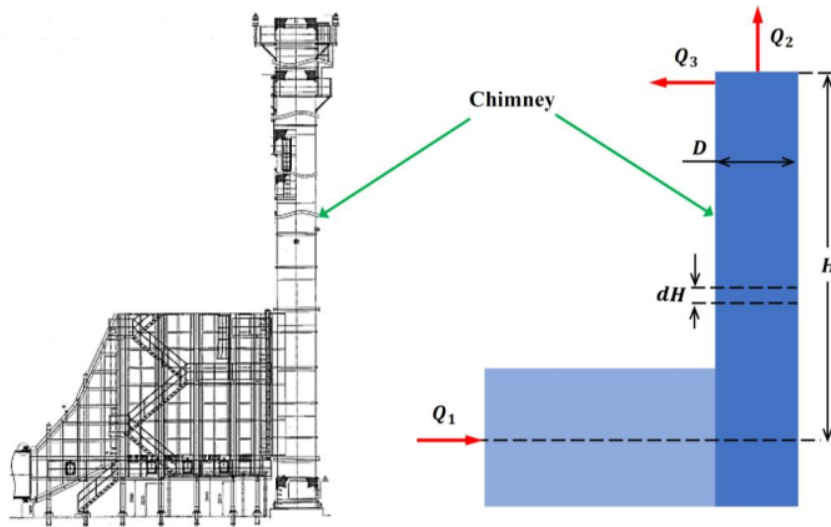


Fig. 1. Dimensionless analysis schematic of the steam chimney

$$Q_1 = Q_2 + Q_3 \tag{1}$$

The value Q_1 is the input heat that enters the plant chimney from the residual heat source of the HRSG. The value Q_2 is the heat out of the chimney and Q_3 the residual heat in the wall. H is denoted as the height of the chimney and D is the diameter of the chimney [18,19].

$$Q_1 = \dot{m}_2 \cdot c_p \cdot T_{out} - k \cdot A \cdot \frac{\Delta T}{\Delta x} \quad (2)$$

$$Q_1 = \dot{m}_2 \cdot c_p \cdot T_{out} - k \cdot (\pi DH) \cdot \frac{(T_s - T_a)}{\Delta x} \quad (3)$$

where T_s is the wall temperature of the system, T_a is the ambient temperature, and T_{out} is the outside temperature of the system.

$$T_s = T_{out} \quad (4)$$

We assumed the value of T_s is equal to $T_s = T_{out}$, where the value of the $dH = H$ at the chimney's peak.

$$Q_1 = Q_2 - k \cdot (\pi DH) \cdot \frac{(\Delta T)}{\Delta x} \quad (5)$$

The list variables of the dimensionless equation

$$Q_1, Q_2, k, D, H, \Delta T, \Delta x \quad (6)$$

where

$$Q_1 = \dot{m}_1 \cdot c_p \cdot T_{in} \quad (7)$$

$$Q_2 = \dot{m}_2 \cdot c_p \cdot T_{out} \quad (8)$$

$$\Delta T = T_s - T_{out} \quad (9)$$

k is the thermal conductivity, the temperature difference ΔT , and Δ the chimney's thickness. After all list variables are determined in Eq. (6), then continue to define the dimensional matrix as shown in Table 1.

Table 1
 Dimensional matrix

Dimensional	Q_1	Q_2	k	D	H	ΔT	Δx
M	1	1	1	0	0	0	0
L	2	2	1	1	1	0	1
T	-3	-3	-3	0	0	0	0
θ	0	0	-1	0	0	1	0

Then the formation of matrix two non-dimensional groups on Eq. (10) to (13).

$$\begin{bmatrix} 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ 2 & 2 & 1 & 1 & 1 & 0 & 1 \\ -3 & -3 & -3 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} a & h \\ b & i \\ c & j \\ d & k \\ e & l \\ f & m \\ g & n \end{bmatrix} = [0] \quad (10)$$

For calculation π_1

$$\pi_1 = \frac{b}{a} = \frac{Q_2}{Q_1} \quad (11)$$

According to the balance energy equation $Q_1 > Q_2$

$$0 < \frac{Q_2}{Q_1} < 1 \quad (12)$$

For calculation π_2

$$\pi_2 = \frac{j \cdot k \cdot l \cdot m}{i \cdot n} = \frac{kDH}{Q_2} \cdot \frac{\Delta T}{\Delta x} \quad (13)$$

Based on the field survey, the chimney height is 40 m, the chimney diameter is 2.6 m, the chimney exit temperature is 118 °C, the thermal conductivity is 46 W/m.K and the hot air mass flow rate is 83.2 kg/s.

As shown in Figure 2(a), the laboratory scale dimension of HRSG with diameter 4 inches, $a = 201.4$ mm, and $b = 40$ mm, then the value of H is from the dimensionless calculation. The experiment setup is depicted in Figure 2(b), the HRSG chimney used a black iron pipe with thermal conductivity from 26-37.5 W/m.K, where the TEG is attached to the outer wall, then a blower to produce inlet velocity and a heater to produce inlet temperature. More details on the experimental parameter setup values are given in Table 2 below.

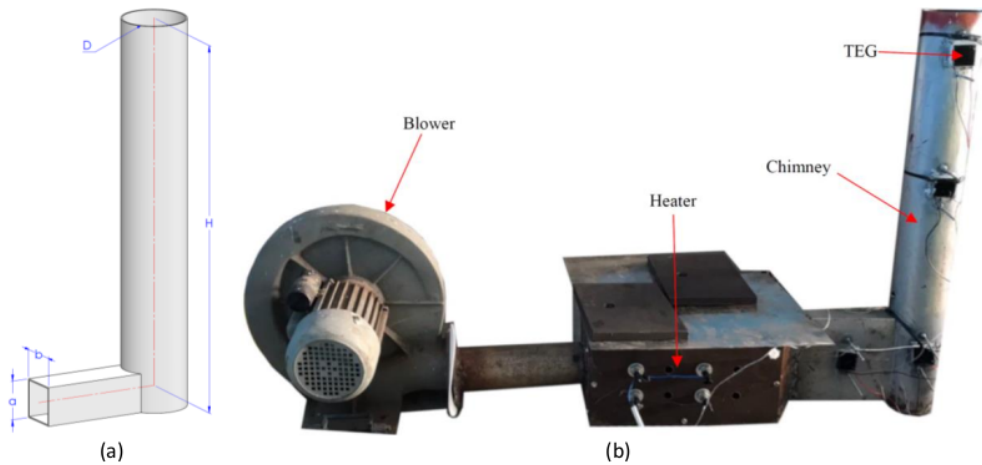


Fig. 2. Laboratory scale of HRSG chimney (a) Dimension parameters (b) Experimental setup

Table 2

Comparison of the actual size HRSG chimney and laboratory scale size

Parameters	Actual size	Laboratory scale size
Height (m)	36.05	0.765
Diameter (m)	26	0.1143
Thickness (m)	0.05	0.002
Inlet area (m ²)	23.750	0.008
Outlet area (m ²)	2.042	0.090
Thermal Conductivity (W/m.K)	46	31.7
Inlet velocity (m/s)	2.86	1.2
Inlet temperature (°C)	300	100
Outlet temperature (°C)	118	-
Ambient temperature (°C)	27	-

In Table 2, the value of the outlet and ambient temperature will be obtained in the experimental result and will be compared with the actual size in the dimensionless calculation result.

3. Results

The result of the dimensionless energy balance calculation on the chimney shows a trend between π_1 and π_2 , where the value π_2 will increase while the value π_1 decreases, as shown in Figure 3. The value π_1 is set from 0.1-1 because it Q_2 will not be greater than Q_1 . The value Q_2 will decrease while through the chimney's wall as thermal conduction.


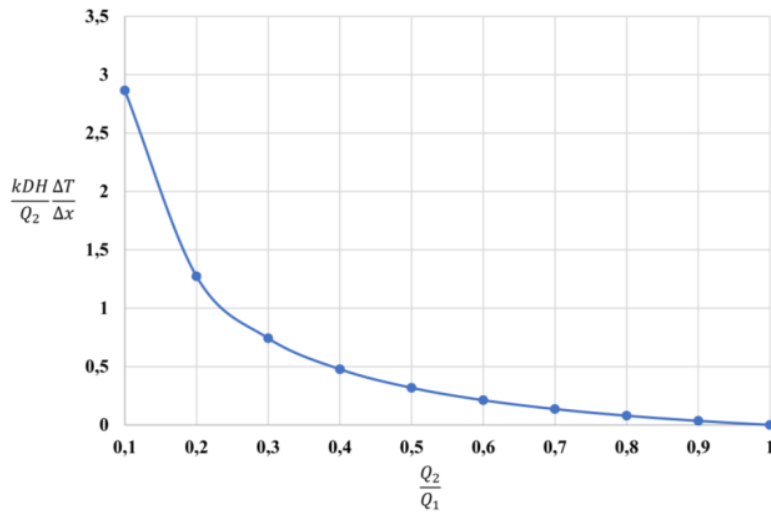



Fig. 3. Two non-dimensional groups π_1 and π_2 for the energy balance of the steam chimney

The value of π_1 has relation to the efficiency of output temperature, wall temperature and TEG power output, when π_1 increases will make the efficiency high and vice versa. Furthermore, for the calculation result of the output temperature is obtained from ΔT in π_2 , where the T_{out} will be used in TEG as hot side and cold side from T_a with assisted by aluminum fins.

Figure 4 to Figure 6 shows the relation between π_1 and T_{out} , where temperature decreases when the π_1 increases, then the outlet temperature increases when the head of the chimney, outlet diameter, and inlet velocity decreases respectively. According to the experimental setup in Figure 2(b), the value of diameter is difficult to change because it has been determined from fabrication, but we can change the value of the chimney height (black iron pipe height) and inlet velocity from the blower.

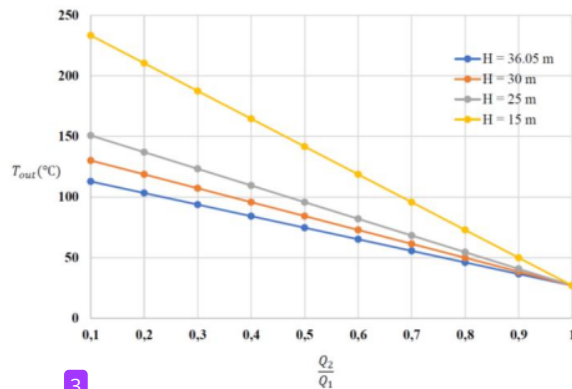

3 **Fig. 4.** Effect of height on the ratio π_1 and T_{out}

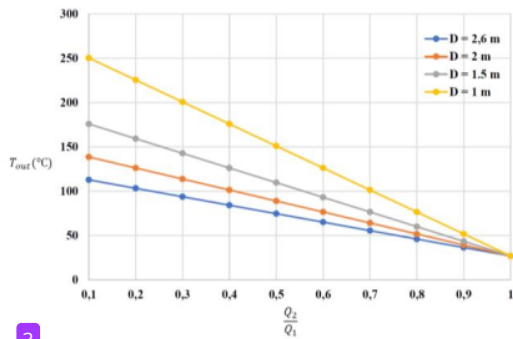

3
Fig. 5. Effect of diameter on the ratio π_1 and T_{out}

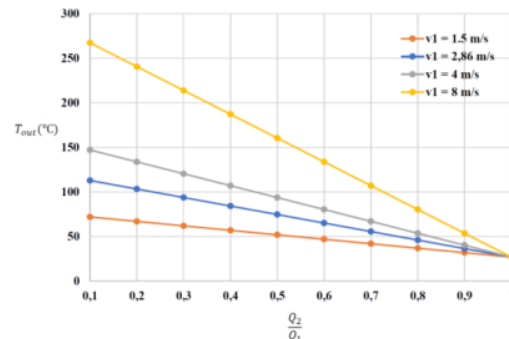


Fig. 6. Effect of velocity on the ratio π_1 and T_{out}

In Figure 7, the output temperature result of the experiment is obtained at 57°C and the ambient temperature is 31.6°C. The result π_1 of the laboratory-scale size is further from the actual size i.e., 0.53 and 0.39, and needs to recalculate the input velocity or height of the laboratory scale, but the output temperature of the laboratory scale is larger than the actual size.

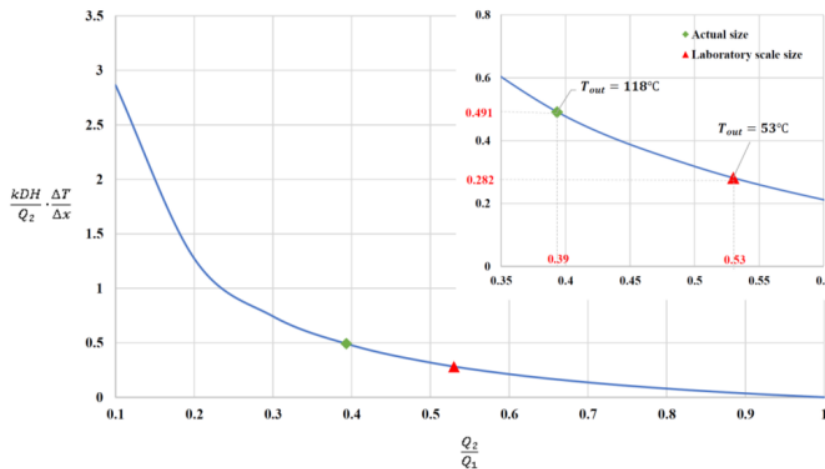


Fig. 7. The comparison results of the actual size HRSg chimney and laboratory scale size on dimensionless calculation

4. Conclusions

The calculation of chimney heat potential in HRSg using dimensionless analysis is obtained. The condition temperature will increase when velocity increases, and the value of diameter and height decrease—the π_1 is heat efficiency of the chimney (made in percentage). Then the π_2 can be considered as the ratio of Q_3 / Q_2 when added by π (phi) as thermal conduction. This dimensionless calculation of the laboratory has been close to the actual size prediction, but there is an error of about 14% from the laboratory-scale design of the chimney, and able to be continued in future studies.

Acknowledgement

Thanks to the Minister of Education, Culture, Research and Technology, and also to the Chancellor of Sriwijaya University based on research contract number 142/E5/PG.02.00.PT/2022.

References

- [1] Jee, Jap Haw, and Lian See Tan. "Investigation on the potential of bioethanol synthesis from honeydew melon rind." *Progress in Energy and Environment* 16 (2021): 45-58.
- [2] Mondal, Mithun, Djamal Hissein Didane, Alhadj Hisseine Issaka Ali, and Bukhari Manshoor. "Wind Energy Assessment as a Source of Power Generation in Bangladesh." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 26, no. 3 (2022): 16-22. <https://doi.org/10.37934/araset.26.3.1622>
- [3] Ismail, Ainaa Maya Munira, Zurriati Mohd Ali, Kamariah Md Isa, Mohammad Abdullah, and Fazila Mohd Zawawi. "Study On the Potentiality of Power Generation from Exhaust Air Energy Recovery Wind Turbine: A Review." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 87, no. 3 (2021): 148-171. <https://doi.org/10.37934/arfm.87.3.148171>
- [4] Ilham, Zul, Nur Aida Izzaty Saad, Wan Abd Al Qadr Imad Wan, and Adi Ainurzaman Jamaludin. "Multi-criteria decision analysis for evaluation of potential renewable energy resources in Malaysia." *Progress in Energy and Environment* 21 (2022): 8-18. <https://doi.org/10.37934/progee.21.1.818>
- [5] Raharjo, Jangkung, Basuki Rahmat, and Jaspar Hasudungan. "Monitoring Indonesia's Energy Mix Achievement Using Simple Linear Regression." *International Journal of Energy Economics and Policy* 12, no. 2 (2022): 143-148. <https://doi.org/10.32479/ijee.12759>
- [6] Putra, Nandy, Raldi Artono Koestoer, M. Adhitya, Ardian Roekettino, and Bayu Trianto. "Potensi pembangkit daya termoelektrik untuk kendaraan hibrid." *Makara Journal of Technology* 13, no. 2 (2009): 149036. <https://doi.org/10.7454/mst.v13i2.466>
- [7] Meng, Jing-Hui, Xiao-Dong Wang, and Wei-Hsin Chen. "Performance investigation and design optimization of a thermoelectric generator applied in automobile exhaust waste heat recovery." *Energy Conversion and Management* 120 (2016): 71-80. <https://doi.org/10.1016/j.enconman.2016.04.080>
- [8] Wu, Zemei, Kamal H. Khayat, Caijun Shi, Bernardo F. Tutikian, and Qing Chen. "Mechanisms underlying the strength enhancement of UHPC modified with nano-SiO₂ and nano-CaCO₃." *Cement and Concrete Composites* 119 (2021): 103992. <https://doi.org/10.1016/j.cemconcomp.2021.103992>
- [9] Jouhara, Hussam, Alina Zabnińska-Góra, Navid Khordehgah, Qusay Doraghi, Lujean Ahmad, Les Norman, Brian Axcell, Luiz Wrobel, and Sheng Dai. "Thermoelectric generator (TEG) technologies and applications." *International Journal of Thermofluids* 9 (2021): 100063. <https://doi.org/10.1016/j.ijft.2021.100063>
- [10] Azad, Amirreza, Iman Fakhari, Pouria Ahmadi, and Nader Javani. "Analysis and optimization of a fuel cell integrated with series two-stage organic Rankine cycle with zeotropic mixtures." *International Journal of Hydrogen Energy* 47, no. 5 (2022): 3449-3472. <https://doi.org/10.1016/j.ijhydene.2021.02.061>
- [11] Miao, Zhuang, Xiangning Meng, and Lin Liu. "Analyzing and optimizing the power generation performance of thermoelectric generators based on an industrial environment." *Journal of Power Sources* 541 (2022): 231699. <https://doi.org/10.1016/j.jpowsour.2022.231699>
- [12] Schwurack, Roy, Johannes Bärschneider, Simon Unz, and Michael Beckmann. "Performance enhancement of a thermoelectric system with improved natural convection cooling by utilizing the chimney effect." *Energy Conversion and Management* 237 (2021): 114118. <https://doi.org/10.1016/j.enconman.2021.114118>
- [13] Khalil, Hesham, and Hamdy Hassan. "Enhancement thermoelectric generators output power from heat recovery of chimneys by using flaps." *Journal of Power Sources* 443 (2019): 227266. <https://doi.org/10.1016/j.jpowsour.2019.227266>
- [14] Chaichana, Chatchawan, and Surasit Thiangchanta. "The heat load modelling for an air-conditioned room using Buckingham-Pi theorem." *Energy Reports* 6 (2020): 656-661. <https://doi.org/10.1016/j.egy.2020.11.159>
- [15] Salmani, Fahime, Ehsan Amiri Rad, and Mohammad Reza Mahpeykar. "Investigation effects of roughness in wet steam flow with Buckingham Pi-theorem." *Journal of Thermal Analysis and Calorimetry* 147, no. 5 (2022): 3803-3814. <https://doi.org/10.1007/s10973-020-10526-z>
- [16] Hu, Bowen, Jianguo Wang, Zhanguo Ma, and Shuxun Sang. "Permeability and thermal conductivity models of shale matrix with a bundle of tortuous fractal tree-like branching micropore networks." *International Journal of Thermal Sciences* 164 (2021): 106876. <https://doi.org/10.1016/j.ijthermalsci.2021.106876>
- [17] Lee, Juhyeong, Scott M. Thompson, and Thomas E. Lacy Jr. "Thermal spreading analysis of a transversely isotropic heat spreader." *International Journal of Thermal Sciences* 118 (2017): 461-474. <https://doi.org/10.1016/j.ijthermalsci.2017.05.009>
- [18] Kawano, Koki, Shingo Motoki, Masaki Shimizu, and Genta Kawahara. "Ultimate heat transfer in 'wall-bounded'

- convective turbulence." *Journal of Fluid Mechanics* 914 (2021): A13. <https://doi.org/10.1017/jfm.2020.867>
- [19] Weng, Jingwen, Dongxu Ouyang, Xiaoqing Yang, Mingyi Chen, Guoqing Zhang, and Jian Wang. "Optimization of the internal fin in a phase-change-material module for battery thermal management." *Applied Thermal Engineering* 167 (2020): 114698. <https://doi.org/10.1016/j.applthermaleng.2019.114698>

The Chimney Heat Potential to be Converted into Electrical Energy with Thermoelectric Generator: Dimensionless Analysis

ORIGINALITY REPORT

7%

SIMILARITY INDEX

PRIMARY SOURCES

- 1 K. Sasompholsawat, R. Preece. "INVESTIGATING FREQUENCY SERVICES TO STABILISE LOW INERTIA POWER SYSTEMS", The 17th International Conference on AC and DC Power Transmission (ACDC 2021), 2021
21 words — 1%
Crossref
- 2 cmuir.cmu.ac.th
Internet
16 words — 1%
- 3 Jae Jun Yoo, Seung Phill Choi, Byung Woo Kim, Sang Jun Sim. "Optimal design of scalable photobioreactor for phototropic culturing of Haematococcus pluvialis", Bioprocess and Biosystems Engineering, 2011
13 words — 1%
Crossref
- 4 journal.uad.ac.id
Internet
13 words — 1%
- 5 Adi Bejo Suwardi, Syamsuardi Syamsuardi, Erizal Mukhtar, Nurainas Nurainas. "Diversity, distribution, and conservation status of wild edible fruit species in Sumatra, Indonesia: A case study in western and eastern Bukit Barisan Mountains", Research Square Platform LLC, 2023
10 words — < 1%
Crossref Posted Content

6 Morteza Motevalizadeh, Amin Rooberahan, Mohammad Sanaee Namaghi, Majid Mohammadi et al. "Cooling enhancement of portable computers processor by a heat pipe assisted with phase change materials", Journal of Energy Storage, 2022

10 words — < 1%

Crossref

7 coek.info

Internet

10 words — < 1%

8 ojs.fkip.ummetro.ac.id

Internet

10 words — < 1%

9 Advances in Formal Design Methods for CAD, 1996.

Crossref

9 words — < 1%

10 Farayi Musharavati. "Transient simulation of a solar-based hydrogen production plant with evacuated tube collector and ejector refrigeration system", International Journal of Hydrogen Energy, 2022

9 words — < 1%

Crossref

11 Mohammad Reza Aghdasi, Ali Reza Teymourtash, Esmail Lakzian. "Optimization of the pitch to chord ratio for a cascade turbine blade in wet steam flow", Applied Thermal Engineering, 2022

9 words — < 1%

Crossref

12 Zhe Wang, Yuemao Jiang, Fenghui Han, Shui Yu, Wenhua Li, Yulong Ji, Wenjian Cai. "A thermodynamic configuration method of combined supercritical CO2 power system for marine engine waste heat recovery based on recuperative effects", Applied Thermal Engineering, 2021

8 words — < 1%

Crossref

13 Wijaya Hadi Asmara, Sarno Sarno, Nengyanti Nengyanti. "Gender Based Waste Management Model in Sei Sembilang, Banyuasin Regency, South Sumatera Province", Jurnal Sylva Lestari, 2020 7 words — < 1%
Crossref

14 Muhammad Abu Bakar Sidik, H. Ahmad, Irshad Ullah, M. N. R. Baharom, H. M. Luqman, Zainab Zainal. "Small scale test model to study impulse flashover and attachment pattern of protected building structures", 2017 International Conference on Electrical Engineering and Computer Science (ICECOS), 2017 6 words — < 1%
Crossref

EXCLUDE QUOTES ON

EXCLUDE SOURCES OFF

EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES OFF