

NUMERICAL MODEL OF THERMAL DIFFUSIVITY FOR PEMPEK LENJER BOILING

by Gatot Priyanto

Submission date: 17-Jun-2023 11:43PM (UTC+0700)

Submission ID: 2117844179

File name: document_nt._J._Engg._Res._Sci._Tech._2015_RAILA-Gatot_2015.pdf (428.3K)

Word count: 4350

Character count: 22476

**International Journal of
Engineering Research and Science & Technology**



ISSN : 2319-5991
Vol. 4, No. 4
November 2015



www.ijerst.com

Email: editorijerst@gmail.com or editor@ijerst.com

Research Paper

NUMERICAL MODEL OF THERMAL DIFFUSIVITY FOR PEMPEK LENJER BOILING

Railia Karneta^{1*}, Amin Rejo², Gatot Priyanto² and Rindit Pambayun²*Corresponding Author: **Railia Karneta** ✉ railiakarneta@yahoo.com

Thermal diffusivity data during boiling process was used to determine specification of boiling condition, especially to determine the correct time and temperature of boiling process. Determination of thermal diffusivity coefficient (α) on material usually is conducted by means of analytical method and chemical composition, i.e., thermal diffusivity is the ratio of thermal conductivity to specific heat and specific density of material. Thermal diffusivity coefficient can also be determined by using numerical model based on temperature distribution during boiling process. The research objectives were to determine thermal diffusivity coefficient of pempek lenjer by using numerical model, to compare thermal diffusivity coefficients obtained from numerical model and the one based on chemical composition and analytical method as well as to determine the optimum time and temperature of pempek lenjer boiling for each formulation. Data analysis for thermal diffusivity was conducted by using computer software of Engineering Equation Solver (EES) Ver 8.914. The results showed that thermal diffusivity coefficient obtained by using numerical model was similar to the one based on chemical composition and analytical method. Therefore, numerical model can be used due to its capability to detect the changes of temperature and thermal diffusivity for each observation unit (minute) during boiling process. Thermal diffusivity coefficients based on numerical model, chemical composition and analytical method were in the range of 1.36×10^{-7} to $1.62 \times 10^{-7} \text{ m}^2/\text{s}$, 1.302×10^{-7} to $1.478 \cdot 10^{-7} \text{ m}^2/\text{s}$ and 1.313×10^{-7} to $1.483 \cdot 10^{-7} \text{ m}^2/\text{s}$, respectively. The required boiling times and center point temperatures for formula of fish dominant pempek lenjer and tapioca flour dominant pempek lenjer were 22 minutes and 87°C as well as 13 minutes and 80°C , respectively.

Keywords: numerical model, thermal diffusivity, boiling, pempek lenjer.

INTRODUCTION

Pempek lenjer (cylindrical form) is one of Indonesia traditional food made from milled fish

flesh, tapioca flour or sagu flour, water, salt and cooking ingredients as enhancing flavor. The pempek processing stages are fish flesh milling,

¹ Agricultural Higher School of Sriwigama, Jl Demang IV, Demang Lebar Daun Palembang, Indonesia 30137.

² Faculty of Agriculture, Sriwijaya University, Jl Raya Palembang-Prabumulih Km 32 Sumatera Selatan, Indonesia 30662.

materials mixing, pempek forming and boiling process (Karneta, 2010). The cooking stage (or boiling) is one of important stage because thermal and mass diffusivities was occurred in this stage as well physicochemical reaction such as protein denaturation and starch gelatinization. Thermal diffusivity is one of physical property related to heat transfer within material with dimension unit of m²/s or it can defined as rate of heat which is diffused to outside or inside the material and heat was naturally distributed into all of material parts (Fontana et al., 2001; Huang and Liu, 2009).

Thermal diffusivity is important to determine the rate of temperature change on material which in turn can be used to determine the energy requirement or optimum temperature in processing operation, especially for materials that are sensitive to heat (Singhal et al., 2008 ; Tastra et al., 2006; Suroso, 2006). High value of thermal diffusivity coefficient results in faster thermal diffusion within material (Jain and Pathare, 2007; Singhal et al., 2008) which produce shorter cooking time. Thermal diffusivity on pempek boiling is very important to determine the optimum time and temperature for pempek cooking. According to Olivera and Salvadori (2008), thermal diffusivity data during cooking process was used to determine specification of cooking condition, especially to determine proper time and temperature of cooking, to guarantee the safety in term of microbiology as well as to maintain food nutrition and food organoleptic characteristics.

Heat transfer occurs due to temperature gradient on materials in form of conduction, convection and radiation modes or combination of them. Heat transfer in solids is occurred in conduction mode, whereas heat transfer in liquids is occurred in convection mode. Heat transfer in solids is occurred due to movement of atoms at

high temperature in which those atoms capable to transfer heat (Huang and Liu, 2009). Conduction heat transfer in an object had produced the slowest point of heat receiver (cold point) which located in center of object (Jaczynski and Park, 2002; and Opaku et al., 2006). Heat transfer on cylindrical object is assumed only occurred in radial direction so that temperature distribution in a point will highly depend on environment temperature which is the closest to that point and can be determined by using numerical method (Crank,1998; Heldman and Lund, 2007).

The determination of thermal diffusivity coefficient (α) on materials usually is determined in indirect way i.e., thermal diffusivity coefficient is the ratio of thermal conductivity and specific heat and material density which can be presented as follows :

$$\alpha = \frac{k}{\rho C_p} \quad \dots(1)$$

According to Choi and Okos (1986) in Heldman and Lund (2007), determination of thermal diffusivity value obtained from ratio of material thermal conductivity (k) and specific heat (C_p) and material density (ρ) based on chemical composition of material was as follows :

$$k = k_m m_m + k_p m_p + k_f m_f + k_c m_c + k_a m_a \quad \dots(2)$$

$$C_p = C_{pm} m_m + C_{pp} m_p + C_{pf} m_f + C_{pc} m_c + C_{pa} m_a \quad \dots(3)$$

$$\frac{1}{\rho} = m_m \frac{1}{\rho m} + m_p \frac{1}{\rho p} + m_f \frac{1}{\rho f} + m_c \frac{1}{\rho c} + m_a \frac{1}{\rho a} \quad \dots(2)$$

Thermal diffusivity coefficient can also be determined by using numerical model based on temperature distribution during boiling process (Figure 2). The numerical model is assumed to be better because it is capable to detect the changes of temperature and thermal diffusivity at each observation unit during pempek's boiling process which can reduce the probability of material damage due to heat treatment. The direct determination of α value by using numerical model is conducted if data of temperature distribution (T) in relation to time (t) and distance from material's center point (r) had been determined. The measurement is conducted by using thermocouple for materials having sphere and cylindrical forms in one dimension.

RESEARCH OBJECTIVES

1. To determine the estimated thermal diffusivity coefficient of pempek lenjer by using numerical model and to compare it with thermal diffusivity coefficients based on chemical composition and analytical method.
2. To determine the optimum time and temperature of pempek lenjer boiling process for each formulation by using numerical model.


RESEARCH METHOD

This study was conducted at Agricultural Technology Laboratory, Faculty of Agriculture, Sriwijaya University from January to April 2015. Materials used in this study were tapioca flour, snakehead fish (*Ophicepallus striatus* Blkr), table salt and ice water. Formulation of fish and tapioca flour (F) in this study were as follows : $F_1 = 1 : 0.5$; $F_2 = 1 : 1.0$; $F_3 = 1 : 1.5$ and $F_4 = 1 : 2.0$, whereas temperature (T) treatments were $T_1 = 75^\circ\text{C}$; $T_2 = 80^\circ\text{C}$; $T_3 = 85^\circ\text{C}$; $T_4 = 90^\circ\text{C}$ and $T_5 = 95^\circ\text{C}$. Determination of thermal diffusivity coefficients

based on analytical method and chemical composition were used as control treatment.

RESEARCH PROCEDURE

- a. Production of pempek lenjer dough according to the formula with addition of water and 2.5% of table salt. The addition of water follows the equation below : $75\% \text{ dough weight} - (\text{water content of fish} \times \text{fish weight}) - (\text{water content of flour} \times \text{flour weight})$.
- b. Weighing of 350 g pempek dough followed by moulding it into cylindrical form (*lenjer*) and subsequently boiling it in waterbath at temperature of 100°C . Measurement of pempek's temperature was done by providing K-type thermocouple network (Figure 1) which was installed at three measurement points during the boiling process. This thermocouple was installed to guarantee the position of sample temperature measurements at center point (r_0) = 0 cm, middle point (r_1) = 1 cm and surface point (r_2) = 2 cm. Samples that had already achieved temperatures of 75°C , 80°C , 85°C , 90°C and 95°C on center point of pempek were uplift and air dried.

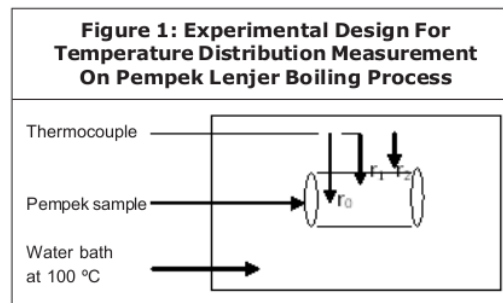

- c. Determination of thermal diffusivity coefficient based on chemical composition.

Pempek that had already well cooked based on center point temperature of pempek was

analyzed by using proximate analysis consisting of water content, protein content, lipid content, carbohydrate content, fiber content and ash content according to AOAC procedure.

Calculation of thermal diffusivity coefficient based on chemical composition of material was done by using the following equations :

$$k = k_m m_m + k_p m_p + k_f m_f + k_c m_c + k_a m_a$$

$$C_p = C_{pm} m_m + C_{pp} m_p + C_{pf} m_f + C_{pc} m_c + C_{pa} m_a$$

$$= m_m + m_p + m_f + m_c + m_a$$

d. Determination of thermal diffusivity coefficient using analytical method.

Thermal diffusivity coefficient using analytical method was determined by calculating the magnitudes of thermal conductivity coefficient k (W/m.°C), specific heat C_p (kJ/kg.°C) and density (kg/m³) using the following equation:

$$\alpha = \frac{k}{\rho C_p}$$

e. Data analysis of thermal diffusivity based on numerical model was done by using computer program software of *Engineering Equation Solver* (EES) Ver 8.914.


RESULTS AND DISCUSSION

Determination of Thermal Diffusivity Based on Numerical Model

Temperature distribution by using numerical method was determined from temperature distribution at a point which was close to that temperature such as shown in Figure 2.

Three dimension object such as a cube has sides length of $\Delta x \Delta y \Delta z$ (Gerald, 2005). If a material quantity can be represented by its concentration (C), then at a period of Δt the change

Figure 2: Temperature Distribution of Pempek Lenjer Using Numerical Method

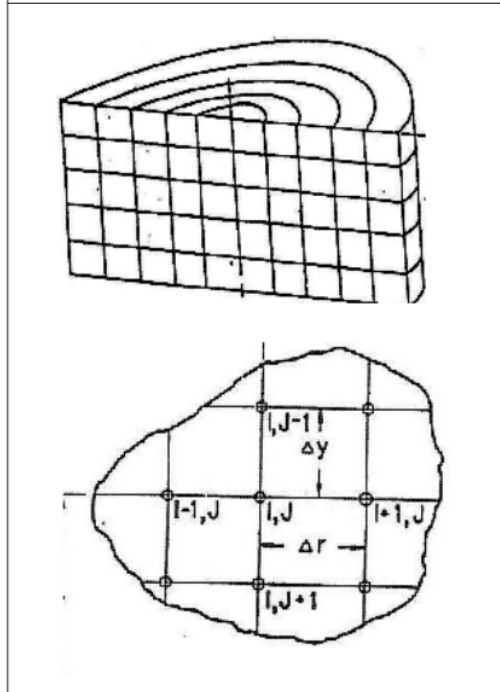

of material's concentration should be equal to net flux input of material during that time period (F). This expression mathematically can be presented as follows:

$$F_x(x) - F_x(x + \Delta x) \Delta y \Delta z +$$

$$(C^{i+\Delta r} - C^i) \Delta x y \Delta z = \Delta t F_y(y) - F_y(y + \Delta y) \Delta x \Delta z +$$

$$F_z(z) - F_z(z + \Delta z) \Delta x \Delta y$$

...(5)

where $F_x(x + \Delta x) = F_x(x) + . \Delta x$

Factor of $\Delta x \Delta y \Delta z$ can be omitted so that equation (5) has the following form:

$$\frac{\rho c}{\Delta t} + \frac{\partial F_x}{\partial x} + \frac{\partial F_y}{\partial y} + \frac{\partial F_z}{\partial z} = 0$$

...(6)

Based on Fick first law, diffusion flux is concentration gradient multiply by diffusion coefficient and can be presented by the following equation:

$$F_i = -D \frac{\partial c}{\partial x_i} \quad \dots(7)$$

Substitution of Equation (7) into Equation (6) yield:

$$\frac{\partial c}{\partial t} + \frac{\partial}{\partial x_i} \left\{ D \frac{\partial c}{\partial x_i} \right\} = 0 \quad \dots(8)$$

where i = 1, 2, 3 and D = diffusion coefficient. The Equation (8) above is known as governing equation for three dimensions diffusion process. If concentration C can be changed by T and Equation (8) is written in two dimensions, the following equation will be obtained:

$$\frac{\partial T}{\partial t} - D_x \frac{\partial^2 T}{\partial x^2} - D_y \frac{\partial^2 T}{\partial y^2} = 0 \quad \dots(9)$$

Equation (9) in one dimension will have the following form:

$$\frac{\partial T}{\partial t} - D \frac{\partial^2 T}{\partial x^2} \quad \dots(10)$$

Numerical scheme application from Equation (10) is as follows:

$$\frac{T_r^{n+1} - T_r^n}{\Delta t} = D \frac{T_r^{n-1} - 2T_r^n + T_{r+1}^n}{\Delta X^2} \quad \dots(11)$$

Application of thermal diffusivity by using numerical model for pempek lenjer boiling process is as follows:

$$D = \alpha = \frac{\Delta r^2}{\Delta t} = \left\{ \frac{r(T_r^n - T_r^{n-1})}{(\Delta r + r)T_{r+1}^{n-1} - (\Delta r + 2r)T_r^{n-1} + r(T_{r-1}^{n-1})} \right\} \quad \dots(12)$$

Estimation of temperature distribution at center part of pempek by using fundamental equation of conduction heat transfer (Holman, 1996) is as follows:

$$\frac{\partial^2 T}{\partial X^2} + \frac{\partial^2 T}{\partial Y^2} + \frac{\partial^2 T}{\partial Z^2} = \frac{\rho C_p}{k} \frac{\partial T}{\partial t} \quad \dots(13)$$

Equation (13) in cylindrical coordinate will have the following form:

$$\frac{1}{\alpha} \frac{\partial T}{\partial r} = \frac{\partial^2 T}{\partial r^2} + \frac{1}{r} \dots(14)$$

Heat transfer within cylinder is assumed only at radial direction of cylinder. Heat that exit and enter from axial direction can be neglected. Because temperature change at azimuth direction is too small, then Equation (14) will have the following form:

$$\frac{1}{\alpha} \frac{\partial T}{\partial r} = \frac{\partial^2 T}{\partial r^2} + \frac{1}{r} \quad \dots(15)$$

$\frac{\partial T}{\partial r}$ is the rate of temperature change within a material. If the rate of temperature change is constant, then value of can be expressed in form of a constant, e.g. A, so that Equation (15) will have the following form:

$$\frac{1}{\alpha} A = \frac{\partial^2 T}{\partial r^2} + \frac{\partial T}{\partial r^2} \quad \dots(16)$$

$\frac{\partial T}{\partial r}$ is temperature gradient related to timw within a material. If temperature gradient in material is at steady state, then its value is depend on time so that the following equation is obtained:

$$\frac{1}{\alpha} A = \frac{d^2 T}{dr^2} + \frac{1}{r} \frac{dT}{dr} \text{ atau } \frac{Ar}{\alpha} = r \frac{d^2 T}{dr^2} + \frac{dT}{dr} \quad \dots(17)$$

By taking:

$$r \frac{d^2T}{dr^2} + \frac{dT}{dr} = \frac{d}{dr} \left(r \frac{dT}{dr} \right)$$

integration of Equation (17) will yield the following equation:

$$\frac{Ar^2}{2\alpha} + C_1 = r \frac{dT}{dr} \text{ atau } \frac{dT}{dr} = \frac{Ar^2}{2\alpha} + \frac{C1}{r}$$

and reintegration will yield the following equation:

$$T = \frac{Ar^2}{4\alpha} + C_1 \ln r + C2 \quad \dots(18)$$

with the following boundary conditions :

1. Surface temperature (Ts) of material within cylinder (r = R) at time higher than zero (t > 0) is the rate of constant temperature change multiply by time. T = At = Ts at t ^ 0 , r = R
2. For cylinder axis (r = 0), derivative or temperature gradient = 0 and at time higher than zero = 0 at t > 0, r = 0. By inserting the second boundary condition, then value of C1= 0, whereas by inserting the first boundary condition into Equation (18), the value of C2 = Ts - which in turn yield the following equation:

$$T_s - T = \frac{A(R^2 - r^2)}{4\alpha} \quad \dots(19)$$

By taking r as the center axis, i.e. r = 0 and T is the center temperature of cylinder (Tc), then the above diffusivity equation according to Moura et al . (1998) become :

$$\alpha = \frac{AR^2}{4(T_s - T_c)} \quad \dots(20)$$


Application of numerical method to determine thermal diffusivity coefficient at center point of pempek lenjer was done by using the following model:

$$\alpha = \frac{\Delta r^2}{4\Delta t} \left\{ \frac{(T_r^{t+1} - T_r^t)}{(T_{r+1}^t - T_r^t)} \right\} \quad \dots(21)$$

APPLICATION OF THERMAL DIFFUSIVITY COEFFICIENT BY USING NUMERICAL MODEL VERSUS CHEMICAL COMPOSITION AND ANALYTICAL METHOD

Determination of thermal diffusivity coefficient for pempek lenjer with numerical model was done by using model 12 and model 21. After pempek lenjer boiling process, there was dimension increment especially on radial direction of pempek lenjer. Water absorption from initial process is relatively small so that increment assumption can be neglected. Distribution of thermal diffusivity coefficient during boiling process tends to increase at initial stage of process and subsequently is decrease at middle and up to final stages (Figure 3). Because tapioca flour is in form of starch granule, water during heating process will quickly penetrate into granules resulting in expansion. Thermal diffusivity coefficient in this stage was still high so that pempek lenjer capable to absorb heat quickly from water medium. Gelatinization and gel formation on the outer part of pempek lenjer result in decrease of its heat absorption capacity because when the starch granule is broken, its structure become tight resulting in low value of thermal diffusivity coefficient. This is in accord to study result from Fournier et al. (2001) which showed that there

Figure 3: Thermal diffusivity coefficient at center point and at any point

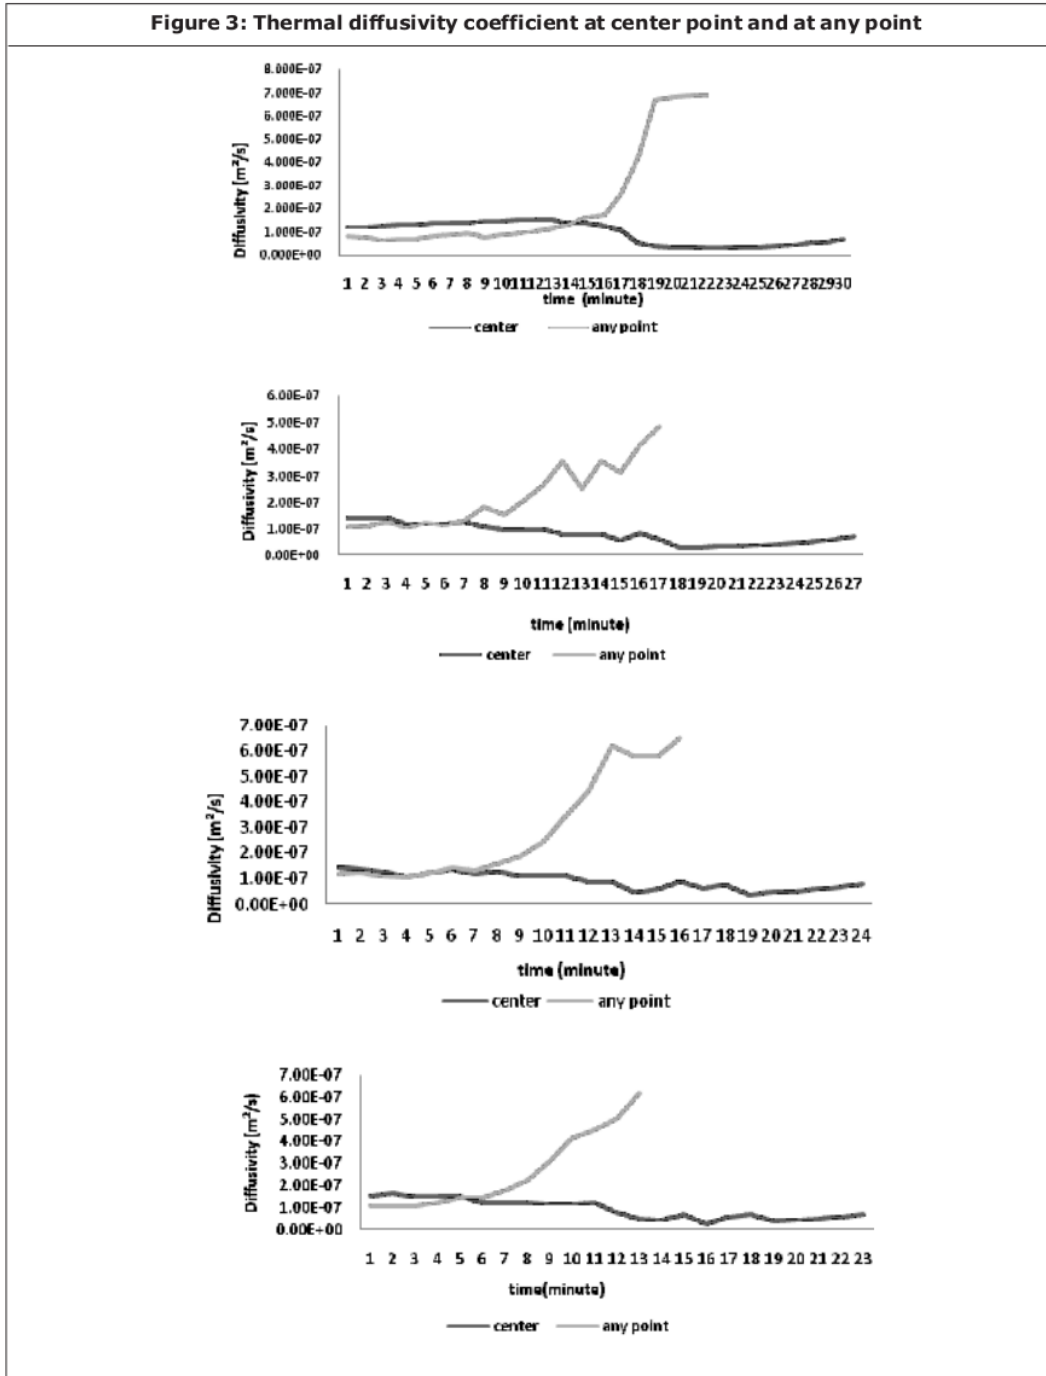

This article can be downloaded from <http://www.ijerst.com/currentissue.php>

was correlation between material hardness and thermal diffusivity coefficient. Thermal diffusivity rate on center point tend to be transiently slower (Ansari *et al.*, 2007; Singhal *et al.*, 2008) so that temperature on center point tend to be slower in approaching medium temperature compared to temperature near the material surface.

Linear equations for thermal diffusivity by using numerical model were as follows:

Formula 1 : $Y = 1.60E-07 - 4.30E-09 X$ ($r^2 = 0.725$)

Formula 2 : $Y = 1.36E-07 - 4.02E-09 X$ ($r^2 = 0.785$)

Formula 3 : $Y = 1.45E-07 - 4.13E-09 X$ ($r^2 = 0.743$)

Formula 4 : $Y = 1.62E-07 - 5.64E-09 X$ ($r^2 = 0.792$)

Remarks:

Y = thermal diffusivity (m²/s)

X = time (minutes) for X > 0

Constant condition is assumed to be achieved when the rate of temperature change °C/minute had relatively stable value for each time. Stable condition time is boiling optimum time because pempek lenjer had already in well cooked condition. Figure 3 showed that any points had achieved maximum value of thermal diffusivity coefficient. The fish dominant formula required longer cooking time because of low thermal diffusivity. This was due to the fact that fish flesh protein experience denaturation at temperature of >70°C (Suzuki, 1981), whereas tapioca flour experience gelatinization at temperature of 64.5°C (Haryadi, 1995). High quantity of fish flesh results in high lipid content and protein content which form complex structure with amylose that produce layer or sediment on surface. This in turn disturbed the amylose expulsion from granule

Table 1: Thermal Diffusivity Coefficients Based On Chemical Composition Of Pempek After Well Cooked

Formula	Diffusivity α ($10^{-7}m^2s^{-1}$) at well cooked temperatures				
	75 °C	80 °C	85 °C	90 °C	95 °C
F1	1,3023±0,010hE	1,3282±0,010gE	1,3484±0,036gD	1,3693±0,077fD	1,3712±0,040 eD
F2	1,3267±0,043hE	1,3476±0,060gD	1,3515±0,012fD	1,4115±0,026dC	1,4244±0,019cB
F3	1,3547±0,042fD	1,3894±0,034eC	1,4191±0,012dB	1,4251±0,022cB	1,4568±0,024bA
F4	1,3912±0,041eC	1,3872±0,045eC	1,4342±0,048cB	1,4403±0,022bcB	1,4784±0,010aA

Remarks : Numbers followed by the sama characters are not significantly different.

Table 2: Thermal diffusivity coefficients of pempek Lenjer Using Analytical Method After Well Cooked

Formula	Diffusivity α ($10^{-7}m^2s^{-1}$) at well cooked temperatures				
	75 °C	80 °C	85 °C	90 °C	95 °C
F1	1,3130	1,3280	1,3540	1,3683	1,3759
F2	1,3280	1,3488	1,3513	1,4270	1,4679
F3	1,3880	1,3919	1,4063	1,4263	1,4599
F4	1,3922	1,4014	1,4254	1,4300	1,48302

because of water absorption barrier so that higher energy is required to expel amylose from complex structure of protein and lipid (Richana and Titi, 2004).

The higher the thermal diffusivity coefficient, the faster was the heat energy that was diffused into material so that pempek lenjer was well cooked faster. The rate of heat transfer process from boiling water was affected by water diffusivity property within solid. Pempek surface in direct contact with boiling water had higher water quantity than water quantity within material so that water diffusion process is proceed from surface into material. Water that enters into material will occupy pores and water diffusion process will continue until the end of boiling. Thermal diffusivity coefficient of pempek lenjer by using numerical model was in the range of 1.36 to $1.62 \times 10^{-7} \text{ m}^2/\text{s}$. Thermal diffusivity coefficient of tapioca flour was $1.346 \times 10^{-7} \text{ m}^2/\text{s}$, whereas thermal diffusivity coefficient of snakehead fish was $0.671 \times 10^{-7} \text{ m}^2/\text{s}$ (Sun, 2006).

Specific heat of a material is affected by its composition which consisted of protein content, lipid content, carbohydrate content, water content and ash content.

Specific heat will increase if water content of material is increase and vice versa. Specific heat value is directly proportional to thermal conductivity value of a material. Heat transfer rate is affected by thermal properties of material (k dan C_p), initial water content of material, chemical composition of material and temperature of boiling water. Differences in heat conductivity coefficient of pempek was due to differences in temperature and material formulation because heat conductivity coefficient of a material is depend on structure, form, porosity and homogeneity of

material. This in turn affect the different in heat transfer direction. Heat conductivity (k) is a constant value of material which show material capability to transfer calor or heat conductivity is the rate of calor flow within material. The denser of a material, the lower is its heat conductivity and vice versa.

Thermal diffusivity coefficient of pempek lenjer by using numerical model was in the range of 1.36 to $1.62 \times 10^{-7} \text{ m}^2/\text{s}$. Thermal diffusivity coefficient of pempek lenjer based on chemical composition was in the range of 1.302 to $1.478 \times 10^{-7} \text{ m}^2/\text{s}$, whereas thermal diffusivity coefficient based on analytical method was in the range of 1.313 to $1.483 \times 10^{-7} \text{ m}^2/\text{s}$. Thermal diffusivity coefficients based on numerical model, chemical composition and analytical method were relatively similar so that numerical model can be used because it can detect the changes in temperature and thermal diffusivity at each observation unit (minute) during pempek lenjer boling process.

CONCLUSION

1. Thermal diffusivity coefficients based on numerical model, chemical composition and analytical method were relatively similar so that numerical model can be used because it can detect the changes in temperature and thermal diffusivity at each observation unit (minute) during pempek lenjer boling process.
2. Thermal diffusivity coefficient of pempek lenjer by using numerical model was in the range of 1.36 to $1.62 \times 10^{-7} \text{ m}^2/\text{s}$. Thermal diffusivity coefficient of pempek lenjer based on chemical composition was in the range of 1.302 to $1.478 \times 10^{-7} \text{ m}^2/\text{s}$, whereas thermal diffusivity coefficient based on analytical method was in the range of 1.313 to $1.483 \times 10^{-7} \text{ m}^2/\text{s}$.

3. Formula of fish dominant pempek lenjer required boiling time of 22 minutes with center point temperature of 87 °C, whereas formula of tapioca flour dominant pempek lenjer required boiling time of 13 minutes with center point temperature of 80 °C.

REFERENCES

1. Ansari F A, Abbas K A, Hasyim D M and Sapuan S M (2007), "Effect of Skin Removal From Spherical Fruits and Vegetables", *Am. J. Food Technol.*, Vol. 2, No. 4, pp. 295-300.
2. Crank J (1998), *The Mathematics of Diffusion*, Published in The United States by Oxford University Press Inc. New York.
3. Fasina B E Farkas and Fleming H P (2003), "Thermal and Dielectric Properties of Sweetpotato Puree", *International J. Food Properties*, Vol. 6, No. 3, pp. 461-472.
4. Fontana A J, Wacker B, Campbell C S, and Campbell G S (2001), *Simultaneous Thermal Conductivity, Thermal Resistivity, and Thermal Diffusivity Measurement of Selected Foods and Soils*. The Society for Engineering in Agricultural, Food and Biological System, California, USA.
5. Fournier D, Roger J P, Bellouati A, Boue C, Stamm H, and Lakestani F (2001), "Correlation Between Hardness and Thermal Diffusivity", *Analytical Sci.*, No. 17, pp. 158-160.
6. Gerald C F (2005), *Applied Numerical Analysis*, Addison-Wisley Publishing Company.
7. Haryadi (1995), *Starch Chemistry and Technology*, Graduate School Program, Gadjah Mada University, Yogyakarta.
8. Heldman D R and Lund D B (2007), *Handbook of Food Engineering*, Marcel Dekker Inc, New York.
9. Holman J P (1996), *Heat Transfer*, Mc Graw Hill, New York.
10. Huang L and Liu L S (2009), "Simultaneous Determination of Thermal Conductivity and Thermal Diffusivity of Food and Agricultural Materials Using a Transient Plane-Source Method", *J Food Engin.*, Vol. 95, pp. 179-185.
11. Jaczynski J and Park J W (2002), "Temperature Predicting During Thermal Processing of Surimi Seafood", *J Food Engin and Phy Properties*, Vol. 34, No. 1.
12. Jain D and Pathare P B (2007), *Determination of Thermal Diffusivity of Freshwater Fish During Ice Storage By Using One Dimensional Fourier Cylindrical Equation*, Central Institute of Post Harvest Engineering and Technology, PAU Campus Ludhiana, India.
13. Karneta R (2010), "Economic Feasibility Analysis and Optimization of Industrial Scale of Pempek Lenjer Formulation", *J of Human Development*, Vol. 4, No. 3, pp. 264-274.
14. Manalu L P and Abdullah K (1998), "Determination of Thermal Diffusivity and Conductivity of Carrot (*Daucus carota L*)", *Bul of Agricultural Engineering*, Vol. 12, No. 2, pp. 32-38.
15. Moura S C, Jardim D L, and Sadahira M S (1998), "Thermophysical Properties of Tropical Fruit Juices", *J. Food Tech.*, Vol. 1, No. 12, pp. 70-76.
16. Olivera D F and Salvodari (2008), "Finite Element Modeling of Food Cooking", *Lat Am Appl Res.*, Vol. 38, pp. 377-383.

17. Opaku A, Tabil L G, Crear B and Shaw M D (2006), "Thermal Conductivity and Thermal Diffusivity of Timothy Hay", *Can Biosys Engin.*, Vol. 48, pp. 31-37.
18. Park J J (2001), "Temperature Prediction During Thermal Processing of Surimi Seafood", *J. Food Sci and Tech*, pp. 3053-3057.
19. Richana N and Titi C (2004), "Characteristic of Physicochemical Properties of Tuber Flour and Starch Flour from Tubers of Ganyong, Suweg, Sweet Potato and Gembili", *J of Postharvest*, Vol. 1, No. 1, pp. 29-37.
20. Silalahi F R and Tambunan A (2005), "Measurement of Thermal Diffusivity and Dielectric Properties at Radio Frequency of Andaliman", *Bul Agri Eng Bearing*, Vol. 1, No. 2, pp. 55-61.
21. Singhal D K, Singh U and Singh AK (2008), "Effective Thermal Diffusivity of Persishable Produce as a Function of Temperature by Transient Method", *J. Pure & Appl Physics*, Vol. 46, pp. 862-865.
22. Sun D W (2006), *Thermal Food Processing; New Technologies and Quality Issues* (edited), CRC Taylor and Francis Group, New York.
23. Suroso (2006), "Development of Thermal Diffusivity Measurement Method for Agricultural Products Using Inversion Method", *J. of Agricultural Engineering*, Vol. 20, No. 1, pp. 65-73.
24. Suzuki T (1981), *Fish and Krill Protein*, Applied Science Publishing Ltd. New York.
25. Tastra I K, Ginting G and Ratnaningsih (2006), "Thermal Diffusivity of Sweet Potato Flour Measured Using Dickerson Method", *J. of Agricultural Engineering*, Vol. 20, No. 2, pp. 149-156.

NOMENCLATURE

α = thermal diffusivity (m^2/s)

k = thermal conductivity ($J/m \cdot ^\circ C \cdot s$)

ρ = density (kg/m^3)

C_p = specific heat ($J/kg \cdot ^\circ C$)

A = temperature gradient rate ($^\circ C/min$)

P = protein

F = lipid

C = carbohydrate

F_i = fiber

A = ash

M = water

c = concentration

T = temperature

t = time

r = material center point



International Journal of Engineering Research and Science & Technology

Hyderabad, INDIA. Ph: +91-09441351700, 09059645577

E-mail: editorijerst@gmail.com or editor@ijerst.com

Website: www.ijerst.com



NUMERICAL MODEL OF THERMAL DIFFUSIVITY FOR PEMPEK LENJER BOILING

ORIGINALITY REPORT

8%

SIMILARITY INDEX

9%

INTERNET SOURCES

4%

PUBLICATIONS

1%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

2%

★ uknowledge.uky.edu

Internet Source

Exclude quotes On

Exclude bibliography On

Exclude matches < 1%