

ISSN: 2088-5334

Vol. 7 (2017) No. 6

International Journal on Advanced Science Engineering Information Technology

Available online at
<http://ijaseit.insightsociety.org>

Advanced Science Image processing image retrieval microprocessor
Back Projection fuzzy Engineering alumina Gait analysis Biometric
Mobile Agent Interpolation Soft Tissue hydrothermal stability Outlier filter
Sampling Theorem Magnetic field porous structure acidity Wireless
Parsimony Database Server Robot Operation Life Cycle Cost
Graphical User Interface Virus Compression Strength Energy Saving
Current shaping Phylogenetic Analysis Sensor Networks Image Optimization
Metamorphic Virus neural network Predictive Tools Energy Optimization
parallel port Obfuscation Techniques Admixure Router Image matching
Power factor Boost regulator catalyst Construction Delay Support Vector Machine Regression Analysis
breast phantom Effects of Delay Current harmonics Surveillance
Information Technology soybean



[HOME](#) [ARCHIVES](#)

Vol. 7 (2017) No. 6

Articles

Advancement of TDR Technique for Locating Power Cable Insulation Degradation

Tze Mei Kuan, Azrul Mohd. Ariffin, Maria Madelina Bemmyner Sedau
pages: 1976-1982 [Full text](#) DOI:10.18517/ijaseit.7.6.2315

Design and Implementation of Power Plant High-Side Voltage Controller for Coordinated Voltage Control

Muhamad Tarmizi Azmi, Sheikh Kamar Sheikh Abdullah, Mohd Khairun Nizam Mohd Sarmin, Nira Saadun, Nik Sofizan Nik Yusuf
pages: 1983-1990 [Full text](#) DOI:10.18517/ijaseit.7.6.2304

Sizing Optimization of Hybrid Stand Alone Photovoltaic System

Zulkifli Othman, Shahril Irwan Sulaiman, Ismail Musirin, Ahmad Maliki Omar, Sulaiman Shaari, Muhammad Zakyizzuddin Rosselan
pages: 1991-1997 [Full text](#) DOI:10.18517/ijaseit.7.6.2334

Determining of Drying Characteristics for South Sumatera Low Rank Coal using Solar and Laboratory Scaled Oven

Irwin Bizzy, Riman Sipahutar, Eddy Ibrahim, Muhammad Faizal
pages: 1998-2003 [Full text](#) DOI:10.18517/ijaseit.7.6.2006

Bending Failure Analysis at HPFRC Plates with Various Depth and Loading Program

Krisnamurti Krisnamurti, Agoes Soehardjono, Achfas Zacoeb, Ari Wibowo
pages: 2004-2011 [Full text](#) DOI:10.18517/ijaseit.7.6.2557

Optimizing Economic Load Dispatch with Renewable Energy Sources via Differential Evolution Immunized Ant Colony Optimization Technique

N. A. Rahmat, N. F. A. Aziz, M. H. Mansor, Ismail Musirin
pages: 2012-2017 [Full text](#) DOI:10.18517/ijaseit.7.6.2328

Visual Basic GUI for an Improved of M&V Framework Considering Risk Assessment

Nor Shahida Razali, Nofri Yenita Dahlan, Wan Faezah Abbas, Hasmaini Mohamad
pages: 2018-2026 [Full text](#) DOI:10.18517/ijaseit.7.6.2338

Cause and Effect Prediction in Manufacturing Process Using an Improved Neural Networks

Nazri M. Nawi, Noorhamreeza Abdul Hamid, Noor Azah Samsudin, Zawati Harun, Mohd Firdaus Ab Aziz, Azizul Azhar Ramli
pages: 2027-2034 [Full text](#) DOI:10.18517/ijaseit.7.6.2384

Problem-based Learning for Programming Education

Aminah Bibi Bawamohiddin, Rozilawati Razali
pages: 2035-2050 [Full text](#) DOI:10.18517/ijaseit.7.6.2232

Metadata Schema for Traditional Knowledge

Dana Indra Sensuse, Handrie Noprison, Yudho Giri Sucahyo, Lukman Lukman
pages: 2051-2062 [Full text](#) DOI:10.18517/ijaseit.7.6.1983

IJASEIT

[About](#)

[Editorial Board](#)

[Guide for Authors](#)

[Journal Contact](#)

[Online Submission](#)

[Peer Review Policy](#)

[Publication Ethics](#)

[Browse Authors](#)

[NEW Update : IJASEIT in Scopus](#)

[NEW Update : IJASEIT in Scimago JR](#)

Scopus CiteScore

1.9 ²⁰²⁰ CiteScore
65th percentile
Powered by Scopus

Scimago Journal Rank

The Map Authors

Using Tags for Measuring the Semantic Similarity of Users to Enhance Collaborative Filtering Recommender Systems

Ayman S. Ghabayen, Shahrul Azman Mohd Noah
pages: 2063-2070 [Full text](#) DOI:10.18517/ijaseit.7.6.1826

Credit Card Detection System Based on Ridit Approach

Norbaiti Tukiman, Norhaiza Ahmad, Suhana Mohamed, Zarith Sofiah Othman, CT Munirah Niesha Mohd Shafee, Zairi Ismael Rizman
pages: 2071-2077 [Full text](#) DOI:10.18517/ijaseit.7.6.1316

A Comparative Analysis of Rough Sets for Incomplete Information System in Student Dataset

Rd Rohmat Saedudin, Shahreen Kasim, Hairulnizan Mahdin, Iwan Tri Riyadi Yanto
pages: 2078-2084 [Full text](#) DOI:10.18517/ijaseit.7.6.2161

ChilDiBu – A Mobile Application for Bulgarian Children with Special Educational Needs

Radoslava Stankova Kraleva
pages: 2085-2091 [Full text](#) DOI:10.18517/ijaseit.7.6.2922

Application of Argon Plasma Jet for Methane Hydrate Decomposition by Radio Frequency Irradiation

Ismail Rahim, Shinfuku Nomura, Shinobu Mukasa, Hiromichi Toyota, Muhammad Agung, Novriany Amaliyah
pages: 2092-2099 [Full text](#) DOI:10.18517/ijaseit.7.6.2638

Fertility In Local Pesisir Cattle Following Ovsynch and Co-Synch Protocols Of Estrus Synchronization In West Sumatra

Zaituni Udin, - Hendri, - Masrizal
pages: 2100-2107 [Full text](#) DOI:10.18517/ijaseit.7.6.2156

Structural Behaviour of Steel Building with Modified X-Braced EBF (Eccentrically Braced Frames) by Pushover Analysis

Yakni Idris, - Saloma, - Hanafiah, - Federico
pages: 2108-2114 [Full text](#) DOI:10.18517/ijaseit.7.6.2291

Estimating Water Footprint of Palm Oil Production in PTP Mitra Ogan Baturaja, South Sumatera

Herda Sabriyah Dara Kospa, Kris R.D. Lulofs, Chay Asdak
pages: 2115-2121 [Full text](#) DOI:10.18517/ijaseit.7.6.2451

Evaluation of Socioeconomic Status on Drug Addicted Person

A. Fazillah, E. Toriman, H. Juahir, A. Izwan, N. Mohamad, A. Ismail
pages: 2122-2130 [Full text](#) DOI:10.18517/ijaseit.7.6.1009

Physiological and Morphological Responses to Ozone Exposure of Coleus (Solenostemon scutellarioides (L.) Codd)

Mohamad Padri, Chanin Umponstira
pages: 2131-2138 [Full text](#) DOI:10.18517/ijaseit.7.6.2636

Land Cover Classification using Object-Based Image Analysis of SPOT-6 Imagery for Land Cover and Forest Monitoring in Nagan Raya, Aceh – Indonesia

Inggit Lolita Sari, Stephen Fildes
pages: 2139-2144 [Full text](#) DOI:10.18517/ijaseit.7.6.3426

Optimum Condition for the Application of Enzyme-Mediated Calcite Precipitation Technique as Soil Improvement Technique

Heriansyah Putra, Hideaki Yasuhara, Naoki Kinoshita
pages: 2145-2151 [Full text](#) DOI:10.18517/ijaseit.7.6.3425


Hydroxyapatite Coating on Titanium Alloy Ti-6Al-4V with Electrophoretic Deposition (EPD) for Dental Root Application

Dian Juliadmi, Vania Raissa Fauzi, Gunawarman Gunawarman, Hadi Nur, Mohd. Hasbullah Idris
pages: 2152-2158 [Full text](#) DOI:10.18517/ijaseit.7.6.3497

Dental X-ray Image Segmentation using Gaussian Kernel-Based in Conditional Spatial Fuzzy C-means



Keywords Cloud

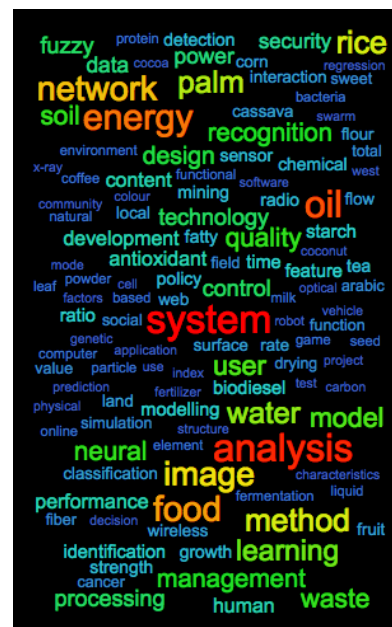

Published by



Member of



Arna Fariza, Agus Zainal Arifin, Eha Renwi Astuti
pages: 2159-2167 [Full text](#) DOI:10.18517/ijaseit.7.6.3073

Comparison of the Methods to Estimate Missing Values in Monthly Precipitation Data

Wahidah Sanusi, Wan Zawiah Wan Zin, Usman Mulbar, Muhammad Danial, Syafruddin Side
pages: 2168-2174 [Full text](#) DOI:10.18517/ijaseit.7.6.2637

The Mechanism of Erythrocytes Aggregation in EDTA-Blood of Ovarian Cancer Patients Viewed by Coulomb's Law

Kuncoro Asih Nugroho, Kamsul Abraha, Ngadikun .
pages: 2175-2182 [Full text](#) DOI:10.18517/ijaseit.7.6.3159

Developing a Stochastic Model of Queue Length at a Signalized Intersection

Herman Y Sutarto, Endra Joelianto, Tunggal Arief Nugroho
pages: 2183-2188 [Full text](#) DOI:10.18517/ijaseit.7.6.2820

Subsurface Corrosion Imaging System Based on LASER Generated Acoustic (LGA)

Andreas Setiawan, Gede Bayu Suparta, Mitrayana Mitrayana, Waskito Nugroho
pages: 2189-2196 [Full text](#) DOI:10.18517/ijaseit.7.6.2816

Video-Based Stylized Rendering using Frame Difference

Seung Taek Ryoo, Yeong Kwon Kim, Hun Joo Lee, Sang Hyun Seo
pages: 2197-2202 [Full text](#) DOI:10.18517/ijaseit.7.6.2729

Design and Implementation of a Software System for High Level Business Rules

Deepak Kumar Sharma, Naveen Prakash, Manish Mahajan, Dheerendra Singh
pages: 2203-2212 [Full text](#) DOI:10.18517/ijaseit.7.6.2797

Implementation of Robot Operating System in Beaglebone Black based Mobile Robot for Obstacle Avoidance Application

Mohamad Fauzi Zakaria, Joo Chin Shing, Mohd Razali Md Tomari
pages: 2213-2219 [Full text](#) DOI:10.18517/ijaseit.7.6.3221

Rice Seed Varieties Identification based on Extracted Colour Features using Image Processing and Artificial Neural Network (ANN)

Aimi Athirah Aznan, Rashidah Ruslan, Ibni Hajar Rukunudin, Fathin Ayuni Azizan, Ahmad Yusuf Hashim
pages: 2220-2225 [Full text](#) DOI:10.18517/ijaseit.7.6.2990

Experimental Verification of Interfacial Strength Effect on the Mechanical Properties of Carbon Fiber-Epoxy Composite

Bentang Arief Budiman, Firman Bagja Juangsa, Muhammad Aziz, Ignatius Pulung Nurprasetyo, Ilman Nuran Zaini
pages: 2226-2231 [Full text](#) DOI:10.18517/ijaseit.7.6.2781

The Influence of Steel Fibers Extracted from Waste Tyre on Properties of Concrete Containing Fly Ash

- Fauzan, Febrin Anas Ismail, Rio Sandi, Zev Al Jauhari
pages: 2232-2236 [Full text](#) DOI:10.18517/ijaseit.7.6.3522

Making Retention Pond as an Attractive Element for Site Planning at Lowland Housing Area

Widya Fransiska F Anwar, Fuji Amalia
pages: 2237-2243 [Full text](#) DOI:10.18517/ijaseit.7.6.3213

Hydrothermal Alteration Mineralogy Associated with Gold Mineralization in Buladu Area, Gorontalo, Northern Sulawesi, Indonesia

Ulva Ria Irfan, Irzal Nur, Muhammad Kasim
pages: 2244-2250 [Full text](#) DOI:10.18517/ijaseit.7.6.3837

Performative Improvement of Solar-Biomass Hybrid Dryer for Fish Drying

Yuwana Yuwana, Bosman Sidebang
pages: 2251-2257 [Full text](#) DOI:10.18517/ijaseit.7.6.1854

The Composition of Syngas and Biochar Produced by Gasifier from Viet Nam Rice Husk

Nguyen Huy Bich, Nguyen Van Lanh, Bui Ngoc Hung

pages: 2258-2263 [Full text](#) DOI:10.18517/ijaseit.7.6.2623

DNA Isolation and Optimization of ISSR-PCR Reaction System in *Oryza sativa* L.

Azhar Mohamad, Arshad Naji Alhasnawi, Ahsan A. Kadhimi, Anizan Isahak, Wan Mohtar Wan Yusoff, C.M.Z

Che Radziah

pages: 2264-2272 [Full text](#) DOI:10.18517/ijaseit.7.6.1621

Comparative Study of Length and Growth Rate of Ramie (*Boehmeria nivea* L. Gaut.) Bast Fiber of Indonesian Clones

Tesri Maideliza, Reni Mayerni, Dewi Rezki

pages: 2273-2278 [Full text](#) DOI:10.18517/ijaseit.7.6.1335

An Investigation of Food Quality and Oil Stability Indices of Muruku by Cluster Analysis and Discriminant Analysis

Abbas F. M. Alkarkhi, Nik Aisyah Nik Muhammad, Wasin A. A. Alqaraghuli, Yusri Yusup, Azhar Mat Easa, Nurul Huda

pages: 2279-2285 [Full text](#) DOI:10.18517/ijaseit.7.6.2814

A New Model to Collect Customer's Information from In-App-Purchases in Mobile Games

Pratyaksa Ocsa Nugraha Saian, Andy Januar Wicaksono, Suyoto Suyoto

pages: 2286-2293 [Full text](#) DOI:10.18517/ijaseit.7.6.2446

Usability Evaluation of the Hospital Management Information System: Case Study of an Emergency Installation Application of a Regional Public Hospital

Harry Budi Santoso, Azka Khairun Nisa, Rian Fitriansyah

pages: 2294-2301 [Full text](#) DOI:10.18517/ijaseit.7.6.2269

Convolutional Neural Networks and Deep Belief Networks for Analysing Imbalanced Class Issue in Handwritten Dataset

A'inur A'fifah Amri, Amelia Ritahani Ismail, Abdullah Ahmad Zarir

pages: 2302-2307 [Full text](#) DOI:10.18517/ijaseit.7.6.2632

Adaptation Measures of Farmers in Response to Climate Change in Bicol Region, Philippines

Ma. Teresa Bombais Lirag, Arthur Estrella

pages: 2308-2315 [Full text](#) DOI:10.18517/ijaseit.7.6.4325

Vegetations as Beach Protection: Simulations of Root Protection Mechanism Against Abrasion

Abdul Hakam, Bambang Istijono, Taufika Ophiyandri

pages: 2316-2321 [Full text](#) DOI:10.18517/ijaseit.7.6.3445

Screening and Identification of Upland Rice Lines Derived Recurrent Selection for Drought Tolerance

Reny Herawati, - Masdar, Dwi Wahyuni Ganefianti, Bandi Hermawan, - Alnopri

pages: 2322-2327 [Full text](#) DOI:10.18517/ijaseit.7.6.2955

E-health-IoT Universe: A Review

Noemi Scarpato, Alessandra Pieroni, Luca Di Nunzio, Francesca Fallucchi

pages: 2328-2336 [Full text](#) DOI:10.18517/ijaseit.7.6.4467

E-Government Service Quality Based on E-GovQual Approach Case Study in West Sumatera Province

- Albar, HA Mooduto, A Ahmad Dahlan, - Yuhefizar, - Erwadi, Darmawan Napitupulu

pages: 2337-2342 [Full text](#) DOI:10.18517/ijaseit.7.6.4226

Pattern Recognition and Classification Using Backpropagation Neural Network Algorithm for Songket Motifs Image Retrieval

- Yuhandri, Sarifuddin Madenda, Eri Prasetyo Wibowo, - Karmilasari

pages: 2343-2349 [Full text](#) DOI:10.18517/ijaseit.7.6.2200

Published by INSIGHT - Indonesian Society for Knowledge and Human Development

◆ IJASEIT - ISSN: 2088-5334 | e-ISSN : 2460-6952 | DOI : 10.18517



is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.

00990660 [View My Stats](#)

Structural Behaviour of Steel Building with Modified X-Braced EBF (Eccentrically Braced Frames) by Pushover Analysis

Yakni Idris[#], Saloma[#], Hanafiah[#], and Federico[#]

[#]Civil Engineering Department, Sriwijaya University, Indralaya, Sumatera Selatan 30662, Indonesia
E-mail: saloma_571@yahoo.co.id

Abstract—In this paper, modified X-braced EBF steel frame is designed using pushover analysis. This study discussed five models of a steel building with 10 floors. The dimension of each model is 18 m width, 18 m length, and 4 m height. The building has a function as an office in Palembang. The building uses two types of EBF bracing, that is X with a vertical link and horizontal link. The result of the study shows that X bracing, with horizontal link model, has the best effectiveness to increase building stiffness and strength. Model 5 with X Bracing and horizontal link can reduce storey drift to 57.71 %, and drift ratio is 72.38%. By pushover analysis, this model gained the most effective performance point with base shear of 441.67 ton. The performance of the five building models is immediate occupancy (IO).

Keywords— pushover analysis; performance point; immediate occupancy

I. INTRODUCTION

One of the systems that are used to decrease a risk of damage caused by an earthquake is the bracing system. Generally, the bracing system used in the steel structure. The design of steel structure has three types. They are moment resisting frame (MRF), concentrically braced frame (CBF), and eccentrically braced frame (EBF). EBF is a combination of two conventional bracing systems namely MRF and CBF. The characteristic of bracing EBF has link beam. The usage of EBF is to reduce the seismic load. Bracing EBF has bigger ductility compared to MRF and CBF, so that the energy dissipation capacity increased [1], [2], [3]. In EBF system, the usage of vertical link caused base shear decreased compared to horizontal link so that EBF has been found small displacement and energy dissipation increased [4], [5]. This paper discussed the response of steel structure to resist earthquake by pushover analysis. There are five models of a steel structure with ten floors using X bracing with a vertical link and horizontal link. The length of link beam is 1 m. The purpose of this study is to analyses plastic hinge distribution, to investigate the first plastic hinge formation, to determine the performance level of the building based on ATC-40, and to evaluate the effectiveness of the models to reduce seismic energy. The scope of the discussion in this study is seismic performance analysis by pushover analysis. The result is drift storey, drift ratio, capacity curve, performance level, and plastic hinge formations and propagation.

Pushover analysis can be used for indicating the damage of structures. Pushover analysis is a way of nonlinear static analysis by simplification of the time history nonlinear analysis [6], [7], [8]. Pushover analysis is done by applying an incremental load in a structure until a certain condition. The static load value increased gradually which caused the first yield. Pushover analysis identified the weakness in structure so that the structural element can be strengthened based on the weakness. Pushover analysis produced pushover curve which describes the correlation between shear and displacement. Pushover analysis also produced the comparison of performance level to structure [9], [10], [11]. The main steps of pushover analysis are [12], [13]:

- Determine point control to monitor the structure displacement
- Calculate capacity curve based on several kinds of lateral force distribution
- Estimation of lateral displacement
- Evaluate structure performance level with control point on target displacement based on ATC-40

As can be seen from Fig. 1, point B represent the yields a condition of the structure. From point B to point C showed the plastic deformation of the structure. Point C, D, and E represent the ultimate capacity, the residual strength, and total failure of structure from pushover analysis.

Point IO-immediate occupancy, LS-life safety, and CP-collapse prevention showed the acceptance criteria when hinge develops in the structure [3].

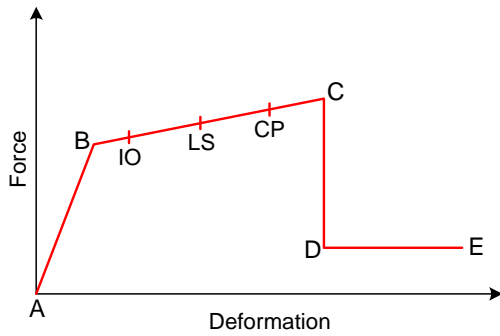


Fig. 1 Pushover curve (ATC-40)

II. MATERIAL AND METHOD

In this study, two model of the frame to be analysed, e.g., moment resisting frame (Model 1), and four eccentrically braced frame (Model 2, Model 3 and Model 4).

Steel sections used in this study are shown in Table 1. The mechanical properties of steel sections with the yield strength 340MPa and E 200,000MPa.

The plan of the building can be seen in Fig. 2, and the thick line (red line) showed the position of the bracing. The span of the beam is 6 m, and the floor height is 4 m, and the building consisted of 10 floors. Fig. 3 showed the five models to be studied.

TABLE I
STEEL SECTIONS USED

Storey	Column Section	Beam Section	Diagonal Bracing	Vertical and Horizontal Bracing
10	W10x100	W16x40	W8x31	W8x48
9	W10x100	W16x40	W8x31	W8x48
8	W10x100	W16x40	W8x31	W8x48
7	W12x120	W16x40	W8x31	W8x48
6	W12x120	W16x40	W8x31	W8x48
5	W12x120	W16x50	W8x31	W8x48
4	W14x176	W16x50	W8x31	W8x48
3	W14x176	W16x50	W8x31	W8x48
2	W14x176	W16x50	W8x31	W8x48
1	W14x370	W16x50	W8x31	W8x48

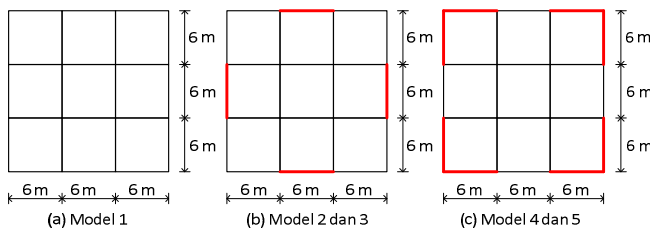


Fig. 2 Building plans

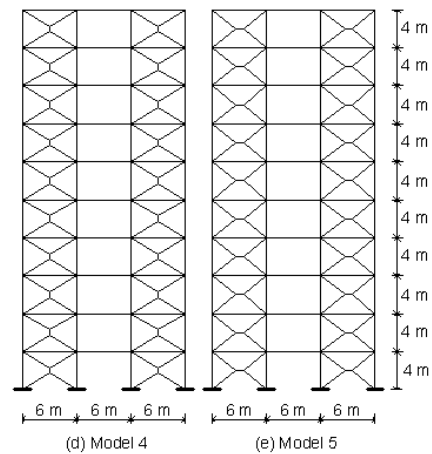
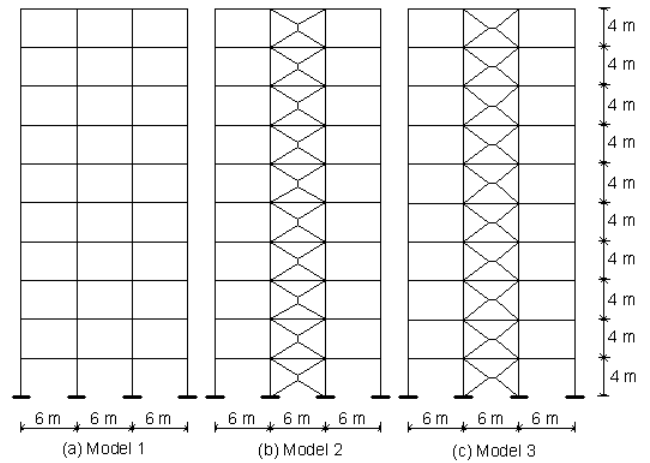


Fig. 3 Structure models

III. RESULTS AND DISCUSSION

A. Building's Mass and Base Shear

The ground motion generates internal forces caused by the building mass vibration. The comparison of building's mass of each model is shown in Table 2 and Fig. 4.

TABLE II
COMPARISON OF BUILDING'S MASS

Storey	Building's mass (ton)				
	Model 1	Model 2	Model 3	Model 4	Model 5
10	136.81	138.19	137.40	139.57	137.99
9	235.96	238.73	237.14	241.49	238.33
8	235.96	238.73	237.14	241.49	238.33
7	236.84	239.61	238.03	242.38	239.21
6	237.80	240.57	238.98	243.33	240.17
5	239.80	242.57	240.99	245.33	242.17
4	242.35	245.12	243.54	247.88	244.72
3	245.03	247.79	246.21	250.56	247.39
2	245.03	247.79	246.21	250.56	247.39
1	254.22	257.75	255.40	261.28	256.59
Σ	2,309.85	2,336.88	2,321.09	2,363.91	2,332.33

The base of a structure is considered to be the level where the ground motions are imparted into the structure. Base shear is an estimate of the maximum expected lateral force that will occur due to seismic ground motion at the base of a structure. Base shear (V) is a function of buildings mass. The comparison of base shear of each model is shown in Table 3 and Fig. 5(a) and 5(b).

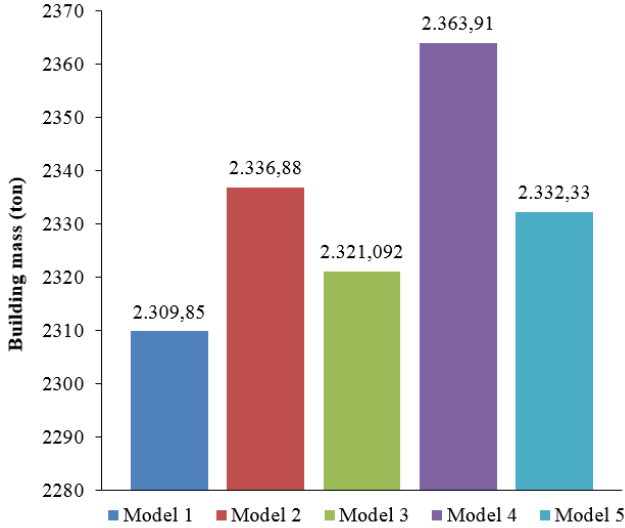


Fig. 4 Comparison of building's mass

TABLE III
COMPARISON OF BASE SHEAR

Model	Scale Factor (g.I/R)		Base Shear (ton)	
	x-direction	y-direction	V_x	V_y
Model 1	1.226	1.226	39.138	33.595
Model 2	1.226	1.226	49.508	44.290
Model 3	1.226	1.226	53.479	51.103
Model 4	1.226	1.226	57.865	52.370
Model 5	1.226	1.226	65.510	63.629

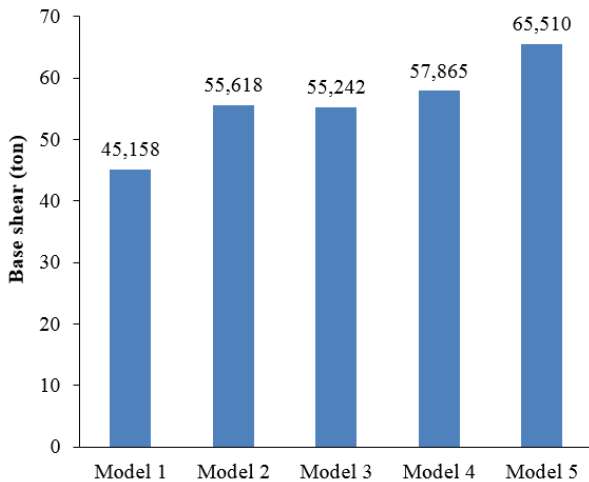


Fig. 5(a) Comparison of base shear V_x

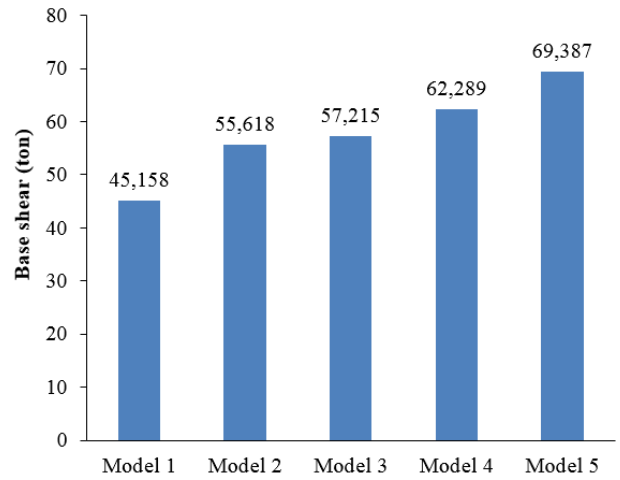


Fig. 5(b) Comparison of base shear V_y

B. Lateral Displacement

The comparison of floor horizontal deflection in x and y directions of each model is shown in Table 4. Based on the analysis results, it can be seen that model 5 with X EBF bracing is the most effective bracing system to reduce horizontal deflection. Model 5 with the horizontal link is capable of reducing deflection to 48.22% on x-direction and 57.71% on y-direction. Graphs of lateral displacements in x and y-direction can be seen in Fig. 6(a) and Fig. 6(b).

TABLE IV
THE COMPARISON OF LATERAL DISPLACEMENT

Model	Δ_{maks} (mm)		Percentage of lateral displacement reduction to model 1	
	x-direction	y-direction	x-direction	y-direction
1	39.403	55.107	0	0
2	28.672	37.362	27.23%	32.20%
3	25.056	29.446	36.41%	46.57%
4	22.910	30.823	41.86%	44.07%
5	20.360	23.286	48.22%	57.71%

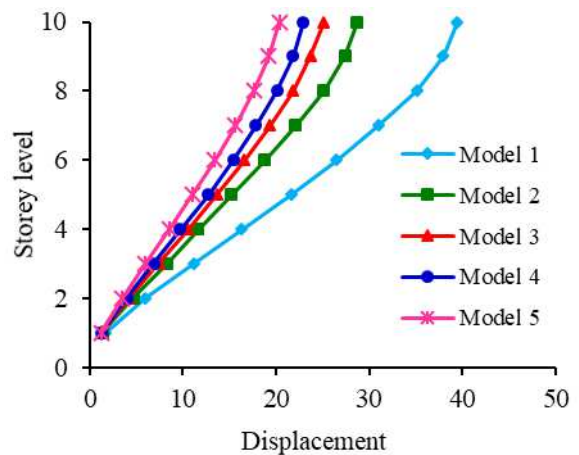


Fig. 6(a) Lateral displacement in x direction (mm)

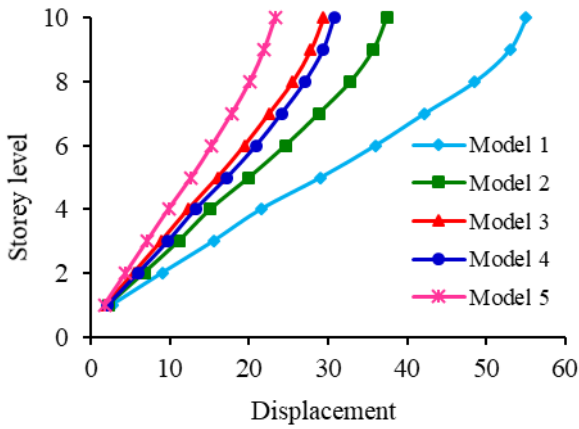


Fig. 6(b) Lateral displacement in y-direction (mm)

C. Drift Ratio

Floor horizontal displacements of each model are shown in Table 5 and 6. Drift ratio of each model are shown in Table 7 and Table 8 and also in Fig. 7(a) and (b).

TABLE V
FLOOR DISPLACEMENT (X DIRECTION)

Storey	δ_x (mm)				
	Model 1	Model 2	Model 3	Model 4	Model 5
10	39.403	28.672	25.056	22.910	20.360
9	37.949	27.364	23.748	21.784	19.179
8	35.108	25.134	21.814	20.078	17.571
7	30.980	22.081	19.334	17.844	15.581
6	26.519	18.752	16.596	15.389	13.368
5	21.604	15.250	13.618	12.670	10.977
4	16.278	11.636	10.455	9.739	8.469
3	11.203	8.251	7.357	6.913	5.993
2	6.024	4.705	4.181	3.986	3.488
1	1.680	1.444	1.324	1.278	1.185

TABLE VI
FLOOR DISPLACEMENT (Y DIRECTION)

Storey y	δ_x (mm)				
	Model 1	Model 2	Model 3	Model 4	Model 5
10	55.107	37.362	29.446	30.823	23.286
9	53.022	35.712	27.805	29.385	21.910
8	48.568	32.779	25.466	27.110	20.068
7	42.185	28.780	22.546	24.112	17.823
6	36.023	24.579	19.394	20.871	15.340
5	29.114	20.005	15.967	17.231	12.656
4	21.532	15.107	12.319	13.238	9.838
3	15.499	11.078	8.947	9.698	7.132
2	8.973	6.692	5.415	5.919	4.373
1	2.724	2.243	1.938	2.103	1.677

Drift ratio is reduced significantly if bracing is used on the steel building. At the fifth floor of model 2, drift ratio is


reduced 50.69% for x-direction and 55.33% for y-direction. At the fifth floor of model 3, drift ratio is reduced 57.53% for x-direction and 64.76% for y-direction. At the fifth floor of model 4, drift ratio is reduced 58.90% for x-direction and 61.91% for y-direction. At the fifth floor of model 5, drift ratio is reduced 65.75% for x-direction and 72.38% for y-direction.

TABLE VII
DRIFT RATIO (X-DIRECTION)


Storey	DRIFT RATIO				
	Model 1	Model 2	Model 3	Model 4	Model 5
10	0.0020	0.0013	0.0013	0.0011	0.0012
9	0.0039	0.0022	0.0019	0.0017	0.0016
8	0.0057	0.0031	0.0025	0.0023	0.0020
7	0.0061	0.0033	0.0027	0.0025	0.0022
6	0.0068	0.0035	0.0030	0.0027	0.0024
5	0.0073	0.0036	0.0032	0.0029	0.0025
4	0.0070	0.0034	0.0031	0.0028	0.0025
3	0.0071	0.0035	0.0032	0.0029	0.0025
2	0.0060	0.0033	0.0029	0.0027	0.0023
1	0.0023	0.0014	0.0013	0.0013	0.0012

TABLE VIII
DRIFT RATIO (Y-DIRECTION)

Storey	DRIFT RATIO				
	Model 1	Model 2	Model 3	Model 4	Model 5
10	0.0029	0.0016	0.0016	0.0014	0.0014
9	0.0061	0.0029	0.0023	0.0023	0.0018
8	0.0088	0.0040	0.0029	0.0030	0.0022
7	0.0085	0.0042	0.0032	0.0032	0.0025
6	0.0095	0.0046	0.0034	0.0036	0.0027
5	0.0104	0.0049	0.0036	0.0040	0.0028
4	0.0083	0.0040	0.0034	0.0035	0.0027
3	0.0090	0.0044	0.0035	0.0038	0.0028
2	0.0029	0.0016	0.0016	0.0014	0.0014
1	0.0061	0.0029	0.0023	0.0023	0.0018

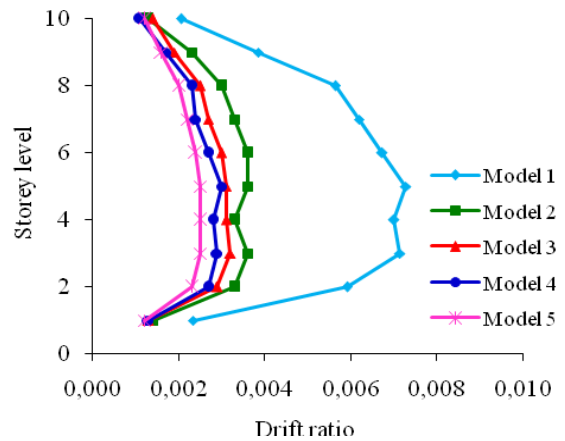

(a) x-direction

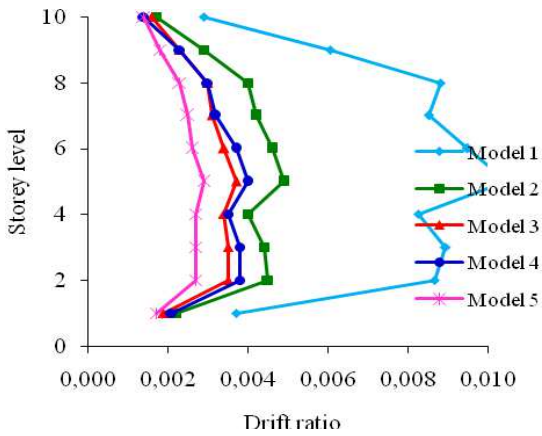

(b) y-direction

Fig. 7 Drift ratio


D. Performance Point and Performance Level

Base shear forces and its corresponding displacements for each model are shown in Table 9, Fig. 8(a), and 8(b). Performance point is a correlation between base shear and displacement. Curve capacity and performance points of the five model can be seen in Fig. 9(a) and 9(b).


The best performance point is shown by model 5 for x or y-direction. In model 5 x direction shear force limit increased 72.33% and displacement decreased 43.34%, while for y-direction shear force limit increased 84.07%, and displacement decreased 52.63%. In model 4 for x-direction, shear force limit increased 53.67%, and displacement decreased 34.07%, while for y-direction shear force limit increased 7.82% and displacement decreased 47.39%. In model 3 for x-direction, shear force limit increased 30.55%, and displacement decreased 33.57%, while for y-direction, shear force limit increased 23.01% and displacement decreased 21.53%. In model 2 for x-direction, shear force limit increased 38.84%, and displacement decreased 25.00%, while for y-direction shear force limit increased 6.88% and displacement decreased 32.39%. The performance level of each model is described in Table 10.

TABLE IX
BASE SHEAR FORCE AND DISPLACEMENT

Model	Base Shear (ton)	Displacement (mm)	Base Shear (ton)	Displacement (mm)
	x-direction		y-direction	
1	256.30	299.10	222.59	372.11
2	355.85	224.31	207.28	251.60
3	334.60	198.69	273.80	292.00
4	393.85	197.21	205.19	195.76
5	441.67	169.48	409.73	176.27

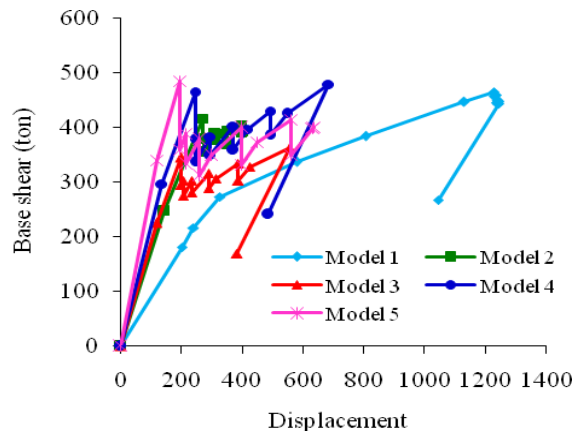


(a) x-direction

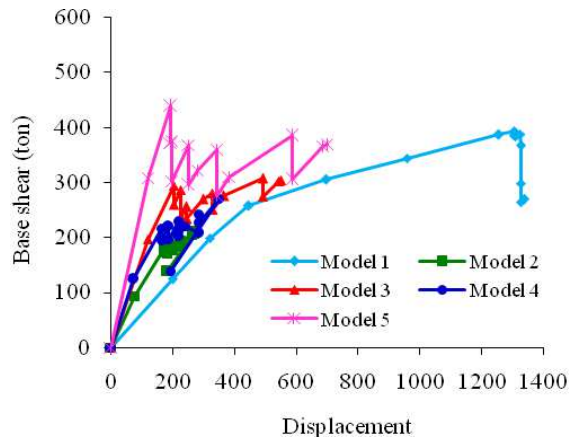


(b) direction

Fig. 8 Base shear force and displacement

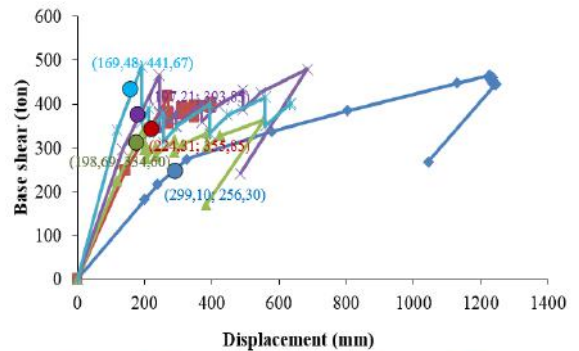

(a) x-direction

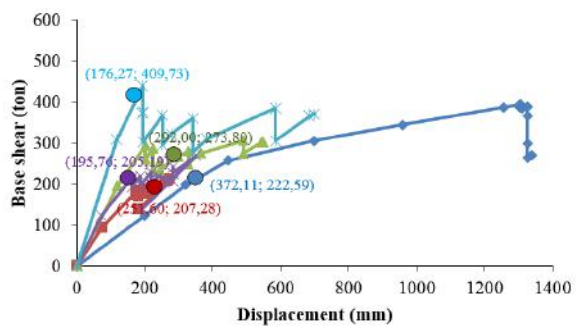

(b) y-direction

Fig. 9 Curve capacity and performance point

TABLE X
PERFORMANCE LEVEL

Model	Maximum total drift	Maximum inelastic drift	Maximum total drift	Maximum inelastic drift	Performance level
	x-direction		y-direction		
1	0.0075	0.0025	0.0093	0.0043	IO
2	0.0056	0.0020	0.0063	0.0044	IO
3	0.0050	0.0020	0.0073	0.0043	IO
4	0.0049	0.0016	0.0049	0.0031	IO
5	0.0042	0.0013	0.0044	0.0015	IO

E. Plastic Hinge Propagation

The beam section deformation where the plastic bending occurs is described as a plastic hinge. Propagation path of the plastic hinges of the 5 models in x-direction was shown in Fig. 10. Propagation path of the plastic hinges of the 5 models were y-direction in shown in Fig. 11.

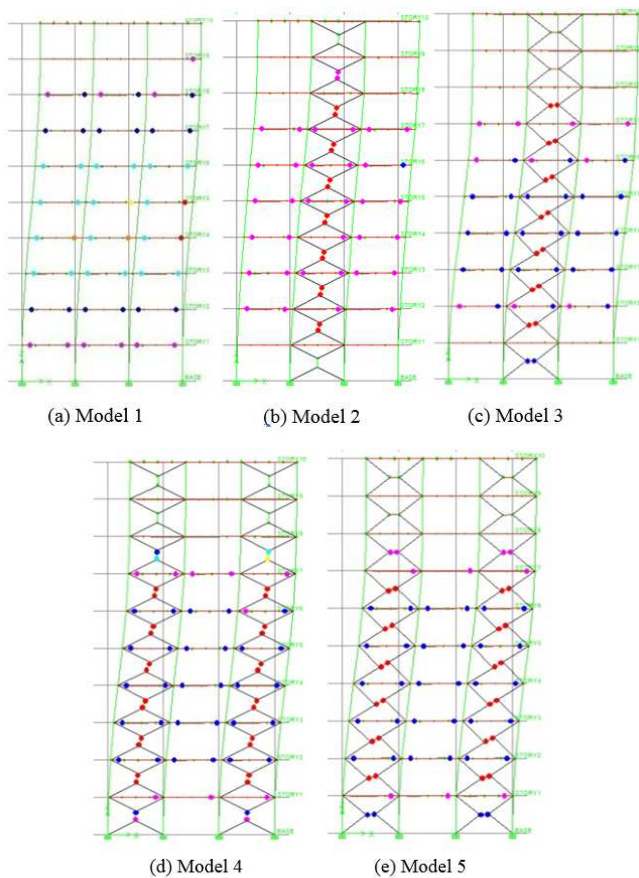


Fig. 10 Plastic hinge propagation in x-direction in step 15

Plastic hinge propagation mechanism of model 1 is shown in Fig. 10(a) dan 11(a). In x-direction, plastic hinge occurred in 15th steps with base shear 268.31 ton, displacement 1.044 mm. There are two red beams which indicate collapse condition. In y-direction, plastic hinge also occurred in steps 15 with base shear 269.24 ton, displacement 1.338 mm. There are six beams collapsed.

The plastic hinge mechanism of model 2 is shown in Fig. 8(b) and 9(b). In x-direction, the plastic hinge occurs in 15th step with base shear 393.13 ton, displacement 399.43 mm. There are two red beams which indicate collapse condition.

In y-direction, plastic hinge also occurred in steps 15 with base shear 137.65 ton, displacement 182.07 mm. There are six beams collapsed. In step 15, some bracing collapsed, while other beams were in the first yielding.

The plastic hinge mechanism of model 3 is shown in Fig. 8(c) and 9(c). In x-direction, the plastic hinge occurs in 15th step with base shear 169.70 ton, displacement 382.18 mm, some bracing has collapsed, and beams come into IO level. In y-direction, the plastic hinge also occurs in steps 15 with base shear 303.54 ton, displacement 549.11 mm, some bracing has collapsed, and beams come into IO level.

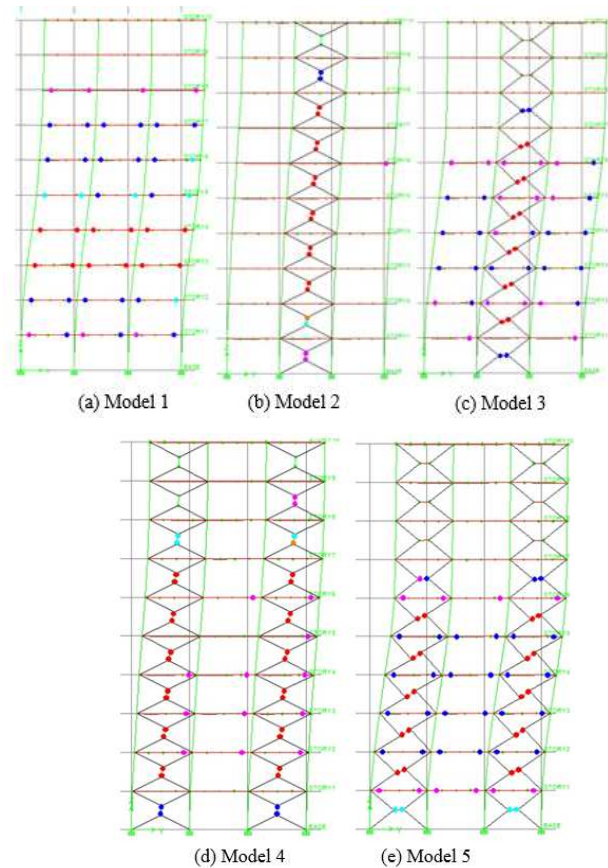


Fig. 11 Plastic hinge propagation in y-direction in step 15

The plastic hinge mechanism of model 4 is shown in Fig. 8(d) and 9(d). In x-direction, the plastic hinge occurs in 15th step with base shear 241.48 ton, displacement 484.74 mm, some bracing has collapsed, and beams come into IO level. In y-direction, the plastic hinge also occurs in steps 15 with base shear 139.39 ton, displacement 192.08 mm, some bracing has collapsed, and beams come into IO level.

The plastic hinge mechanism of model 5 is shown in Fig. 8(e) and 9(e). In x-direction, the plastic hinge occurs in 15th step with base shear 401.31 ton, displacement 636.22 mm, some bracing has collapsed, and beams come into IO level. In y-direction, plastic hinge is also occurred in steps 15 with base shear 370.17 ton, displacement 698.34 mm, some bracing has collapsed, and beams come into IO level.

IV. CONCLUSION

The study of structural response and pushover analysis caused by the earthquake in five models concludes the followings: Floor horizontal displacement in model 5

reduced to 57.71%; The use of bracing model 5 reduced structural response by 72.38%; Performance point of model 5 showed increase in shear force to 84.07% and a decrease in displacement to 52.63%. In this study, the performance level of the five building models is in immediate occupancy (IO).

The sequence of plastic hinge propagation is in accordance with the concept of the strong column weak beam. Plastic hinge formation didn't occur in the columns.

REFERENCES

- [1] ATC-40. *Seismic Evaluation and Retrofit of Concrete Buildings*. Applied Technical Council, California Seismic Safety Commission. Redwood City, California, 1996.
- [2] Marquez, Edelis del V, William Lobo-Q. and J. C. Vielma, *Comparative Analysis of the Energy Dissipation of Steel Buildings with Concentric and Eccentric Braces*, The Open Civil Engineering Journal, Vol 9: Page No. 295-307, 2015.
- [3] N. V. Gunderao, G.S. Hiremath, *Seismic Behavior of Reinforced Concrete Frame with Eccentric Steel Bracings*, SSRG International Journal of Civil Engineering, Vol 2: Page No. 41-46, 2015.
- [4] A. Shahnawaz and J. Raheem, *Comparison of Moment Resisting, Concentrically Braced & Eccentrically Braced Steel Frames*, International Journal for Scientific Research & Development, Vol 3: Page No. 1220-1222, 2015.
- [5] Jouybari, Y. Mozaffari, and A. A. Nikghalb, *Assessment of The Seismic Behavior of Eccentrically Braced Frame with Vertical and Horizontal Link*, International Journal of Civil Engineering and Building Materials, Vol 2: Page No. 39-46, 2012.
- [6] M. I. Khan and K.N. Khan, *Seismic Analysis of Steel Frame with Bracings using Pushover Analysis*, International Journal of Advanced Technology in Engineering and Science, Volume No. 02. Issue No. 07, Page No. 369-381, 2014.
- [7] Hanafiah, Saloma, Yakni Idris, and Julius Yahya, *The Behaviour Study of Shear Wall on Concrete Structure by Pushover Analysis*, International Journal on Advanced Science Engineering Information Technology, vol 7, pp. 1127-1133, 2017
- [8] M.G. Kalibhat, K. Kamath, S.K. Prasad, and R.R. Pai, "Seismic Performance of Concentric Braced steel frames from Pushover Analysis". IOSR Journal of Mechanical and Civil Engineering, Page No. 67-73, 2014.
- [9] R.C. Barros and R. Almeida, *Pushover Analysis of Asymmetric Three-Dimensional Building Frames*, Journal of Civil Engineering and Management, vol. XI, No. 1, pp. 3-12, 2005.
- [10] M.R. Maheri and R. Akbari, *Seismic Behaviour Factor R for Steel X-braced and Knee-braced RC Buildings*, Journal of Engineering Structures 25, pp.1505-1513, 2003.
- [11] Saloma, Yakni Idris, Hanafiah, and Nico Octavianus, *Structural Behaviour of Steel Building with Diagonal and Chevron Braced CBF (Concentrically Braced Frames) by Pushover Analysis*, International Journal on Advanced Science Engineering Information Technology, vol 7, pp. 716-722, 2017.
- [12] FEMA 356, *Prestandard and Commentary for the Seismic Rehabilitation of Buildings*, Federal Emergency Management Agency, Washington DC, 2000.
- [13] FEMA 440, *Improvement of Nonlinear Static Seismic Analysis Procedures*, Applied Technology Council, Redwood City, California, 2005.



KEMENTERIAN RISET, TEKNOLOGI, DAN PENDIDIKAN TINGGI
**UNIT PENELITIAN DAN PENGABDIAN
 PADA MASYARAKAT DAN KERJASAMA
 FAKULTAS TEKNIK UNIVERSITAS SRIWIJAYA**



Jln. Raya Prabumulih KM. 32 Inderalaya (306620) Telp. (0711) 580739-580741 Fax (0711) 580062
 e-mail : ftunsri@plasa.com

**REGISTRASI INTERNATIONAL JOURNAL ON ADVANCED SCIENCE
 ENGINEERING INFORMATION TECHNOLOGY**

Sesuai dengan data yang ada pada kami, maka tulisan dengan judul :

- The Behaviour Study of Shear Wall on Concrete Structure by Pushover Analysis

ISSN : 2088-5334

Penulis : Dr. Ir. Hanafiah, MS

Telah teregistrasi dengan No.

NOMOR REGISTRASI																	
0	3	0	1	0	1	0	2	1	7	0	1	0	1	1	5	3	0
Kode Fakultas	Kode PS/Jurusan		Kode Publikasi	Kode Penulis	Tahun Publikasi	Kode Sumber Tulisan	Sumber Dana	Nomor urut Publikasi dan Fakultas									

Inderalaya, 27 Juli 2018

Unit PMK FT. UNSRI



Abdullah Saleh

Ir. I. Abdullah Saleh MS. M.Eng
 NIP. 195304261984031001