

# 2020 The cooling effect of polycrystalline type PV panels using perforated aluminum plates by Irwin Bizzy dkk 2020

*by Irwin Bizzy*

---

**Submission date:** 24-Mar-2022 08:41PM (UTC+0700)

**Submission ID:** 1791788925

**File name:** els\_using\_perforated\_aluminum\_plates\_by\_Irwin\_Bizzy\_dkk\_2020.pdf (2.55M)

**Word count:** 2984

**Character count:** 14367

**PAPER · OPEN ACCESS**

## The cooling effect of polycrystalline type PV panels using perforated aluminum plates

To cite this article: I Bizzy *et al* 2020 *IOP Conf. Ser.: Mater. Sci. Eng.* **909** 012005

 View the [article online](#) for updates and enhancements.

## The cooling effect of polycrystalline type PV panels using perforated aluminum plates

I Bizzy,<sup>1\*</sup> R Sipahutar<sup>2</sup>, D Puspitasari<sup>3</sup>, A Sofijan<sup>4</sup>, M A Fajri<sup>5</sup>

<sup>1,2,3</sup>Department of Mechanical Engineering, Faculty of Engineering, Sriwijaya University, Indralaya 30662, South Sumatra, Indonesia

<sup>4,5</sup>Department of Electrical Engineering, Faculty of Engineering, Sriwijaya University, Indralaya 30662, South Sumatra, Indonesia

Corresponding Author's e-mail: irwin @unsri.ac.id

**Abstract.** A study has been conducted to improve the efficiency of Polycrystalline type PV panels. This research was conducted at the Energy Technology Research Laboratory, Engineering Faculty, Sriwijaya University, South Sumatra, Indonesia. The disadvantage of PV panel, when receiving solar radiation, it will increase the temperature of the PV panel but decrease the efficiency. This study uses a perforated aluminum plate with hole diameter of 2.5 mm. The plate is placed behind the PV panel. The dimensions of the plate are 960 mm x 600 mm x 20 mm and the number of holes of 1457. The specifications of PV panels are 1020 mm x 670 mm x 30 mm, Polycrystalline type PV panels, maximum power of 100 WP. The results showed that the PV panels given a perforated aluminum plate cooling had higher efficiency than those not given perforated plate cooling.

### 1. Introduction

PV panels have the potential to be developed as energy conversion equipment. These PV panels are able to convert solar energy into electrical energy for countries that have a hot climate all year round. Indonesia is one country that has this potential. South Sumatra Province is one of the regions in Indonesia that has this energy source. Although, this province is a storehouse of energy storage for the country of Indonesia, but the energy reserves taken today are still fossil-based (oil, coal, and gas). This type of energy decreases because it takes a long time to produce this energy again. Therefore, it is time to reduce the use of fossil energy and switch to using this abundant and environmentally friendly source of solar energy. Furthermore, the Indonesian government has made policies to increase the use of new and renewable energy, one of which is the use of solar energy to produce electricity for households, street lights, and traffic signs along the road. In fact, solar energy is one source of energy that can be used as electricity generation and to support transportation and industry.

Based on research results that increasing the temperature of the PV panel will reduce its efficiency [1]. Several ways have been investigated by researchers to improve the efficiency of this PV Panel, such as utilizing Phase Change Material (PCM) technology [2], [3], using water or air as a cooling medium [4], thermoelectric cooling [5], using program [6], etc. Cuce E. et.al., 2011 [7] have used fin cooling to produce better PV panel efficiency compared with without fin cooling. Amelia A. R. et.al., 2016 [8] have done research, the effect of PV panel temperature on its efficiency. The decline in the efficiency of PV panels can be caused by dusk factor on the surface [9]. Even Gholampour M. et.al.,

2014 [10] have research on perforated plates and PV panels. The results show that increasing the air mass flow rate using a fan can increase the PV panel cooling. It has been investigated cooling using a fan so that the temperature of the PV panel decreases and can increase the efficiency of the PV panel [11].


The use of PV panels is to produce electricity for household equipment, vehicles, to drive a pump for irrigation needs, etc. Some of these PV panel [12] consists of PV panel research to produce electricity for Air Conditioning equipment for preserve of agricultural products. Furthermore, Abdul Hadi N K et.al., 2018 [13] on thermal storage uses Phase Change Materials (PCM), in which the PV panel serves as a medium for receiving solar radiation and this system is used to produce a freezer. Adejuyigbe S. B. et.al, 2013 [14] utilize PV panels to conduct electricity for office equipment. Bhattacharjee B. et.al., 2019 [15] utilize PV panels to drive water a pump, and water is used for agricultural and household needs.

In this paper, the problem of PV panel efficiency has been reviewed again when PV panels reserve solar radiation and high temperatures as previous researchers have done. Cooling media used in the form of perforated plates made of aluminum without using a fan to suck hot air or cooling with free convection heat transfer. The perforated aluminum plate is placed at the below of the PV panel. The PV panel used is 100 Wp type Polycrystalline. This research is a continuation of the initial research that has been done but the power of PV panel used is still small, namely 8 Wp Polycrystalline type [16].

## 2. Experimental Procedure

Polycrystalline type PV panel mounted cooling media on the below to reduce the temperature of the panel. The cooling media used is perforated plates. This cooling media is made from aluminum. Figure 1 shows the structure of PV panels and perforated plates.

The PV panel tested consisted of 2 units, namely one unit without cooling media and one unit installed with cooling media in the form of perforated aluminum plates. In addition, some additional equipment was used in this test, such as solar charge control (SCC), batteries, and cables. Measuring instruments used consist of temperature measuring devices using K type thermocouple wire, measuring wind speed using anemometer, and measuring solar radiation intensity using pyranometer equipment, measuring electric current using current meters, and measuring voltage using voltage meters.

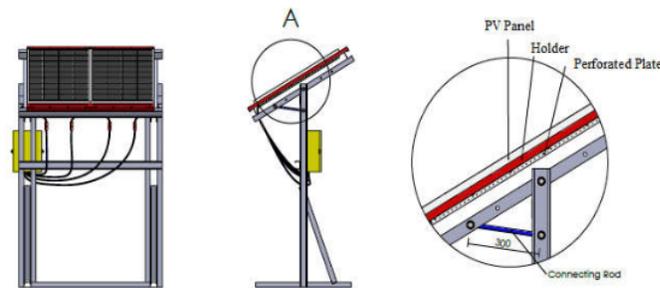

**Figure 1.** Structure of PV panels and perforated plates being tested


The specifications of the PV panels and the cooling media are explained in Table 1.

**Table 1.** PV panel specifications and perforated cooling media


	Spesification	Description
PV Panels:	2	units
Dimension (mm)	1020 x 670 x 30	mm
PV panel type	<i>Polycrystalline</i>	-
Maximum power ( $P_{max}$ )	100	$W_p$
Voltage at $P_{max}$ ( $V_{max}$ )	18	V
Current at $P_{max}$ ( $I_{mp}$ )	5.56	A
Maximum system voltage (DC)	1000	V
Perforated Aluminum Plate:	1	unit
Dimension	960 x 600 x 20	mm
Hole diameter	2.5	mm
Number of holes	1457	holes

### 3. Result and Discussion

Solar radiation that comes to a PV panel surface consists of two kinds, namely direct and diffuse solar radiation. When testing this PV panel, the climate in the South Sumatra Province of Indonesia is a hot climate. The following shows the data taken on February 4, 2020 (Figures 2 through 5).

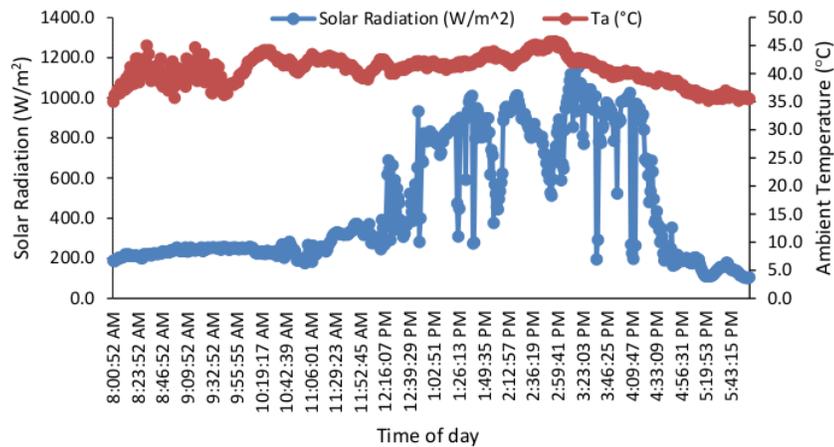


**Figure 2.** Comparison between ambient temperature and solar radiation on February 4, 2020

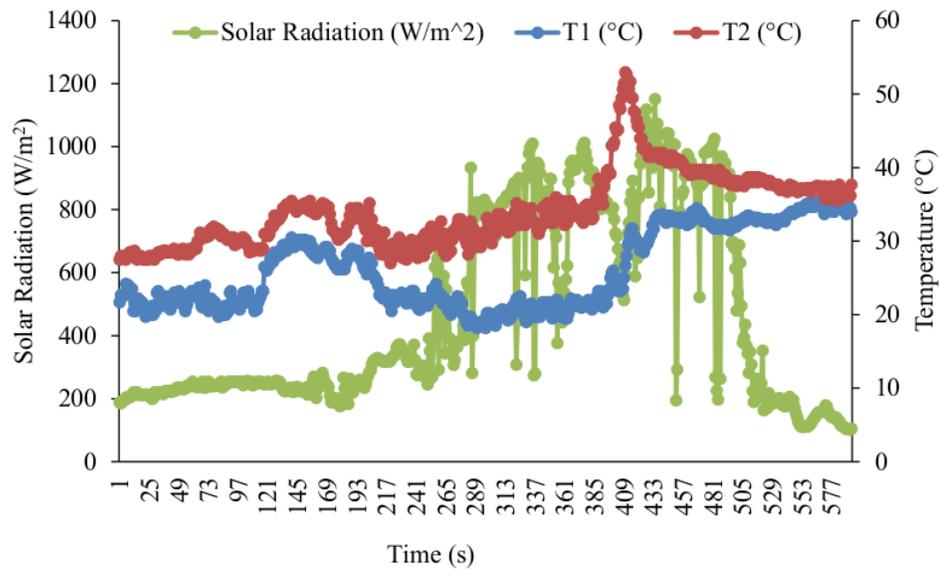


**Figure 3.** Comparison between PV panel surface temperature using perforated plate cooler (T1), PV panel surface temperature without cooler (T2) and solar radiation on February 4, 2020

As shown by the data taken in the field in Figure 3, the surface temperature of PV panels that do not use perforated aluminum plates (T2) is higher than the surface temperatures of PV panels that are cooled with perforated aluminum plates (T1). Likewise, in Figure 4 the opposite occurs, the tendency of the surface temperature under the PV panel not to use perforated aluminum plate (T2-2) is lower than the surface temperature below the panel which uses perforated aluminum plate cooler (T1-2). This event is interesting to study because the power produced by PV panels that use perforated aluminum plate cooler (P1) has higher compared to PV panels that do not use perforated aluminum plate cooler (P2) as shown in Figure 5.

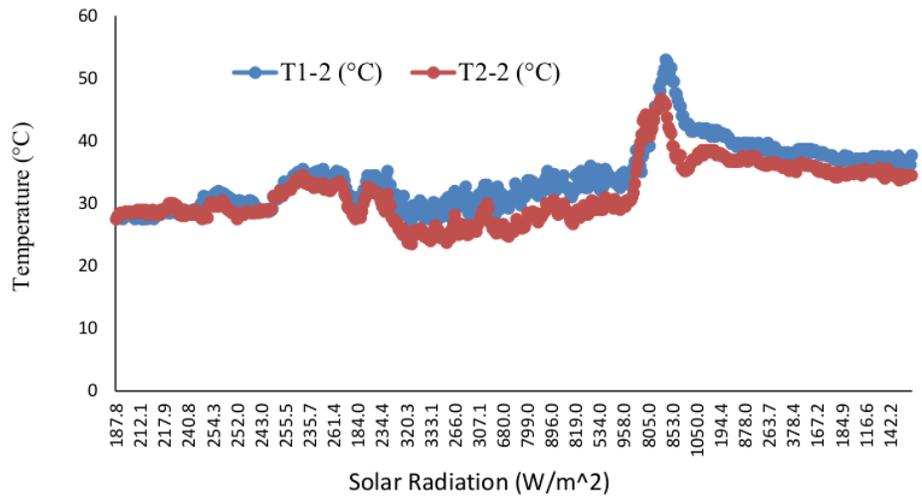

**Figure 4.** Comparison between the below surface temperature of the PV panel using perforated plate cooler (T1-2) and without perforated plate cooler (T2-2) on 4 February 2020

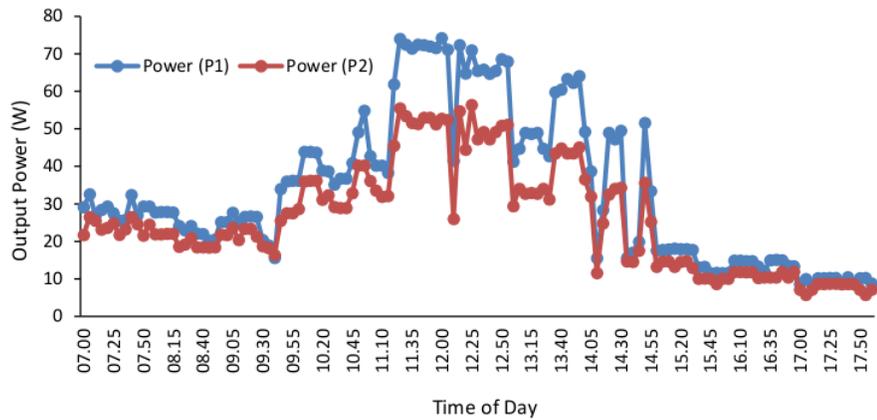

**Figure 5.** Comparison between PV panel output power using perforated plate cooler (P1) and PV panel output power without cooler (P2) on February 4, 2020

Not all of the solar energy coming to the surface of a PV panel can be used as the output power of a PV panel. Some of this energy will be lost to the atmosphere as loss of heat convection. The first, heat loss is the transfer of heat from the top surface of the PV panel to ambient air. The second, heat loss is

the transfer of heat from the back surface of the PV panel to ambient air to holes in the perforated aluminum plate or to ambient air for without perforated aluminum plate.

The intensity of the sun or solar radiation ( $I_R$ ,  $W/m^2$ ) that comes to the surface of the PV panel ( $A_p$ ,  $m^2$ ) will effect the current ( $I$ , Ampere) and voltage ( $V$ , Volt) that produce by a PV panel. The efficiency of the PV panel ( $\eta$ ) is reduced if the intensity of the sun is high as shown in the equation (1). The results of the efficiency calculation are shown in table 2 for Sunny weather conditions, namely January 21, 2020; February 4, 2020; and February 05, 2020.

$$\eta = \frac{V \times I}{I_R \times A_p} = \frac{P}{I_R \times A_p} \quad (1)$$

**Table 2.** PV panel efficiency

Date	$I_R$ ( $W/m^2$ )	PV Panel with perforated aluminum plates			PV Panel without perforated aluminum plates		
		$V_1$ (V)	$I_1$ (A)	$\eta_1$ (%)	$V_2$ (V)	$I_2$ (A)	$\eta_2$ (%)
January 21, 2020	639.5	20.1	0.46	2.12	19.6	0.30	1.35
February 4, 2020	425.1	16.4	2.0	11.29	15.7	1.6	8.65
February 5, 2020	351.8	17.34	1.38	9.95	16.05	1.07	7.14

High average solar radiation has resulted in low PV panel efficiency, so cooling media is needed below the PV panel. Installation of perforated aluminum plate cooling media has increased the efficiency of 100 Wp Polycrystalline PV panels. This perforated aluminum plate media has been useful to increase the efficiency of PV panels. In addition, how to make it simple, inexpensive, and easy to install.

#### 4. Conclusion

A study has been carried out for 100 Wp Polycrystalline PV panels. The PV panel used consists of 2 units, each with a perforated aluminum plate cooler and without a perforated aluminum plate cooler. The diameter of this plate under study is 2.5 mm. Some concluding observations from the investigation are given below.

PV panels that use perforated aluminum plate cooler are better due to an increase in current and voltage output of PV panels compared to without perforated aluminum plate cooler.

The higher solar radiation received by the PV panel will increase the surface temperature of the PV panel but decrease the efficiency of the PV panel. For this reason, a cooling media is needed below the PV panel.

#### Acknowledgment

The author would like to thank the Rector of Sriwijaya University and Dean of the Faculty of Engineering, Sriwijaya University for their motivation and assistance in conducting this research. To the staff of the Energy Technology Laboratory, Faculty of Engineering, Sriwijaya University, a thank you was also conveyed.

**References**

- [1] Dincer F and Meral M E 2010 Critical Factors that Affecting Efficiency of Solar Cells *Smart Grid and Renewable Energy* **01** 47–50
- [2] Machniewicz A, Knera D and Heim D 2015 Effect of Transition Temperature on Efficiency of PV / PCM Panels Effect of transition temperature on efficiency of PV / PCM panels *Energy Procedia* **78** 1684–9
- [3] Rubab S M, Abbas M S, Balasaheb S M, Mateescu T D and Chereches N 2017 A Review Paper on Improving The Efficiency Of Solar Panel *International Research Journal of Engineering and Technology (IRJET)* **4** 1359–61
- [4] Parida B, Iniyana S and Goic R 2011 A review of solar photovoltaic technologies *Renewable and Sustainable Energy Reviews* **15** 1625–36
- [5] Borkar D S, Prayagi S V, Gotmare M J and Ambedkar B 2014 Performance Evaluation of Photovoltaic Solar Panel Using Thermoelectric Cooling *International Journal of Engineering Research* **5013** 536–9
- [6] Zhe L W, Yusoff M I, Razak A A, Misrun M I, Ibrahim S, Fahmi M I and Rosmi A S 2019 Effect of Water Cooling Temperature on Photovoltaic Panel Performance by Using Computational Fluid Dynamics ( CFD ) *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* **1** 133–46
- [7] Cuce E, Bali T and Sekucoglu S A 2011 Effects of passive cooling on performance of silicon photovoltaic cells **6** 299–308
- [8] Amelia A R, Irwan Y M, Leow W Z, Irwanto M, Safwati I and Zhafarina M 2016 Investigation of the Effect Temperature on Photovoltaic ( PV ) Panel Output Performance *International Journal on Advanced Science, Engineering and Information Technology* **6** 682–8
- [9] Reza M, Hizam H, Gomes C, Amran M, Ismael M and Hajighorbani S 2016 Power loss due to soiling on solar panel : A review *Renewable and Sustainable Energy Reviews* **59** 1307–16
- [10] Gholampour M, Ameri M and Sheykh Samani M 2014 Experimental study of performance of Photovoltaic-Thermal Unglazed Transpired Solar Collectors (PV/UTCs): Energy, exergy, and electrical-to-thermal rational approaches *Solar Energy* **110** 636–47
- [11] Yusoff M I, Irwanto M, Zhe L W and Nair G 2016 Cooling on Photovoltaic Panel Using Forced Air Convection Induced by DC Fan Cooling on Photovoltaic Panel Using Forced Air Convection Induced *International Journal of Electrical and Computer Engineering (IJECE)* **6** 526–34
- [12] Sultan M and Miyazaki T 2018 Solar Assisted Evaporative Cooling Based Passive Air-Conditioning System for Agricultural and Livestock Applications *Journal of Engineering Science and Technology* **13** 693–703
- [13] Abdul Hadi N K, Ahmed A M and Roni R T 2018 Experimental Study on Thermal Energy Storage Produced by Solar Energy for Driving Domestic Freezer *Journal of Engineering Science and Technology* **13** 2829–42
- [14] Adejuyigbe S B, Ekiti O, Bolaji B O, Olanipekun M and Adu M 2013 Development of a Solar Photovoltaic Power System to Generate Electricity for Office Appliances *Engineering Journal* **17** 30–9
- [15] Bhattacharjee B, Chakrabarti A and Sadhu P K 2019 Solar Photovoltaic Integrated Pump for Advanced Irrigation System *International Journal of Innovative Technology and Exploring Engineering (IJITEE)* **8** 3246–50
- [16] Bizzy I and Mustafizal L 2018 PV Panel Cooler to Enhance Output Performance Using Perforated Aluminium Plate *Symposium of Emerging Nuclear Technology and Engineering Novelty (SENTEN)* pp 1–4

# 2020 The cooling effect of polycrystalline type PV panels using perforated aluminum plates by Irwin Bizzy dkk 2020

---

## ORIGINALITY REPORT

---

18%

SIMILARITY INDEX

14%

INTERNET SOURCES

16%

PUBLICATIONS

14%

STUDENT PAPERS

---

## MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

---

9%

★ C C S Nindya, D R Anggara, Nuryoto, K Teguh.

"Esterification glycerol (by product in biodiesel production) with oleic acid using mordenite natural zeolite as catalyst: study of reaction temperature and catalyst loading effect", IOP Conference Series: Materials Science and Engineering, 2020

Publication

---

Exclude quotes Off

Exclude matches < 1%

Exclude bibliography On