

Jurnal Irigasi

by Momon Sodik Imanudin

Submission date: 25-May-2021 04:22PM (UTC+0700)

Submission ID: 1593784855

File name: -2019-Journal_Irrigation_and_Drainage_Journal_68_3._488-495.pdf (2.01M)

Word count: 6086

Character count: 30818

1 DETERMINATION OF PLANTING TIME OF WATERMELON UNDER A SHALLOW GROUNDWATER TABLE IN TIDAL LOWLAND AGRICULTURE AREAS OF SOUTH SUMATRA, INDONESIA[†]

MOMON SODIK IMANUDIN*, M.E. ARMANTO AND BAKRI

Department of Soil Science, Faculty of Agriculture, Sriwijaya University, Palembang, Indonesia

ABSTRACT

1 Watermelon cultivation is one of the appropriate alternatives in order to increase farmers' income from tidal lowland agriculture. Research into crop adaptation to wet soil conditions is required to enable farmers to decide the best planting time under various conditions within the existing land classification. The research to determine crop physiological response during the initial growth period was conducted in a greenhouse. This was combined with field treatments based on groundwater table depths at 15, 10 and 5 cm-surface, respectively. Analysis of crop potential based on the water status conditions in the root zone was conducted by using secondary and primary data (daily records). Results of crop adaptation at shallow groundwater table depth showed that the treatments with groundwater table depth of 10 and 5 cm-surface were not significantly different in terms of plant height, with a size of 12.6 and 12.3 cm, having three leaves. However, it had a significant effect on root length, with a length of 11.9 and 3.1 cm, respectively. Maximum plant height of 15.2 cm and four leaves were found for the treatment with a groundwater table depth of 15 cm-surface. It may be concluded that it is best for farmers to plant at a groundwater table depth of 10 cm-surface. © 2019 John Wiley & Sons, Ltd.

KEY WORDS: tidal lowland; watermelon; groundwater table; drainage

Received 15 May 2017; Revised 31 October 2018; Accepted 4 November 2018

RÉSUMÉ

La culture de la pastèque est l'une des alternatives appropriées pour augmenter les revenus des agriculteurs issus de l'agriculture des plaines de marée. Des recherches sur l'adaptation des cultures aux conditions de sol humides sont nécessaires pour permettre aux agriculteurs de décider du meilleur moment de plantation dans diverses conditions dans la classification des terres existante. Les recherches visant à déterminer la réponse physiologique des cultures au cours de la période de croissance initiale ont été menées en serre. Ceci a été combiné avec des traitements sur le terrain basés sur la profondeur de la nappe phréatique à 15, 10 et 5 cm de surface respectivement. L'analyse du potentiel des cultures en fonction des conditions de l'état de l'eau dans la zone racinaire a été réalisée à l'aide de données secondaires et primaires (enregistrements quotidiens). Les résultats de l'adaptation des cultures à la profondeur de la nappe phréatique peu profonde ont montré que les traitements avec une profondeur de la nappe phréatique de 10 et 5 cm n'étaient pas significativement différents en termes de hauteur de plants de 12,6 et 12,3 cm, avec trois feuilles. Cependant, il a eu un effet significatif sur la longueur de la racine avec une magnitude de 11,9 et 3,1 cm, respectivement. Une hauteur de plant maximale de 15,2 cm et quatre feuilles a été trouvée pour le traitement avec une profondeur de nappe phréatique de 15 cm. On peut en conclure que les agriculteurs peuvent mieux planter à une profondeur de la nappe phréatique de 10 cm. © 2019 John Wiley & Sons, Ltd.

MOTS CLÉS: plaine de marée; pastèque; nappe phréatique; drainage

*Correspondence to: Dr Momon Sodik Imanudin, Department of Soil Science, Faculty of Agriculture, Sriwijaya University, Inderalaya Campus Jln Palembang-Prabumulih Km 32, Palembang, Indonesia. Tel/Fax: +62 711 580469. E-mail: momon_unsri@yahoo.co.id

[†]Détermination de la date de plantation de pastèques en agriculture sous nappe phréatique peu profonde des plaines de marées.

Contract/grant sponsor: Hibah Bersaing (Grand competition) research grant of Ministry of Research, Technology and Higher Education of Indonesia Republic; contract/grant number: 31/E3/2016

Contract/grant sponsor: Ministry of Research, Technology and Higher Education of the Republic of Indonesia; contract/grant number:

INTRODUCTION

Tidal lowlands are low-lying, flat coastal plains, with a micro relief of not more than 1.00 m (Schultz *et al.*, 2013). Depending on the relative position of the land to the tide, the following classification has been made by the Directorate of Swamps (1984). There are four hydro-topographic classes:

- Class A is land below low high tide. The land can always receive water from the tide during the dry and wet seasons;
- Class B is land below high tide, but above land in Class A. The land can only receive tide water during the wet season;
- Class C is land not higher than 0.50 m above the highest tide. The water table is lower than 0.50 m-surface. Water supply from high tidal water cannot be provided because it is below the surface. Class C land is therefore highly dependent on rainfall;
- Class D is land above class C (upland soils). The land never receives water from the tide and is suitable for upland crops or plantations. The water table is deeper than 0.50 m-surface.

In tidal lowland areas tertiary canals have the function of collecting and discharging excess water during the wet season and if possible to supply fresh water during the dry season. When stop logs or flap gates are installed in these canals improved water management with a focus on these functions can be established (Suprianto *et al.*, 2010; Imanudin *et al.*, 2016).

Agriculture in tidal lowland areas of Indonesia has faced the problem of land use conversion from food crops to plantation crops. One way to control land use conversion in tidal lowland agriculture is to increase planting intensity. Studies by Imanudin *et al.* (2010, 2011) in tidal lowland in the Telang II area showed that the land had great potential for two or even three crops per year (Schultz *et al.*, 2015). The change of planting pattern from one into two times of planting can bring an equal income compared to that from oil palm. The change of planting pattern from *rice-fallow* into *rice-corn* and *rice-corn-corn* was more profitable (Imanudin and Bakri, 2014). Crop diversification with watermelon provides new prospects for farmers because it can result in a higher income compared to that of an oil palm plantation. The profit gained from watermelon cultivation with duration of 70–90 days can be as high as 30 million Rp/ha.¹ According to Gunawan (2014), if watermelon production is 11 t and the price is 3000 Rp kg⁻¹, then the net profit received by the farmers is about 18.5 million Rp.

Watermelon cultivation is therefore one of the appropriate alternatives in order to increase farmers' income from tidal lowland agriculture. However, information about the

minimum depth of the groundwater table for crop planting is very important for farmers to determine the planting date. Therefore, research on crop adaptation to wet soil conditions is required to enable farmers to decide on the best planting time under various conditions within the existing land classification. This paper describes the experimental research on watermelon under greenhouse control conditions and validated by using groundwater data that have been recorded in the Telang area, South Sumatra.

BACKGROUND

The value of the benefit/cost (B/C) ratio is highly dependent on the cost of agricultural inputs. Research in Iran showed that there the B/C ratio of watermelon plants was 2.6 (Namdari, 2011). Adeboye *et al.* (2011) reported that the B/C ratios in Nigeria are lower at only 2.3 because of the costs of transportation and fertilizer. At present the largest watermelon-producing country is China. However, Indonesia is among the top 20 countries exporting the fruit. A watermelon cultivation effort in the lowlands is considered to be useful as an option for farm enterprise diversification.

Wang *et al.* (2017) reported that irrigation is needed for crop cultivation if rainfall during the growing season is less than 120 mm. They stated that 68 mm irrigation water will increase production by 46%. They also stated that irrigation water coupled with mulch can increase production by 11.4 t ha⁻¹ compared to cultivation without mulch.

Evapotranspiration is strongly influenced by changes in groundwater depth. The closer the groundwater is to the soil surface, the higher the evapotranspiration. In lowland areas plant growth is highly dependent on water supply from capillary water movement. Results of a study by Singh *et al.* (2006) on *Typic Haplustalf* soil with a clay content of 45% showed capillary water movement of 18.7 mm day⁻¹ at a groundwater depth of 0.90 m-surface. The groundwater contribution decreased to 10.7 mm day⁻¹ at a groundwater depth of 1.20 m-surface. Results of a study by Singh *et al.* (2006) showed that groundwater contribution was 10.7 mm day⁻¹ if the groundwater table depth was 1.20 m-surface for dominated clay textural soil. On the other hand, capillary water contribution was 4.8 mm day⁻¹ if the groundwater table was at 0.74 m-surface and 2.5 mm/day if it was at 1.00 m-surface for sandy loam soil (Udom *et al.*, 2013). The groundwater contribution in sandy clay soil at a groundwater depth of 0.74 m-surface was 4.76 mm day⁻¹ and 2.45 mm day⁻¹ at a groundwater depth of 1.00 m-surface (Udom *et al.*, 2013). These data showed that groundwater movement at 1.00–1.20 m-surface is sufficient to fulfil the evapotranspiration requirement. However, the crop will require additional irrigation water if the

groundwater is located deeper than 2.00 m-surface. Therefore, the water retention function to keep the groundwater table at 1.00–1.30 m-surface is very important if farmers cultivate crops during the dry season. Karimova *et al.* (2014) reported for the case of loamy clay soil that a groundwater table at 1.50 m-surface resulted in evapotranspiration of 47% and at 3 m-surface only of 23%. This finding showed that the crop required irrigation for maximum evapotranspiration at those positions. As reported by Pelletier *et al.* (2015), at a groundwater depth of 0.60 m-surface almost 70–80% irrigation water can be saved. According to Agele *et al.* (2015), variation in the contribution of capillary water to groundwater storage is a function of the groundwater depth. A high capillary rise is obtained when the depth of the groundwater table is within the threshold of the capillary rise during the harvesting period and evapotranspiration can be entirely sourced from groundwater. The simulations conducted by Gao *et al.* (2017) suggest that at a groundwater depth of 1.00 m-surface 40% of the evapotranspiration from plants is supplied from capillary water. Reported by Saraiva *et al.*, (2018) to reduce water requirements in watermelon cultivation, mulch technology was successfully applied. Through that technology the production of watermelon reaches 73.66 Mg ha⁻¹ with an irrigation water level of 314 mm.

The ideal conditions for crop growth are an available water condition between field capacity and permanent wilting point. Crop growth at the initial phase will be disturbed if the soil moisture is at 75% of exhausted available water, whereas optimum crop growth is at 50% of exhausted available water (Modi and Zulu, 2012). A crop which is flooded during a short time will experience hypoxia (lack of O₂). Hypoxia usually occurs if parts of the crop roots are flooded (the crown part is not flooded) or when the crop is flooded for a long time but crop roots are located near the soil surface. If all parts of a crop are flooded, then the roots are located deeper in the soil and experience flooding for a longer time so that the crop is in anoxia condition (an environment without O₂). The anoxia condition occurs 6–8 h after flooding because O₂ is suppressed by water and the rest of the O₂ is utilized by microorganisms. The left-over O₂ content within the soil during flooded conditions with a crop is used up faster because the O₂ diffusion rate within a wet soil is 10 000 times slower than that in air (Amstrong, 1979). Conditions of hypoxia or anoxia not only prevent N fixation, but also distribution of N and other minerals, which in turn impede root growth and nodulation. Leaves will experience yellowing followed by leaf fall due to insufficient transportation of N and minerals into the crown part. Scott and Fisher (1989) reported that flooding effects were indicated by leaf yellowing, leaf fall at the lowest joint, dwarf growth and a decrease of dry matter weight and crop yield. According to Hapsari and Adie (2010), results of their study on

soybeans showed that yield losses at the vegetative phase were generally lower than during the reproductive phase, having values of 17–43 and 50–56% respectively. The magnitude of yield losses was dependent on crop variety, crop growth phase, flooding period, soil texture and the existence of crop weeds and diseases. According to Pasaribu *et al.* (2013), under tropical climatic conditions in *ultisol* soil the crop water requirement for watermelon is 2.8 mm day⁻¹ for the initial growth phase, 6.2 mm day⁻¹ for the middle growth phase and 4.4 mm day⁻¹ for the final growth phase, respectively.

Tidal lowland areas with a shallow groundwater table have a high potential for watermelon cultivation. The groundwater contribution through capillary flow is sufficient to provide the crop water requirement (Imanudin and Bakri, 2014). This condition has the advantage that irrigation is not needed, resulting in cost saving. Imanudin *et al.* (2010) stated that controlled drainage is the best option to maintain preferred water levels in lowland areas. Farmers would have to install hydraulic structures in tertiary canals in order to control the open water table at levels in such a way that optimal growth conditions for the crops are created. However, if planting is delayed at flowering stage during the dry season and the groundwater depth exceeds 1.50 m-surface, irrigation by pumping needs to be provided (Singh *et al.*, 2006). In addition, a long period of flooding results in abiotic stress of the crop, which affects the sprout growth rate, seed development and subsequently affects crop growth and development, especially during the initial growth period (Dat *et al.*, 2000). The food crop is capable of tolerating a water content level which exceeds the field capacity by 25% (Prawoto *et al.*, 2005).

In the Telang area during the November–January period the water is generally above the soil surface with a 10–20 cm inundation height. In this period rice is planted (first season), starting in February the water level is gradually lowered to a depth of 20–30 cm-surface and the rice reaches the harvest period (Imanudin and Bakri, 2014). According to Bakri *et al.* (2014) the groundwater levels after rice harvesting are still high enough for the cultivation of a second crop. If there are tertiary gates then they will be operated to achieve maximum drainage. In the March–April period, groundwater levels in tidal lowlands that have a Class B hydro-topography are in the range of 20–30 cm-surface. Thus the soil moisture in the root zone is still too wet for a second crop like corn. However watermelon plants could be planted by the end of April.

Based on the above discussion, applied research was considered to be required to determine watermelon crop response at the initial phase to shallow groundwater table conditions.

MATERIALS AND METHODS

The research was conducted from March to April 2016 in the greenhouse at the Agroecotechnology Department, Faculty of Agriculture, Sriwijaya University. Data of daily groundwater level from secondary data and direct observations were used to analyse the planting time. The secondary data were obtained in tidal lowland pilot project areas in the Telang I area. The direct observations were done on a tertiary plot in the Telang II area in 2015 (Imanudin *et al.*, 2010).

Materials and equipment used in this study were soil, having a sandy loam texture, watermelon seeds, water and aqua bottles. Equipment for groundwater level control was obtained by using the continuous flow system (Figure 1) in which the groundwater level is kept in equilibrium with that in a reservoir using the principle of connected vessels. The experimental application of groundwater depth to supply irrigation by capillary rise is presented in Figure 2. Treatments consisted of maintaining groundwater depth at 5, 10 and 15 cm-surface. In order to maintain a constant groundwater level, the water height in the column was kept constant, which required daily observation. Crop growth was determined by measuring height as well as number of leaves at 2 weeks after planting. Root length and number of leaves for each treatment were also observed at the end of the experiment.

To determine the best planting in the field, daily groundwater data were analysed by comparing the greenhouse experimental result of watermelon growth response to shallow groundwater tables in the initial phase. Data analysis of the daily groundwater level was carried out to



Figure 2. Experimental application of groundwater depth to supply irrigation water to the crop [Colour figure can be viewed at wileyonlinelibrary.com]

determine planting potential in the field. The data of daily groundwater level were also compared with rainfall data in 2015 that were obtained from Kenten Climatologic Station in Palembang.

RESULTS AND DISCUSSION

Study of planting potential in tidal lowland area

Watermelon cultivation in tidal lowland areas is highly dependent on the season. Planting in the wet season cannot be implemented due to the very high groundwater level as a result of rainfall. Figure 3 shows groundwater level observations in the Telang I area in 2009, which indicate that the groundwater was too saturated up to May for cultivation of crops, except for rice. Planting could be done by the end

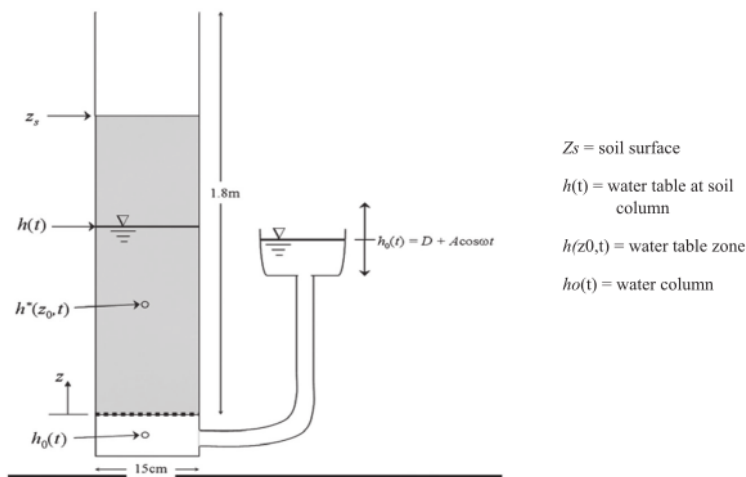


Figure 1. Experimental set-up of groundwater contribution to crop water requirement (Udom *et al.*, 2013)

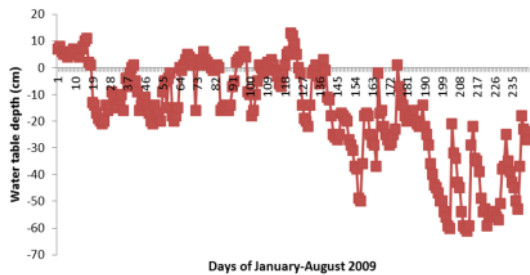


Figure 3. Groundwater level during the January–August period in normal conditions (Imanudin *et al.*, 2010) [Colour figure can be viewed at wileyonlinelibrary.com]

of May or early June with as a consequence that the crops frequently experienced dryness during the generative phase in August.

When structures in the tertiary canals have been installed, then according to Bakri *et al.* (2015) the water management objective for crop cultivation in the period June–September will be water retention within the tertiary canals. If high fresh tidal water can still enter the tertiary canal, then a proper water gate is a stop log with a retention level of 0.50 m from the bottom level of the canal. The stop log height would have to be regulated such that high tidal water can enter the canal and water is held at a minimum of 0.50 m-surface during the low tide period. If an automatic fibre flap gate has been installed, then the gate position during the dry season needs to be before the culvert at the downstream side of the tertiary canal so that high tidal water can enter the canal and the gate will automatically close during the low tide period. However, such gates can easily be damaged and cannot be repaired by the farmers (Imanudin *et al.*, 2016).

Although in November high tidal water can be blocked to prevent it from getting on to the land, high rainfall intensity coupled with insufficient duration of low tide for discharge will result in full canals and it will be difficult to achieve groundwater drawdown. Figure 4 shows data of groundwater-level fluctuation from February to March on

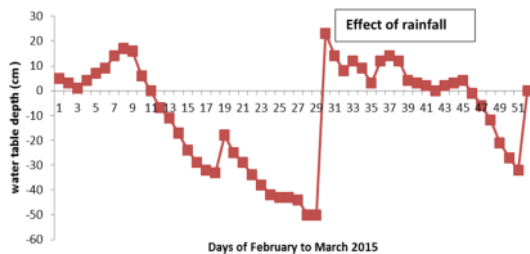


Figure 4. Groundwater level in February and March 2015 under dry conditions [Colour figure can be viewed at wileyonlinelibrary.com]

Class B land in 2015. The drastic upward movement of the groundwater level was due to rainfall. At that time there were no structures and the tide water could enter the tertiary block, so the land had more excess water and a higher groundwater level or inundation during the wet season. The groundwater level dropped continuously in the case of no rainfall. In addition to the structures in the tertiary canals, in the concerned area a micro water management system was installed. The system consists of small canals (called *micro channels*) at 8 m spacing, having a depth of 20 cm. The data in Figure 4 show that the micro water management system was relatively effective in lowering the groundwater level. However, farmers could not do planting in early March because the average depth of the groundwater level was less than 10 cm-surface. Figure 3 also shows that there was flooding for 10–12 days. Direct planting of watermelon seeds could not be done in these conditions and could only be done on the 14th day or in the middle of March.

Planting would have to be done at the end of the wet season in April or as a result of the El Nino effect in 2015 even in March due to the dry conditions. Crop adaptation to dry conditions could start planting in the early growth period in the wet season. The decision to move the planting time forward was made to prevent water deficiency during the generative growth phase. Dry climate conditions in August–September cause moisture content in the root zone to be close to the permanent wilting point due to the decrease of the capillary rise, because the groundwater dropped deeper than 1.50 m-surface. Rainfall started to decrease at the beginning of July and the maximum decrease occurred in the period August–October (Figure 5).

Cropping intensity on tidal lowland reclamation areas can be done two or even three times as an impact of land and water management. Farmers can grow rice-rice-corn in a year. In addition, intensive farming can decrease forest and land fire indirectly if the land is properly managed and utilized (Imanudin and Susanto, 2015).

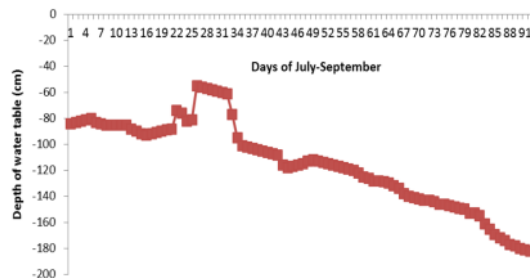


Figure 5. Groundwater level during the dry season of 2015 on Class B land [Colour figure can be viewed at wileyonlinelibrary.com]

Experiment of watermelon planting under shallow groundwater table conditions

The basic objective of the experiment was to analyse the possibilities for earlier planting of watermelon during the wet season in March or early April. For that reason the experiment was carried out in a greenhouse to identify the crop response to shallow groundwater table conditions.

Crop testing results for two groundwater conditions mentioned above showed that the crop can still grow at a groundwater depth of 5 cm-surface with a less than optimal growth level. Watermelon had already grown on the fourth day with a groundwater depth of 10 cm-surface, but it had not grown with a groundwater depth of 5 cm-surface. Plant height was 5.6 cm and the leaves were still bud (closed) with uplifted seed skin on the sixth day with a groundwater depth of 10 cm-surface, but prospective stem was just emerging for a groundwater depth of 10 cm-surface. Plant height was 12.1 cm with three leaves on the 17th day with a groundwater depth of 10 cm-surface, whereas it was 8.2 cm with three leaves on the 17th day with a groundwater depth of 5 cm-surface. Average growth rate of the crop until the 17th day for a groundwater depth of 10 cm-surface was 0.71 cm day^{-1} and its value was 0.48 cm day^{-1} for a groundwater depth of 5 cm-surface. A crop growth description is given in Figure 6.

The laboratory experiment was stopped 20 days after planting because it was estimated that the groundwater had dropped more than 20 cm-surface in field conditions. This period was at the end of the wet season (April) when farmers did their planting at the end of March. The plants can be more adaptive to environment conditions during this period. Observations on the 20th day were conducted on watermelon treated with a groundwater table at 15 cm-surface. Plant height was 15.2 cm and it had four leaves. The plants had more leaves with this treatment than those of the 10 and 5 cm-surface treatments.

Average plant height was 0.76 cm for the 15 cm-surface treatment. This value was relatively similar to the result obtained from that of 10 cm-surface. Therefore, watermelon cultivation can be started if field conditions show a groundwater level of 10 cm-surface. A contrasting condition was found with the 5 cm-surface treatment, which showed a cessation of the growth of root elongation. The root length was only 3.1 cm at 20 days after planting, which indicated that root growth avoids a high groundwater table.

Potential time of planting on Class C land

The results from greenhouse experiments also showed that watermelon can be planted under conditions of a shallow groundwater table between 10 and 15 cm-surface, if watermelon is cultivated on Class C land. The water in the tertiary canals can maintain the groundwater table. In tidal lowland areas, then, the planting time can be accelerated to the end of February or planting can be directly conducted after rice harvesting. Planting can be done by using the hole system in which after clearance of rice straw a micro canal is dug every 6–8 m, using a single plough. The planting needs to be done quickly in order to prevent drying out. If planting is done at the end of February or in early March harvesting can be expected by the end of May. The generative phase would be in May. Observation results of the groundwater-level fluctuation showed that planting could be done in early March when the groundwater level was 20–30 cm-surface (Land and Water Management Tidal Lowlands (LWMTL), 2006). Depending on the groundwater level, planting could be done in February, but it is better to do it in early March, because in February farmers are busy with first-season rice harvesting. Water retention in canals needs to be provided in order to maintain a groundwater table close to the root zone.



Figure 6. Visualization of watermelon response to shallow groundwater table conditions (15th day) [Colour figure can be viewed at wileyonlinelibrary.com]

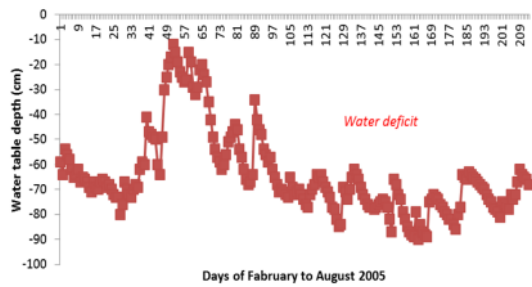


Figure 7. Groundwater table fluctuation in a Class C tidal lowland area (LWMTL, 2006) [Colour figure can be viewed at wileyonlinelibrary.com]

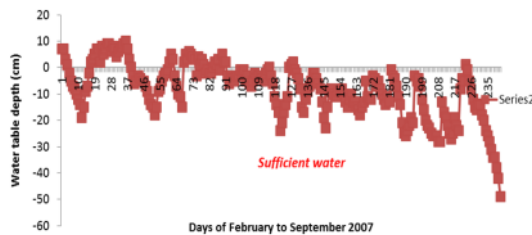


Figure 8. Groundwater fluctuation on Class B land (Imanudin *et al.*, 2010) [Colour figure can be viewed at wileyonlinelibrary.com]

The flowering phase in May poses a high risk, because the groundwater table frequently drops to 0.90–1.00 m-surface (Figure 7). Therefore, irrigation would be needed in this phase and be applied twice. Irrigation by pumps would be helpful to pump water from tertiary canals using furrow irrigation. High soil porosity in Class C land may mean that capillary water is not sufficiently available to fulfil the evapotranspiration requirement if the depth of the groundwater table is lower than 1.00 m-surface. This showed that the critical level of the groundwater table is 1.00 m-surface for Class C land, whereas it is at 1.50 m-surface for Class B land, when dominated by clay soil. Analysis results of groundwater table fluctuation showed that watermelon cultivation can be carried on without irrigation on Class B land (Figure 8).

CONCLUSIONS

The following conclusions can be drawn from this study:

- Watermelon has the potential to be developed in tidal lowland areas because it is relatively tolerant to shallow groundwater depth in the initial growth phase. The crop was able to grow at a groundwater depth of 5 cm-surface. Optimum growth was achieved at a groundwater depth of 15 cm-surface. However, field application showed that watermelon can be planted at

a groundwater depth of 10 cm-surface. Results of the field study showed that a groundwater depth for Class B–C land had reached 15 cm-surface in March–April. Accelerated planting at the end of March is important in order to prevent dryness during the generative phase, when irrigation by gravity cannot be applied;

- crop adaptation to the groundwater table is dependent on planting time and land category. The crop could be planted in June and be harvested in September without irrigation in Class A and B land. Capillary water on these land classes was sufficient to fulfil the evapotranspiration requirement. However, an earlier planting time in March and harvesting in May–June needs to be conducted on Class C land, because this land had a high soil porosity. Capillary water during the dry season in this soil could not fulfil the evapotranspiration requirement. In June–September the groundwater could reach more than 1.20 m-surface;
- the tertiary canal needs to be equipped with a stop log or flap gate to control the preferred groundwater table. The main option for Class A and B land was drainage, whereas for Class C land it was water retention.

ACKNOWLEDGEMENT

This research was carried out with funding from a ³research grant from the Ministry of Research, Technology and Higher Education of the Republic of Indonesia.

REFERENCES

- Adeboye IB, Olajide-Taiwo FB, Adebisi-Adelani O, Usman JM, Badmus MA. 2011. Economic analysis of watermelon based production system Oyo State Nigeria. *ARPN Journal of Agricultural and Biological Science* 6(7): 53–59.
- Agele SO, Anifowose AY, Agbona IA. 2015. Irrigation scheduling effects on components of water balance and performance of dry season Fadama-grown pepper in an inland-valley ecosystem in a humid tropical environment. *International Journal of Plant & Soil Science* 4(2): 171–184 Article no. IJPSS.2015.018.
- Armstrong W. 1979. Aeration in higher plants. *Advance of Botanical Research* 7: 275–332.
- Bakri B, Imanudin M, Masreah S. 2014. The study of subsurface drainage for com cultivation on tidal lowland Telang II South Sumatra. In *Proceedings of the National Seminar of Suboptimal Land*, Palembang, 26–27 September; 272–280.
- Bakri B, Imanudin MS, Bemas SM. 2015. Water retention option of drainage system for dry season cultivation at tidal lowland area. *Journal Agrivita* 37(3): 237–246.
- De J, Vandenaabeele S, Vranová E, Van Montagu M, Inzé D, Vanousegem F. 2000. Dual action of the active oxygen species during plant stress responses. *Cellular and Molecular Life Sciences* 57: 779–795.
- Directorate of Swamps. 1984. Department of Public Works Policy. In the Framework of Swamp Development. Discussion of the Pattern of Food

- Crop Agriculture Development in Tidal Areas/Lebak. Palembang, 30 July–2 August 1984
- Gao X, Huo Z, Xu X, Huang G, Steenhuis TS. 2017. *Modeling Contribution of Shallow Groundwater to Evapotranspiration and Yield of Maize in an Arid Area*, Scientific Report. <https://www.nature.com/articles/srep43122.pdf>
- Gunawan I. 2014. Benefit and cost analysis of watermelon (*Citrullus vulgaris*) in Rambah Muda village Rambah Hilir sub district at Rokan Hulu. *Journal Sungkai* 2(1 February): 52–63.
- Hapsari TR, Adie MM. 2010. The opportunities for assembling and development of soybean tolerance of flooding. *Journal Agricultural Research and Development* 29(2): 2010.
- Imanudin MS, Armanto ME, Susanto RH, Bemas SM. 2010. Water table fluctuation in tidal lowland for developing agricultural water management strategies. *Journal of Tropical Soils* 15(3): 277–282 ISSN 0852-257X. Open access. Web-link: <http://journal.unila.ac.id/index.php/tropicalsoil> DOI: <https://doi.org/10.5400/jts.2010.15.3.277>.
- Imanudin MS, Armanto ME, Susanto RH. 2011. Developing seasonal operation for water table management in tidal lowland reclamation areas at South Sumatra, Indonesia. *Journal of Tropical Soils*, Unila 16(3): 233–244 ISSN 0852-257X. Open access. Web-link: <http://journal.unila.ac.id/index.php/tropicalsoil> DOI: <https://doi.org/10.5400/jts.2011.16.3.233>.
- Imanudin MS, Bakri B. 2014. The study of corn cultivation under rainy season in tidal lowland reclamations areas to achieve 300% index cropping system. In *Proceedings National Seminar Indonesian National Committee of Irrigation and Drainage*, 16–17 May, Palembang, South Sumatra, Indonesia; 126–134.
- Imanudin MS, Susanto RH. 2015. Intensive agriculture of peat land areas to reduce carbon emission and fire prevention (a case study in Tanjung Jabung Timur tidal lowland reclamation Jambi). In *Proceedings of the 1st Young Scientist International Conference of Water Resources Development and Environmental Protection*, Malang, Indonesia, 5–7 June.
- Imanudin MS, Susanto RH, Budianta D. 2016. El-Nino effect on water management objective in tidal lowland reclamation areas (Adaptation Model for Corn). In *Proceedings 2nd World Irrigation Forum*, 6–8 November, Chiang Mai-Thailand. ISBN 978-81-89610-22-7.
- Kahlown MA, Ashraf M, Zia-ul-Haq. 2005. Effect of shallow groundwater table on crop after requirement and crop yield. *Agricultural Water Management* 76(1): 24–35.
- Karimova AKH, Simunek BJ, Hanjrac MA, Avliyakov M, Forkutsa I. 2014. Effects of the shallow water table on water use of winter wheat and ecosystem health: implications for unlocking the potential of groundwater in the Fergana Valley (Central Asia). *Agricultural Water Management* 131: 57–69.
- Land and Water Management Tidal Lowlands (LWMTL). 2006. Final report of Land and Water Management on Tidal Lowlands Project in Banyuasin District South Sumatra Province, June 2004–August 2006. Utrecht, the Netherlands.
- Modi AT, Zulu NS. 2012. Watermelon landrace seedling establishment and field performance in response to differing water regimes. *African Journal of Agricultural Research* 7(45): 6016–6021.
- Namdari M. 2011. Energy use and cost analysis of watermelon production under different farming technologies in Iran. *International Journal of Environmental Sciences* 6(1): 2011.
- Pasaribu IS, Sumono S, Daulay B, Susanto E. 2013. The study of irrigation efficiency of tricle irrigation system for watermelon (*Citrullus vulgaris* S.) in Ultisol soil. *Journal Food Technology and Science. Food Engineering and Agriculture* 1(2): 2013.
- Pelletier V, Gallichand J, Gumiere S, Pepin S, Caron J. 2015. Water table control for increasing yield and saving water in cranberry production. *Sustainability* 7: 10602–10619. <https://doi.org/10.3390/su70810602>.
- Prawoto A, Zainunnuroni M, Slameto. 2005. Seed response of some cocoa clones in nursery to high soil humidity level. *Journal Pelita of Plantation* 21(2): 90–105.
- Schultz B, Hayde L, Park S-H, Tanaka K. 2013. Global Inventory of closed-off tidal basins and developments after the closure. *Irrigation and Drainage* 62 October, Supplementary Issue: 107–123.
- Schultz B, Susanto RH, Suryadi FX, Waskito AS. 2015. Analysis of water management in reclaimed tidal lowlands of Indonesia. Experiences in the Telang I Scheme, Musi Delta, South Sumatra. In Kop J, Ravensteijn W, Kop K (eds). *Irrigation Revisited. An Anthology of Indonesian–Dutch Co-operation 1965–2014*. Eburon: Delft, the Netherlands/Jakarta, Indonesia.
- Scott BJ, Fisher JA. 1989. Selection of genotypes tolerant of soil acidity. In Robson AD (ed). *Soil Acidity and Plant Growth*. Academic Press: Sydney; p 167–204.
- Singh R, Kundu DK, Tripathi VK. 2006. Contribution of upward flux from shallow ground water table to crop water use in major soil groups of Orissa. *Journal Agriculture Physics* 6(1): 1–6.
- Suprianto H, Ravaie E, Irianto SG, Susanto RH, Schultz B, Suryadi FX, van den Eelaart A. 2010. Land and water management tidal lowlands. Experiences in Telang and Saleh, South Sumatra. *Irrigation and Drainage* 59(3): 317–335.
- Udom IJ, Ugwuishiwu BO, Urama RI. 2013. Groundwater contribution to crop water requirement groundwater contribution to crop water requirement of waterleaf (*talinum triangulare*) in oxisols of waterleaf (*talinum triangulare*) in oxisols of south- of south-south nigeria south nigeria. *Nigerian Journal of Technology* 32: 424–432.
- Wang J, Huang GH, Li JS, Zheng JH, Huang QZ, Liu HJ. 2017. Effect of soil moisture-based furrow irrigation scheduling on melon (*Cucumis melo* L.) yield and quality in an arid region of Northwest China. *Agriculture Water Management* 179: 167–176.

NOTE

¹Rp = Indonesian rupiah, 1 Rp = 0.000077 US\$, price level 2016.

Jurnal Irigasi

ORIGINALITY REPORT

5%

SIMILARITY INDEX

5%

INTERNET SOURCES

3%

PUBLICATIONS

2%

STUDENT PAPERS

PRIMARY SOURCES

1

www.infona.pl

Internet Source

2%

2

agritrop.cirad.fr

Internet Source

1%

3

scindeks.ceon.rs

Internet Source

1%

4

www.tandfonline.com

Internet Source

1%

Exclude quotes On

Exclude bibliography On

Exclude matches < 1%