

3. matecconf_sicest2017_02015.pdf

Combustion of producer gas from gasification of south Sumatera lignite coal using CFD simulation

Fajri Vidian^{1*}, Novia², Andy Suryatra¹

¹Mechanical Engineering Department, Faculty of Engineering, Universitas Sriwijaya, 30662 Inderalaya, Indonesia.

²Chemical Engineering Department, Faculty of Engineering, Universitas Sriwijaya, 30662 Inderalaya, Indonesia.

Abstract. The production of gasses from lignite coal gasification is one of alternative fuel for the boiler or gas turbine. The prediction of temperature distribution inside the burner is important for the application and optimization of the producer gas. This research aims to provide the information about the influence of excess air on the temperature distribution and combustion product in the non-premixed burner. The process was carried out using producer gas from lignite coal gasification of BA 59 was produced by the updraft gasifier which is located on Energy Conversion Laboratory Mechanical Engineering Department Universitas Sriwijaya. The excess air used in the combustion process were respectively 10%, 30% and 50%. CFD Simulations was performed in this work using two-dimensional model of the burner. The result of the simulation showed an increase of excess air, a reduction in the gas burner temperature and the composition of gas (carbon dioxide, nitric oxide and water vapor).

1 Introduction

The decreasing of crude oil as the energy sources has been followed by the increasing of the energy needs, so the needs of an alternative energy source to replace the crude oil is very crucial. Coal is one of the alternative energy to replace the crude oil. The utilization of coal in the direct combustion method will cause a problem in the pollution and a low efficiency of energy conversion. Gasification is one of the technology that can convert coal to be combustible gas with the low pollution [1-2] and high of the efficiency [2-3]. Indonesia is one of the largest coal-producing country in the world that have coal reserves about 3% from the world coal reserve [4] whereas about 57% of the reserve is the lignite coal [5]. South Sumatera is one of the largest coal suppliers in Indonesia. One of the coal product that not utilized maximally is the lignite coal (South Sumatera lignite coal called as BA 59).

The combustible gas produced from its gasification can be used for application on boiler, gas turbine, and dryer [6]. Its for the coal application, it needs an appropriate gas burner to reach the temperature distribution as expected. The method can be used to predict the temperature distribution inside the gas burner is simulation using computational fluid dynamics. Several simulations has been done by several researchers. Previous authors [7] has simulated the combustion of producer gas from the biomass gasification using computational fluid dynamics (CFD). The result of study shows the highest temperature is about 1367 °C. Other researchers [8] has simulated the combustion of producer gas from biomass gasification,

the result shows the highest temperature in the combustion chamber about 1300 °K to 1700 °K. The combustion of producer gas in gas burner for applying in gas turbine is reported by [9]. The result of the work showed that the highest temperature of combustion was about 1500 °K [9].

Another work have performed by [10], they simulated the combustion of producer gas from gasification of wood chip and turkey feather. The result showed that the highest temperature can reach to 2000 °K and 1500 °K [10]. The combustion of producer gas from coconut shell gasification at swirl gas burner has simulated by [11], the result shows the application of swirl will increase the combustion temperature. The highest temperature reached about 1173°K [11]. The result of the researchers showed the combustion temperature of the producer gas is effected by the fuel of the gasification process and the gas burner design with the temperature range of 1200 °K to 2000 °K. However, none of the previous studies used the application of CFD the production of gasses from lignite coal gasification. The objective of this research is to obtain the effect of excess air on the temperature distribution and the combustion products in the non-premixed burner using CFD simulation.

2 Producer gas composition

Producer gas used in the simulation is the BA 59 that produced from coal gasification from South Sumatera, Indonesia using updraft gasifier at Energy Conversion Laboratory Mechanical Engineering Department,

*Corresponding author: fajri.vidian@unsri.ac.id


Sriwijaya University. The gas composition shows in Table 1.

Table 1. Producer gas composition

Species	%(Vol)
CO	29.54
H ₂	12.07
CH ₄	3.4
CO ₂	8.11
O ₂	1.3
N ₂	45.58

3 Governing equation

Combustion process of the producer gas at the stoichiometry condition define by the equation below



Combustion of producer gas in gas burner involved fluid flow and chemical reaction. Mass and momentum equation are used to drive the fluid flow.

Mass Conservation Equation

$$\frac{\partial \rho}{\partial t} + \nabla \cdot (\rho \vec{v}) = S_m \quad (2)$$

Momentum Conservation Equation

$$\frac{\partial}{\partial t} (\rho \vec{v}) + \nabla (\rho \vec{v} \vec{v}) = -\nabla p + \nabla \bar{\tau} + \rho \bar{g} + \bar{F} \quad (3)$$

The distribution temperature inside gas burner is solved by energy conservation equation.

$$\frac{\partial}{\partial t} (\rho E) + \nabla (\vec{v} (\rho E + p)) = \nabla (k_{eff} \nabla T - \sum_j h_j \vec{J}_j + (\bar{\tau}_{eff} \vec{v})) + S_h \quad (4)$$

Species movement in the gas burner is solved using the species transport equation

$$\frac{\partial}{\partial t} (\rho Y_i) + \nabla (\rho \vec{v} Y_i) = -\nabla \cdot \vec{J}_i + R_i + S_i \quad (5)$$

The combustion process depend on the turbulence. K-Epsilon Standard equation is used to solve turbulence process during combustion.

$$\frac{\partial}{\partial t} (\rho k) + \frac{\partial}{\partial x_i} (\rho k u_i) = \frac{\partial}{\partial x_j} \left[\left(\mu + \frac{\mu_t}{\sigma_k} \right) \frac{\partial k}{\partial x_j} \right] + G_b + G_k - \rho \epsilon - Y_M + S_k \quad (6)$$




The interaction between chemical reaction and turbulence in side of the gas burner are solved using the model has developed by Magnussen and Hjertager. The reaction rate will be produced by the smallest value between equation 7 and 8.

$$R_{i,r} = v'_{i,r} M_{w,i} A \rho \frac{\epsilon}{k} \min_R \left(\frac{Y_R}{v'_{r,r} M_{w,r}} \right) \quad (7)$$





$$R_{i,r} = v'_{i,r} M_{w,r} A B \rho \frac{\epsilon}{k} \frac{\sum_P Y_P}{\sum_j v'_{j,r} M_{w,j}} \quad (8)$$

The mechanism of NOx production in side gas burner are modeled on thermal and prompt mechanism.

Thermal NOx mechanism



Prompt NOx mechanism



Thermal and Prompt NOx transport are derived by equation below.

$$\frac{\partial}{\partial t} (\rho Y_{NO}) + \nabla \cdot (\rho \vec{v} Y_{NO}) = \nabla \cdot (\rho D \nabla Y_{NO}) + S_{NO} \quad (16)$$

4 CFD Modeling

The combustion process was conducted in non premixed gas burner with the diameter of 45 cm and length of 180 cm [12]. The nozzle for injecting the producer gas diameter of 1 cm [12]. The schematic of the gas is presented burner in Fig 1.

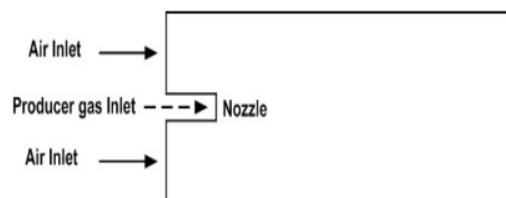


Fig.1. The scheme of gas burner

The simulation process was done in 2D of gas burner using ANSYS Fluent 16. The gas burner for domain of the calculation must be mesh to solve all the equation. The equations were solved using finite volume method. The construction of meshing are showed in Fig 2 and Fig 3.

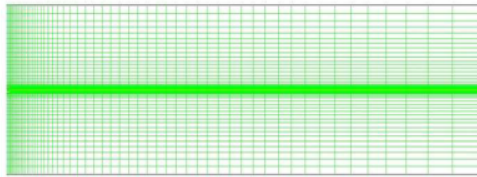


Fig.2. Mesh of the gas burner

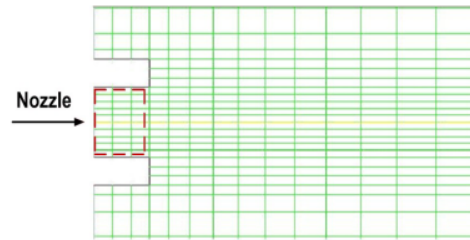


Fig.3. Mesh of the nozzle

The boundary condition for the simulation is presented in Table 2.

Table 2. Boundary Condition of The Simulation

Parameter	Condition	Quantity
Velocity of Producer gas	Excess air of 0%;10%;30%;50%	80 m/s
Velocity of air	Excess of air 0%	0.052 m/s
Velocity of air	Excess of air 10%	0.057 m/s
Velocity of air	Excess of air 30%	0,067 m/s
Velocity of air	Excess of air 50%	0.077 m/s
Inlet temperature of producer gas	Excess air of 0%;10%;30%;50%	300 °K
Inlet temperature of air	Excess air of 0%;10%;30%;50%	300 °K

5 Result and discussion

5.1 Temperature distribution

The simulation result shows the increasing of excess air from 0 to 50% will reduce the temperature distribution in gas burner as shown in Fig 4. The increasing amount of air caused the increasing amount of nitrogen. This is due to nitrogen absorb the heat from combustion and reduce the temperature in gas burner. This result is similar with the study as reported by [13-14]. The highest temperature was about of 1910 °K. The temperature was decreased about of 100 °K for increasing of the excess air from 0% until 50 %.

In the visualization can be shown clearly the reduction of temperature distribution in the gas burner as shown in figure 5-8. The reduction zone of the yellow contour which describe the higher temperature, other wise increasing of the green zone which describe the lower temperature zone.

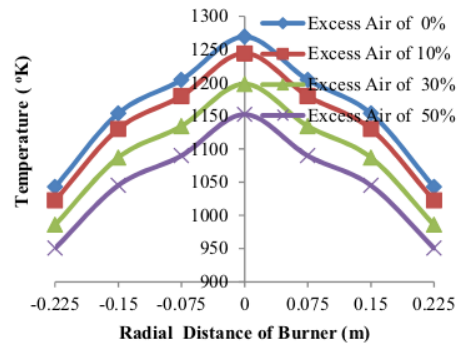


Fig. 4. Temperature distribution on middle of burner at radial distance with difference of excess air

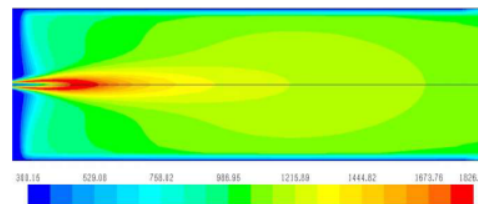


Fig.5. Temperature distribution on excess air of 0%

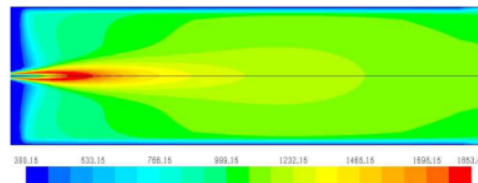


Fig.6. Temperature distribution on excess air of 10%

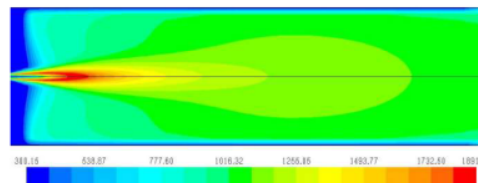


Fig.7. Temperature distribution on excess air of 30%

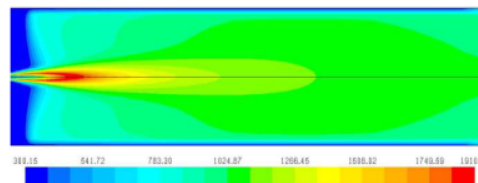


Fig.8. Temperature distribution on excess air of 50%

5.2 Carbon dioxide (CO₂) distribution

From the simulation, it showed that the excess air was increased with the decreased of the concentration distribution of CO₂ in gas burner as shown in Fig 9. This condition was occurred due to the increasing of air which is not followed by the increasing of carbon content in combustion process when the fuel flow rate is set constant. The result showed the same trend with the result has been reported by [15].

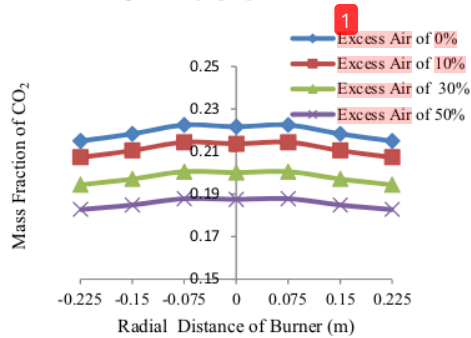


Fig. 9. Carbon dioxide distribution on middle of gas burner at radial distance with difference excess air.

The decreasing of CO₂ distribution in gas burner is shown clearly in Fig. 10-13. The area of highest temperature (brown color) shown a decrease as the increase of the excess air. The maximum of CO₂ mass fraction concentration could be reached to 28%. The increasing of excess air from 0-50% caused a decrease in mass fraction concentration about 3%.

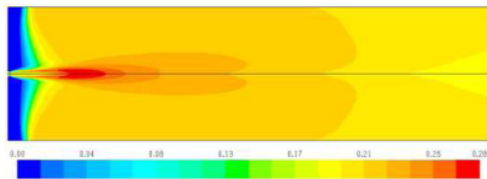


Fig.10. Carbon dioxide distribution in gas burner on excess air of 0%.

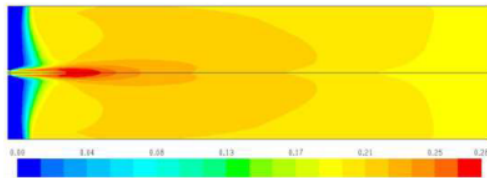


Fig.11. Carbon dioxide distribution in gas burner on excess air of 10%.

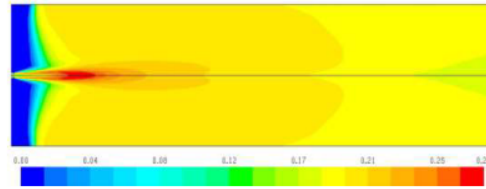


Fig.12. Carbon dioxide distribution in gas burner on excess air of 30%.

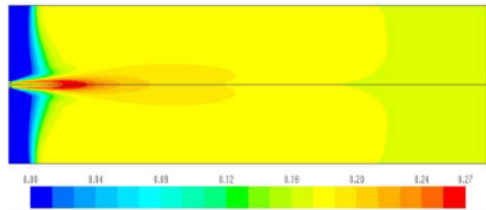


Fig.13. Carbon dioxide distribution in gas burner on excess air of 50%.

5.3 Water vapor (H₂O) distribution

The simulation result shows the increasing of excess air will decrease the distribution of H₂O in gas burner as shown in Fig 14, it is caused by the increasing of excess air was not followed by the increasing of H₂ (constant of fuel flow rate).

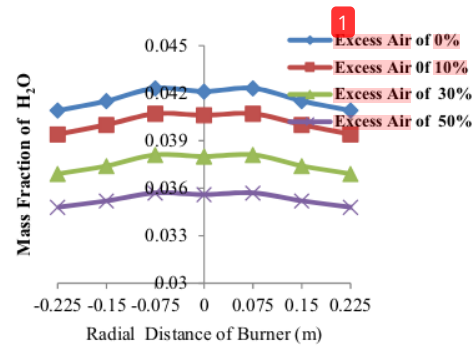


Fig. 14. Water vapor distribution on middle of gas burner at radial distance with difference excess air.

The decreasing of H₂O distribution in gas burner is shown clearly in Fig 15-18. The area of highest temperature (brown color) shown a decrease as the increase of excess air. The maximum of H₂O mass fraction concentration could be reached to 5%. The increasing of excess air from 0%-50% caused a decrease in mass fraction concentration about 0.6 %.

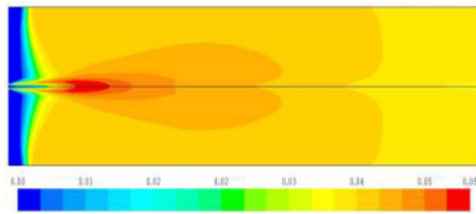


Fig. 15. Water vapor distribution in gas burner on excess air of 0%

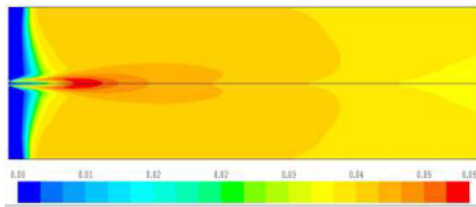


Fig. 16. Water vapor distribution in gas burner on excess air of 10%

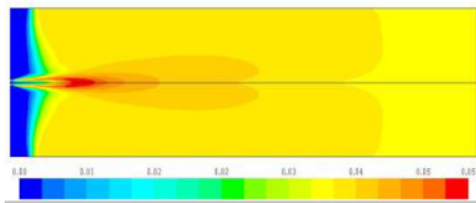


Fig. 17. Water vapor distribution in gas burner on excess air of 30%

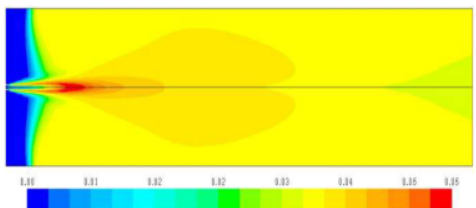


Fig. 18. Water Vapor distribution in gas burner on excess air of 50%

5.4 Nitric Oxide (NO) distribution

From the simulation process it shown an increase in excess air will caused a decrease in NO distribution in gas burner as shown in Fig 19. It is caused by the increasing of excess air which is followed by the decreasing of temperature in gas burner as shown in figure 4. The reaction 9–15 is decreased by the decreasing of temperature. This result has similarity to the simulation has reported by [16].

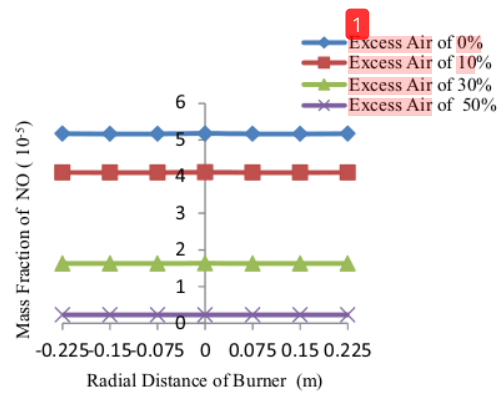


Fig. 19. Nitric Oxide distribution on middle of gas burner at radial distance with difference excess air.

The decreasing of NO distribution in gas burner shows in the visualization of contour in figure 20-23. It can be seen clearly the decreasing of the area of red contour (The highest of NO concentration) as the effect of the increasing of excess air. The maximum mass fraction of NO was about $5.37 \times 10^{-3} \%$. The increasing of excess air from 0% until 50% will decrease mass fraction concentration about of $4.9 \times 10^{-3} \%$.

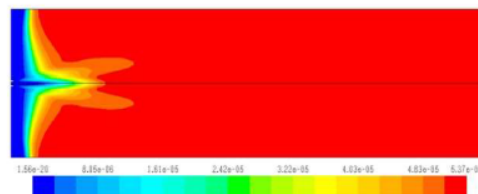


Fig. 20. Nitric oxide distribution in gas burner on excess air of 0%

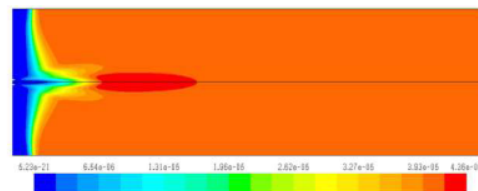


Fig. 21. Nitric oxide distribution in gas burner on excess air of 10%

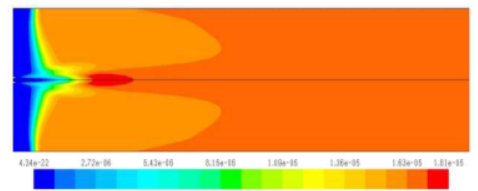


Fig. 22. Nitric oxide distribution in gas burner on excess air of 30%

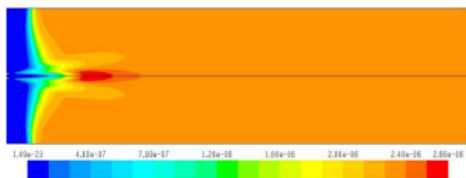


Fig. 23. Nitric oxide distribution in gas burner on excess air of 50%

6 Conclusion

From the simulation, a number of conclusions could be taken as follows:

- The highest temperature can be reached by the combustion of producer gas from gasification of BA 59 coal at non premixed gas burner is 1910 °K, The highest mass fraction concentration of CO₂ about 28%, and the highest mass fraction concentration of NO about 5.37×10^{-3} %.
- The increasing of excess air on combustion process from 0%-50% will cause the decreasing of temperature, CO₂, H₂O, and NO distribution in side gas burner

References

1. Y. Yun, S.W. Chung, Korean Journal Chemical Engineering, **24** (4), 628-632, (2007).
2. N. Crnomarkovic, B. Repic, R. Mladenovic, O. Mladenovic, M. Veljkovic, Fuel, **86**, 194-202, (2007).
3. A.G. Collot, International Journal of Coal Geology, **65**, 191-216, (2006).
4. T. Winarno, C. Drebenstedt, Mine Planning Equipment Selection, Springer International Publishing Switzerland, 1495-1494, (2014).
5. Asia Pacific Economic Corporation, Final Report, **6**, (2013).
6. E.G. Pereira, J.N. Dasilva, J.L. Oliveira, C.S. Machado, Renewable Sustainable Energy Reviews, **16**, 4753-4762, (2015).
7. P. P. Ushekwar, S. B. Desai, M.M. Wagh, N. N. Shinde, International Research Journal of Engineering and Technology, **2**(4), 1621-1624, (2015).
8. Y. Achawangkul, N. Maruyama, M. Hirota, C. Chaichana, T. Sutabutr, IOSR Journal of Engineering, **4**(2), 17-23, (2014).
9. G.S. Sharma, M.V.S.M. Krishna, D.N. Reddy, International Journal of Mechanical and Production Engineering Research and Development, **5**(2), 21-32, (2015).
10. K. Kwiatkowski, M. Dudynski, K. Bajer, Flow Turbulence Combustion, **91**, 749-772, (2013).
11. A. Surjosatyo, Y. D. Priambodho, International Journal of Mechanical Engineering, **33**, 15-31, (2011).
12. Fluent, Incorporated: Fluent 6 UDF Manual, (NH), Fluent Inc, 2001.
13. H.F. Elattar, R. Stanev, E. Specht, A. Fouda, "Computer and Fluids, **102**, 62-73, (2014).
14. R.K. Jain, IPASJ International Journal of Mechanical Engineering, Vol **2** (3), 20-28, (2014).
15. J.C. Lou, C.C. Huang, T.L. Yang, Journal of The Chinese Institute of Environmental Engineering, **9** (4), 219-231, (1999).
16. A. Soid, W. Kriaa, H. M. Al-Jabri, G.L. Palec, P. Bournot, Proceeding of World Congress on Engineering 2009, Vol II WCE, July 1-3, London UK, (2009)

3. matecconf_sicest2017_02015.pdf

ORIGINALITY REPORT

9%

SIMILARITY INDEX

PRIMARY SOURCES

- 1 Misoo Shin, Dongsoon Jang, Yongguk Lee, Yongju Kim, Eungyong Kim. "Comprehensive modeling of HFC-23 incineration in a CDM incinerator", *Journal of Material Cycles and Waste Management*, 2016
38 words — 1%
Crossref
- 2 www.researchgate.net
32 words — 1%
Internet
- 3 Seyed Ehsan Hosseini, Ghobad Bagheri, Mostafa Khaleghi, Mazlan Abdul Wahid. "Combustion of Biogas Released from Palm Oil Mill Effluent and the Effects of Hydrogen Enrichment on the Characteristics of the Biogas Flame", *Journal of Combustion*, 2015
17 words — 1%
Crossref
- 4 Lia Cundari, Nyiayu Dita Isvaringga, Yesica Maharani Arinda. "Utilization of household organic compost in zinc adsorption system", AIP Publishing, 2017
16 words — 1%
Crossref
- 5 N. A. Abaimov, E. B. Butakov, A. P. Burdukov, A. F. Ryzhkov. "Investigation of steam-air-blown two-stage entrained-flow gasification of mechanoactivated coal", AIP Publishing, 2018
15 words — 1%
Crossref

6 Chenjie Zhu, Tao Shen, Dong Liu, Jinglan Wu, Yong Chen, Linfeng Wang, Kai Guo, Hanjie Ying, Pingkai Ouyang. "Production of liquid hydrocarbon fuels with acetoin and platform molecules derived from lignocellulose", *Green Chemistry*, 2016

13 words — < 1%

[Crossref](#)

7 Moummou, El Kettani, R. Guti rrez, and R. Guti rrez-Sanchez. "A stochastic Gompertz model with logarithmic therapy functions: Parameters estimation", *Applied Mathematics and Computation*, 2012.

13 words — < 1%

[Crossref](#)

8 Amirshaghghi, H.. "Numerical simulation of methane partial oxidation in the burner and combustion chamber of autothermal reformer", *Applied Mathematical Modelling*, 201009

12 words — < 1%

[Crossref](#)

9 Rohani, B.. "Effects of hydrogen addition on the structure and pollutant emissions of a turbulent unconfined swirling flame", *International Communications in Heat and Mass Transfer*, 201205

12 words — < 1%

[Crossref](#)

10 T. Ishii, C. Zhang,, S. Sugiyama. "Effects of NO Models on the Prediction of NO Formation in a Regenerative Furnace", *Journal of Energy Resources Technology*, 2000

12 words — < 1%

[Crossref](#)

11 Arjunwadkar, Anand, Prabir Basu, and Bishnu Acharya. "A review of some operation and maintenance issues of CFBC boilers", *Applied Thermal Engineering*, 2016.

10 words — < 1%

[Crossref](#)

12 I.D. Ibrahim, Y. Hamam, Y. Alayli, T. Jamiru, E.R. Sadiku, W.K. Kupolati, J.M. Ndambuki, A.A. Eze. "A review on Africa energy supply through renewable energy production: Nigeria, Cameroon, Ghana and South Africa as a case study", Energy Strategy Reviews, 2021

10 words — < 1%

Crossref

13 Sharifi, Navid, and Masoud Boroomand. "An investigation of thermo-compressor design by analysis and experiment: Part 1. Validation of the numerical method", Energy Conversion and Management, 2013.

10 words — < 1%

Crossref

14 Afsin Gungor. "Simulation of NO Emission in Circulating Fluidized Beds Burning Low-grade Fuels", Energy & Fuels, 2009

9 words — < 1%

Crossref

15 Collot, A.G.. "Matching gasification technologies to coal properties", International Journal of Coal Geology, 20060117

9 words — < 1%

Crossref

16 S. Stoukatch, J.-F. Fagnard, F. Dupont, P. Laurent, J.-M. Redoute. "Non-contact thermal characterization using IR camera for compact metal-oxide gas sensor", 2021 IEEE 23rd Electronics Packaging Technology Conference (EPTC), 2021

9 words — < 1%

Crossref

17 A. R. COOPER. "Effect of Aspect Ratio and Viscosity Gradients on Flow Through Open Channels", Journal of the American Ceramic Society, 2/1960

8 words — < 1%

Crossref

18 Jinhao Xu, Dongmei Fu, Lizhen Shao, Xiaojun Zhang, Gang Liu. "A Soft Sensor Modeling of

8 words — < 1%

Cement Rotary Kiln Temperature Field Based on Model-Driven and Data-Driven Methods", IEEE Sensors Journal, 2021

Crossref

EXCLUDE QUOTES OFF

EXCLUDE BIBLIOGRAPHY OFF

EXCLUDE SOURCES OFF

EXCLUDE MATCHES OFF