

Utilization of catalyst-coated membrane (CCM) and spraying methods in fabrication membrane electrode assembly (MEA) for direct methanol fuel Cell (DMFC) using Pt-Co / C catalyst

by Dedi Rohendi

Submission date: 25-Sep-2022 03:57PM (UTC+0700)

Submission ID: 1908195712

File name: Rohendi_2019_J._Phys._Conf._Ser._1282_012065.pdf (1,008.53K)

Word count: 2075

Character count: 10577

PAPER · OPEN ACCESS

Utilization of catalyst-coated membrane (CCM) and spraying methods in fabrication membrane electrode assembly (MEA) for direct methanol fuel Cell (DMFC) using Pt-Co / C catalyst

To cite this article: D Rohendi *et al* 2019 *J. Phys.: Conf. Ser.* **1282** 012065

15

View the [article online](#) for updates and enhancements.

You may also like

- [Oxygen Reduction Reaction Activity for Surface-Magnetic-Anisotropy-Controlled Pt-Co/Pt\(111\) Bimetallic Surface](#)
Tetsuro Nagao, Morimichi Kimura, Naoto Todoroki *et al.*

- [Oxygen Evolution Reaction By Hierarchical Nanostructure Pt-Co₃O₄: The Use of Bicontinuous Microemulsion As a Soft Template](#)
Elijah T Adesuji, Esther Guardado Villegas, Margarita Sanchez-Dominguez *et al.*

- [Synthesis, Characterization and Properties of the Graphene Supported Pt-Co Nanocatalysts Towards the Electro-Oxidation of Methanol](#)
Jolita Jablonskiene, Loreta Tamasauskaitė, Ramasiunaite, Agne Matuseviciute *et al.*



ECS Membership = Connection

ECS membership connects you to the electrochemical community:

- Facilitate your research and discovery through ECS meetings which convene scientists from around the world;
- Access professional support through your lifetime career;
- Open up mentorship opportunities across the stages of your career;
- Build relationships that nurture partnership, teamwork—and success!

Join ECS!

Visit electrochem.org/join



Utilization of catalyst-coated membrane (CCM) and spraying methods in fabrication membrane electrode assembly (MEA) for direct methanol fuel Cell (DMFC) using Pt-Co / C catalyst

D Rohendi, N Syarif, M Said, M T Utami, Y Marcelina

Chemistry Dept., Faculty of Mathematics and Natural Sciences, Indralaya, South Sumatera Indonesia

Abstract. Utilization of Catalyst-Coated Membrane (CCM) and Spraying Methods in fabrication of Membrane Electrode Assembly (MEA) for Direct Methanol Fuel Cell (DMFC) Using a varied Pt-Co/C catalyst has been carried out. The use of Pt-Co/C catalyst is intended to reduce the use of Pt catalysts in the electrode. Electrodes and MEAs of the two methods are characterized and tested for performance, both in open circuit voltage (OCV) and under load conditions. The MEA performance test results with the spraying method show that the best performance MEA is obtained at the ratio of Pt: Co = 60: 40, while with the CCM method, the best MEA is obtained at the ratio of Pt: Co = 40: 60. However, the power density of the spraying method in the best conditions is greater than the CCM method.

1. Introduction

Direct Methanol Fuel Cell (DMFC) is one type of fuel cell with methanol as its fuel. DMFC is projected to meet the needs of portable power, such as those developed by Toshiba, Hitachi, Fujitsu and Samsung [1]. Fabrication DMFC electrodes is generally carried out by casting methods [2]. The obstacle of the casting method is the difficulty to control the level of thickness and porosity of the electrode. Another method often used in fabrication electrode is the spraying method [3] and the Catalyst Coated Membrane (CCM) methods [4]. The spraying method and the CCM method are widely used in making electrodes for PEMFC. In this study, electrodes and MEA were made using the spraying method and the CCM method for DMFC [5].

The most important component in DMFC (as is the case with PEMFC) is the Membrane Electrode Assembly (MEA) which is the center of the electrochemical reaction for the conversion of methanol (fuel) and oxygen (oxidants) into electricity and water as waste. MEA is a combination of cathode and anode that flank the electrolyte membrane on both sides [6]. Because the important function, the MEA must get special attention in terms of efforts to achieve high current density and durability. The thing that needs to be studied to produce high-performance MEA is the content and type of catalyst in the electrode and the method of making it.

Making DMFC electrodes is generally carried out by casting method [2]. The obstacle of the casting method is the difficulty in controlling the level of thickness and porosity of the electrode. In addition, the casting method will be difficult if the catalyst layer consists of several layers. Another method that is often used in making electrodes is the spraying method [7] and the Catalyst Coated Membrane (CCM) methods [8]. The last two methods are widely used in making electrodes for PEMFC. In this study compared both spraying methods and the CCM method in making electrodes and MEA for DMFC.



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

Published under licence by IOP Publishing Ltd

2. Experimental Section

2.1. Making of Gas Diffusion Layer (GDL) [9]

Making of GDL is done by attaching MPL (Microporous Layer) ink which consists of a mixture of carbon vulcan-XC72, PTFE and Ammonium bicarbonate using the spraying methods onto Backing layer (BL).

2.2. Making of Catalyst Layer (CL)

The Catalyst layer was made by mixing Pt-Co / C catalyst with various concentration with 2-propanol as solvent and nafion solution, then mixed in an ultrasonic homogenizer.

2.3. Making of Electrode and MEA

The electrodes are made in two ways, namely the spraying method by spraying the catalyst layer for the cathode and the anode onto the GDL then glued to both sides of the nafion-117 membrane to make the MEA. The second method is the CCM method where the catalyst layer is sprayed onto both sides of the membrane then GDL is attached to both sides of the membrane. the electrodes produced are characterized using XRD and Electrochemical Impedance Spectroscopy (EIS) and electrical conductivity analysis. MEA is made by pressing heat at a 135°C at a pressure of 2000 psi for 3 minutes.

3. Results and Discussion

3.1. XRD Analysis

XRD analysis of electrodes can be seen in Figure 1 below.

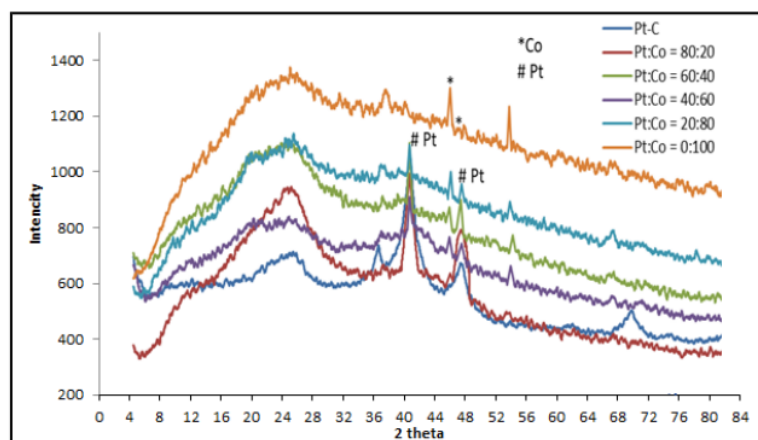


Figure 1. Diffractogram of electrode containing Pt/C, Pt-Co/C and Co/C catalyst.

Based on the XRD measurement results shown in Figure 1, the three electrodes (with Pt/C, Pt-Co/C and Co/C catalysts) show the diffraction pattern of the elements. This can be seen from the location and shape of the peak diffractogram for the element. A high peak at position $2\theta = 22-29^\circ$ shows the presence of carbon, while the peak in position $2\theta = 40-45^\circ$ shows the presence of platinum (JCPDS No.01-1194). However, the cobalt peak is not detected specifically, this is because the substituted cobalt is in the form of amorph so that XRD cannot detect it specifically. Cobalt peaks are usually seen at $2\theta = 45^\circ$ and 65° (10).

3.2. EIS Analysis

Electrochemical characterization and performance tests of the electrode, especially in the CL, are accomplished in various ways, including cyclic voltammetry (CV), linear sweep voltammetry (LSV), and electrochemical impedance spectroscopy (EIS). EIS is quite widely used by researchers for characterizing and testing PEMFC. EIS can be operated without damage, providing detailed diagnostic information on electrochemical phenomena included in the load transfer reactions at the electrode and electrolyte interface, the reaction mechanism and the electrode material properties.

The Analysis EIS of electrodes with various Pt-Co/C catalyst composition were described in figure 2.

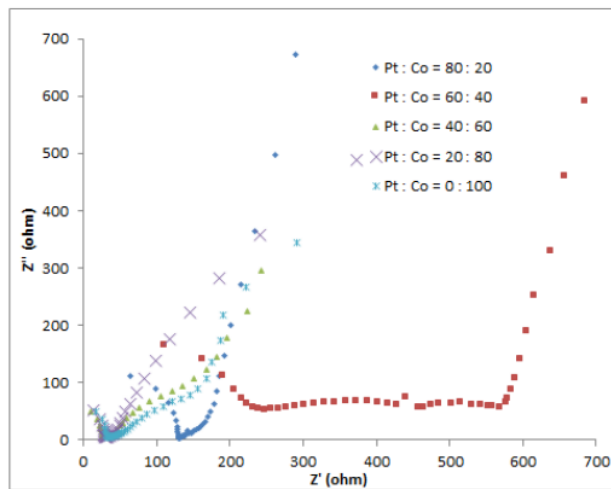


Figure 2. EIS Spectra of the electrodes with various composition of Pt-Co/C Catalyst

One of the performance of electrodes can be seen from the small impedance. Based on Figure 2 it can be seen that the electrode with the composition Pt:Co = 20:80 has a small impedance, as does Pt:Co = 0:100. This shows the opportunity to use cobalt as a companion catalyst for fuel cell electrodes.

3.3. Electrical Conductivity Analysis

Measuring the conductivity of Pt-Co/C electrodes is done to see the ability of the electrodes to deliver electric current. Conductivity analysis is one of the supporting parameters for determining the quality of an electrode. The electrical conductivity analysis results from the spraying method and the CCM method are presented in Figures 3.

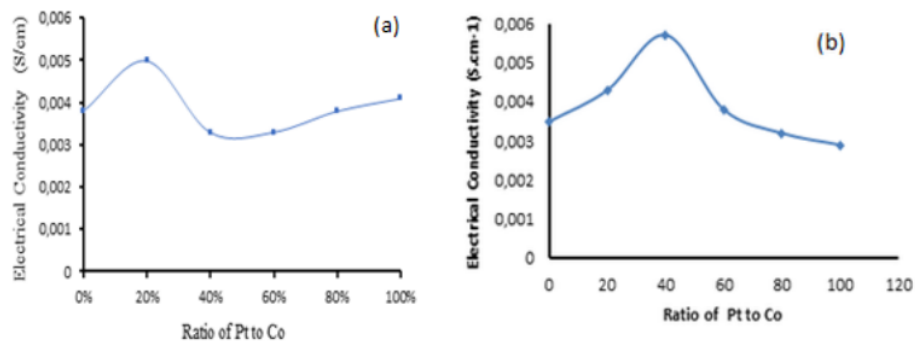


Figure 3. Electrical Conductivity of electrode (a) CCM Methods (b) spraying methods

Based on Figure 3, the electrical conductivity of Pt:Co = 20:80 and 40:60 have the highest conductivity, so it have the opportunity to be used aselectrode for the fuel cell.

3.4. MEA Performances

The MEA performance test is carried out to see the profile of the effect of current density on voltage and power density at various current densities. MEA performance of the two methods are shown in Figures 4 and 5.

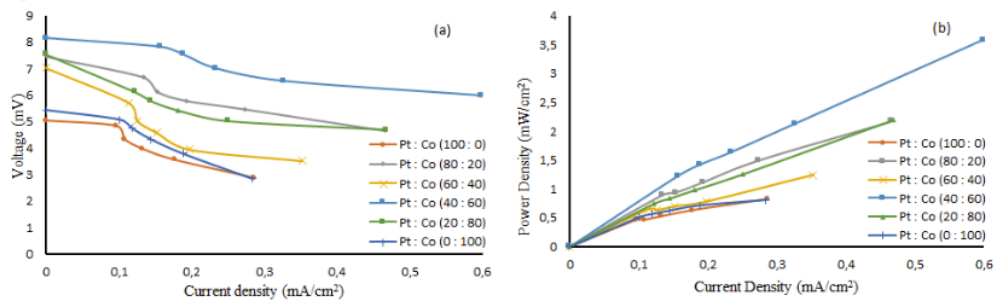


Figure 4. MEA Performance of electrode with the CCM Methods(a) I-V (b) P-I Performance

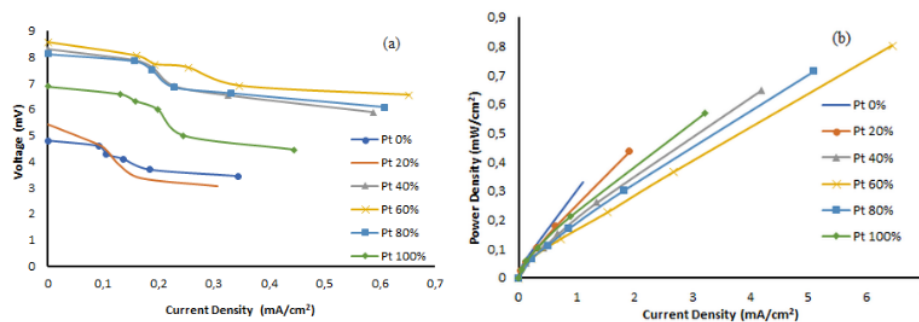


Figure 5. MEA Performance of electrode with the spraying methods (a) I-V (b) P-I performance

Based on Figure 4, it can be seen that MEA with Pt:Co catalyst content = 40:60 made with the CCM method has the best performance, while in Figure 5, MEA with Pt:Co catalyst content = 60:40 made by spraying method is the best performance. The factor that determines the performance of MEA is the high open circuit voltage (OCV) and the ability of MEA to maintain voltage at an increasing current density. In addition, in general, the performance of MEA will increase with increasing catalyst content, until the optimum active surface area of the catalyst is reached. The results of MEA performance measurements indicate that cobalt can be used as a supporting catalyst for platinum.

4. Conclusions

Based on the results of EIS analysis and electrical conductivity, electrodes with Pt-Co content = 20:80 and 40:60 show good performance. Meanwhile, the results of performance tests on the MEA with the spraying method found that the best performance was obtained at the ratio of Pt:Co = 60:40 and with the CCM method at the ratio of Pt:Co = 40:60, but the spraying method produced better performance.

Acknowledgment

The authors gratefully acknowledge the financial support given for this work by the Competitive Grants 2018 of Universitas Sriwijaya with the contract number: 108.153/UN9/SB3.LP2M.PT/2018.

References

- [1] Kamaruddin M Z F, Kamarudin S K, Daud W R W and Masdar M S 2013 An overview of fuel management in direct methanol fuel cells *Renew. Sustain. Energy Rev.* **24** 557–65
- [2] Zainoodin A M, Kamarudin S K, Masdar M S, Daud W R W, Mohamad A B and Sahari J 2014 Investigation of MEA degradation in a passive direct methanol fuel cell under different modes of operation *Appl. Energy* **135** 364–72.
- [3] Rohendi D, Majlan E H, Mohamad A B, Daud W R W and Kadhum A H 2013 Characterization of electrodes and performance tests on MEAs with varying platinum content and under various operational conditions *Int. J. Hydrogen Energy* 1–7
- [4] Kim K, Lee K, Kim H, Cho E, Lee S and Lim T 2010 The effects of Nafion[®] ionomer content in PEMFC MEAs prepared by a catalyst-coated membrane (CCM) spraying method *Int. J. Hydrogen Energy* **35** (5) 21, 19–26.
- [5] Zhang S, Yuan X-Z, Hin JNC, Wang H, Friedrich K A and Schulze M 2009 A review of platinum-based catalyst layer degradation in proton exchange membrane fuel cells *J. Power Sources* **194** (2) 588–600.
- [6] Rohendi D, Majlan E H, Mohamad A B and Daud W R W 2014 Effect of PTFE content and sintering temperature on the properties of a fuel cell electrode backing layer *J. of Fuel Cell Science and Tech.* **11** 041003-1-6 .
- [7] Park S and Popov BN 2011 Effect of a GDL based on carbon paper or carbon cloth on PEM fuel cell performance *Fuel* **90** (1) 436–40.
- [8] Kang J and Kim J 2010 Membrane electrode assembly degradation by dry / wet gas on a PEM fuel cell *Int J. Hydrogen Energy* **35**(23)13125–30.
- [9] Rohendi D, Majlan E H, Mohamad A B, Daud W R W and Kadhum A A H 2015 Effects of temperature and backpressure on the performance degradation of MEA in PEMFC *Int J. Hydrogen Energy* **40** 10960-68.
- [10] Loghmani M H and Shojaei A F 2014 Hydrogen production through hydrolysis of sodium borohydride: Oleic acid stabilized Co-La-Zr-B nanoparticle as a novel catalyst *Energy* **68** 152–9.

Utilization of catalyst-coated membrane (CCM) and spraying methods in fabrication membrane electrode assembly (MEA) for direct methanol fuel Cell (DMFC) using Pt-Co / C catalyst

ORIGINALITY REPORT

20%
SIMILARITY INDEX

9%
INTERNET SOURCES

18%
PUBLICATIONS

6%
STUDENT PAPERS

PRIMARY SOURCES

- 1** Yingying Ge, Chen Yang, Yichao Zhang, Hua Zhu. "RETRACTED: Research on Operating Modes and Strategies for Creative Enterprises in Jilin Province to Resolve Survival Crisis in the Big Data Age", IOP Conference Series: Earth and Environmental Science, 2020
Publication **3%**
- 2** E.H. Majlan, D. Rohendi, W.R.W. Daud, T. Husaini, M.A. Haque. "Electrode for proton exchange membrane fuel cells: A review", Renewable and Sustainable Energy Reviews, 2018
Publication **3%**
- 3** Dwi Hawa Yulianti, Dedi Rohendi, Nirwan Syarif, Addy Rachmat. "Characterization of Electrode with Various of Pt-Ru/C Catalyst Loading and the Performance Test of Membrane Electrode Assembly (MEA) in Passive Direct Methanol Fuel Cell (DMFC)", Key Engineering Materials, 2020 **3%**

4 nlist.inflibnet.ac.in 1 %
Internet Source

5 Yuanting Shen, Xiaohui Yan, Liang An, Shuiyun Shen, Lu An, Junliang Zhang. "Portable proton exchange membrane fuel cell using polyoxometalates as multi-functional hydrogen carrier", *Applied Energy*, 2022 1 %
Publication

6 Dedi Rohendi, Edy Herianto Majlan, Abu Bakar Mohamad, Wan Ramli Wan Daud, Abdul Amir Hassan Kadhum, Loh Kee Shyuan. "Characterization of electrodes and performance tests on MEAs with varying platinum content and under various operational conditions", *International Journal of Hydrogen Energy*, 2013 1 %
Publication

7 link.springer.com 1 %
Internet Source

8 Myers, Deborah, and Xiaoping Wang. "Ex situ Electrochemical Methods for the Characterization of PEFC Nanomaterial Degradation", *Polymer Electrolyte Fuel Cells Science Applications and Challenges*, 2013. 1 %
Publication

9	A.M. Zainoodin, S.K. Kamarudin, M.S. Masdar, W.R.W. Daud, A.B. Mohamad, J. Sahari. "Optimization of a porous carbon nanofiber layer for the membrane electrode assembly in DMFC", Energy Conversion and Management, 2015 Publication	1 %
10	Submitted to Clarkson University Student Paper	1 %
11	Kamarudin, S.K.. "Materials, morphologies and structures of MEAs in DMFCs", Renewable and Sustainable Energy Reviews, 201206 Publication	1 %
12	Submitted to University of Surrey Student Paper	1 %
13	Submitted to Yakın Doğu Üniversitesi Student Paper	1 %
14	shura.shu.ac.uk Internet Source	1 %
15	Kontee Thongthai, Phakkhananan Pakawanit, Narong Chanlek, Jun-Hyun Kim, Supon Ananta, Laongnuan Srisombat. "Ag/Au/Pt trimetallic nanoparticles with defects: preparation, characterization, and electrocatalytic activity in methanol oxidation", Nanotechnology, 2017 Publication	1 %

Exclude quotes On
Exclude bibliography On

Exclude matches < 1%