

pulp and paper

by Susila Arita

Submission date: 06-Apr-2023 07:23PM (UTC+0700)

Submission ID: 2057504539

File name: pdf-156004-83412-DIAN_JEE.pdf (1.1M)

Word count: 3793

Character count: 18756

Pulp and Paper Wastewater Treatment with Bottom Ash Using Jar Test

Dian F. Pisceselia¹, Susila Arita^{2*}, Tuty Emilia Agustina²

¹ Master Program of Chemical Engineering, Environmental Technology, Faculty of Engineering, Universitas Sriwijaya, Jl. Sriwijaya Negara, Bukit Besar, Palembang 30139, South Sumatera, Indonesia

² Chemical Engineering Department, Faculty of Engineering, Universitas Sriwijaya, Jl. Raya Palembang-Prabumulih KM 32 Indralaya, Ogan Ilir, 30662, South Sumatera, Indonesia

* Corresponding author's e-mail: susilaarita@ft.unsri.ac.id

ABSTRACT

The wastewater generated from pulp and paper production still contains pollutants and contaminants, so appropriate and economical materials are needed to reduce pollutants by using adsorbents from bottom ash. This study examined the characteristics of bottom ash and pulp and paper wastewater, the effect of stirring time, stirring speed, and adsorbent activation temperature on decreasing the environmental parameters of wastewater. The synthesis of bottom ash as an adsorbent was carried out by heating at 100 and 200 °C for 1 hour. The wastewater treatment process with maximum yield occurs at a stirring speed of 100 rpm for 50 min. The use of bottom ash without heating as an adsorbent in the pulp and paper wastewater treatment process has reduced TSS 77.5%, COD 85.72%, chloride 26.9%, TDS 1143 ppm, and EC 2180 s/cm, which have met the environmental quality standards.

Keywords: adsorbent, pulp and paper wastewater, bottom ash, jar test.

INTRODUCTION

The pulp and paper industry is one of the leading agro-industry commodities in Indonesia. Indonesia's pulp industry ranks eighth in the world, and the paper industry ranks sixth in the world. In its development, paper is needed in great amounts in everyday life, not only as stationery, books, or magazines, but also as cigarette wrappers, food, drinks, and so on. The production capacity of the pulp industry in Indonesia has reached 10 million tons. In comparison, the paper has achieved 17 million tons, with the need for raw materials bearing 45 million m³ (Ministry of Industry of the Republic of Indonesia, 2021).

Pulp and paper industrial waste impact the environment, because the production process requires chemicals and other supporting materials, which can be categorized as B3 waste. Further handling of waste is necessary. Pulp and paper industrial waste consist of gas, liquid, and solid fractions (Sharma et al., 2022). The wastewater generated from the pulp and paper industry contains

biological oxygen demand (BOD), chemical oxygen demand (COD), phosphates, heavy metals, and other contaminants (Söderholm et al., 2019; Haq and Raj, 2020). The wastewater also contains organic and inorganic compounds, such as lignin which causes black waste and has a high chemical oxygen demand (COD) value. This disrupts the photosynthesis process in aquatic biota due to the lack of supply of sunlight entering the water (Kumar et al., 2015).

Most of the pulp and paper industry uses bleach that contains chlorine. Chlorine will react with organic compounds in wood to form toxic compounds, such as dioxins (Mandeep et al., 2019). Waste materials, such as leather and sawdust in the pulp and paper industry are used as fuel in the power boiler unit. Solid waste management can be divided into two classes: solid waste, which belongs to the category of B3 waste, and non-B3 solid waste. Thus far, WWTP mud waste and burning ash have only been stockpiled using the landfill method, causing problems, such as limited land and contaminated soil. In addition to

wastewater, the Pulp and Paper Industry produces solid waste, including boiler fly ash and bottom ash. This research focused on utilizing bottom ash as an adsorbent to treat pulp and paper industrial wastewater. The most common components in bottom ash are silica (SiO_2) and alumina (Al_2O_3), and others in the form of iron (III) oxide (Fe_2O_3), calcium oxide (CaO), magnesium oxide (MgO), sodium oxide (NaO) and potassium oxide (K_2O) (Aprilita and Suherman, 2017; Abdullah et al., 2019; Rosales et al., 2017).

Bottom ash has a fairly large particle size compared to fly ash, a high surface area and porosity, as well as good adsorption capacity to absorb heavy metals and organic compounds (Aprilita and Suherman, 2017). Silicate and aluminate components in bottom ash can be used as adsorbents in treating pulp and paper wastewater. Thus far, bottom ash from coal combustion is widely used as an economical cement mixture (Singh et al., 2020; Argiz et al., 2017; Tayeh et al., 2019). Fly ash and bottom ash (FABA) are also used as raw materials that are environmentally friendly and ecologically beneficial in manufacturing bricks, so that FABA has the same strength as bricks derived from clay (Sutcu et al., 2019; May et al., 2021; Azevedo et al., 2019).

Several researchers have also conducted research on the use of bottom ash as an adsorbent (Mahidin et al., 2017; Wahyuni et al., 2018; Zhou et al., 2019; Jaya and Telaumbanua, 2020; Hong et al., 2021; Samaka et al., 2021; Mahmood, 2021).

On the basis of the literature, bottom ash can be used as a potential adsorbent because of its affordable price. Bottom ash is abundant with the main composition of SiO_2 and Al_2O_3 . Bottom ash can come from coal or lignocellulosic-based industries which can absorb pollutants in wastewater higher, as found by Zhou et al. (2019). This study aimed to reduce the concentration of pollutants and contaminants in pulp and paper wastewater with efficient, inexpensive, and environmentally friendly adsorbents. The raw material used in this study is bottom ash which is physically activated to remove impurities in the bottom ash and open pores and to improve the absorption performance of compounds in solution (Syarif et al., 2021). Bottom ash characteristics were analyzed in this study to assess the performance of the adsorbent in managing pulp and paper wastewater.

MATERIALS AND METHOD

Pulp and paper wastewater and bottom ash as adsorbents were taken from the local pulp and paper industry in South Sumatra, Indonesia. The research took place using the jar test method. The parameters analyzed in wastewater treatment with bottom ash adsorbent consisted of pH, TDS, EC, COD, TSS, and Cl⁻. Bottom ash characterization was performed before and after the wastewater treatment process using X-ray fluorescence spectroscopy (PANalytical Epsilon 3 XLE XRF)

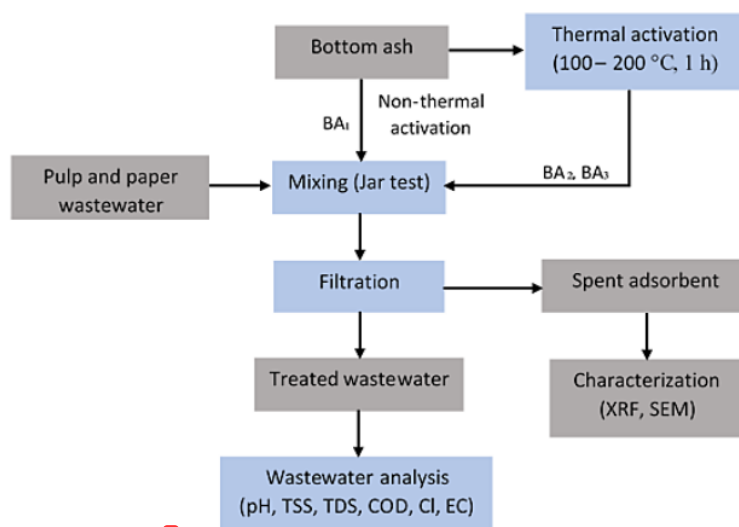


Figure 1. Diagram of pulp and paper wastewater treatment process with bottom ash adsorbent

and Scanning Electron Microscope (SEM JEOL-JSM-6510 LA) method. This research took place according to the scheme shown in Figure 1.

Bottom ash adsorbent activation

The bottom ash was activated by heating using an oven at 100 °C and 200 °C for 1 hour. The heating process is intended to remove the water in the bottom ash and open the pores of the bottom ash so that it can absorb more pollutants in the pulp and paper wastewater. The characteristics of bottom ash before and after activation were analyzed using XRF and SEM to identify chemical composition and surface morphology.

The analysis of bottom ash adsorbent by jar test

The bottom ash is weighed with a mass of 100 g in 500 ml of wastewater. Erlenmeyer was placed in a jar test with a stirring speed of 100, 200, and 300 rpm at room temperature with a time variation of 10, 20, 30, 40, and 50 minutes. Afterwards, the mixture was separated by filtering it using a filter paper. The wastewater treated with bottom ash adsorbent was then measured for hardness, electrical conductivity, pH, TSS, COD, and chloride with the standards and test methods in Table 1.

RESULTS AND DISCUSSION

Bottom ash adsorbent performance

The results of water quality measurements obtained from the wastewater treatment process using bottom ash adsorbents are summarized in Table 2. The initial raw material has a pH of 7.1, a TDS of 1455 ppm, and an EC of 2816 s/cm with a cloudy yellow wastewater color. Wastewater treatment with bottom ash adsorbent occurs under optimum conditions, namely 50 minutes of stirring time and 100 rpm stirring speed.

Bottom ash has high basicity or is more alkaline (Kim et al., 2021). Hence, bottom ash adsorbent can increase the pH of wastewater without heating or heating to 8.6. This indicates that the pH value obtained still meets the environment quality standard range based on the Minister of Environment Regulation No. 5 of 2014 concerning Pulp and Paper Wastewater Quality Standards. In the measurement of TDS, the decrease is highly dependent on the length of processing time, which can be seen for the processing time of 50 minutes, the percentage of TDS removal is up to 21.4%, and the processing time for 10 minutes is only 6%. Meanwhile, EC is directly related to the amount of metal dissolved in wastewater. According to Park et al. (2020), the FABA from the wood-burning process have great potential to reduce the heavy metal levels in wastewater and waste from the combustion process.

Table 1. Wastewater parameter analysis method

Parameter	Unit	Standard Method	Analysis Method
pH	-	SNI 6989.11-2019	pH analysis
TDS	mg/L	SNI 6989.27-2019	Gravimetric/conductivity
TSS	mg/L	SNI 06-6989.3-2004	Gravimetric
COD	mg/L	SNI 6989.73:2019	Titrimetric analysis (closed)
Cl ⁻	mg/L	SNI 06-6989.19.2000	Argentometry
Electrical conductivity	µs/cm	SNI 6989.1:2019	Conductivity meter

Table 2. Analysis results of pulp and paper wastewater using jar test

Stirring speed (rpm)	Time (min)	Parameter								
		pH			TDS (ppm)			EC (µs/cm)		
		BA ₁	BA ₂	BA ₃	BA ₁	BA ₂	BA ₃	BA ₁	BA ₂	BA ₃
100	50	7.4–7.6	7.7–8.1	8.8–8.6	6.39–20.62	6.39–11.82	6.39–21.44	8.88–19.21	8.88–15.66	8.88–22.59
200	50	7.6–7.7	7.8–8.1	8.4–8.5	0–11.82	0.27–6.39	6.39–11.82	-6.61–14.60	-9.94–2.17	-6.61–18.86
300	50	8–8.2	7.6–7.9	8.3–8.6	3.23–11.82	0–6.53	6.39–20.62	8.88–19.92	-6.61–12.22	12.22–19.92

Note: BA₁ – without heating, BA₂ – heating at 100 °C, BA₃ – heating at 200 °C.

COD, TSS, and chloride reduction efficiency by using a jar test

The results found a decrease in COD, TSS, and chloride resulting from the processing with bottom ash adsorbent using the Jar test. In the Jar test process, coagulation and flocculation processes occur. In the coagulation process, there is a destabilization of colloids and particles in wastewater caused by heating on the physical activation of the adsorbent (Puchana-Rosero et al., 2018). The COD, TSS, and chlorine values with stirring speed in the jar test process of 100 rpm are summarized in Table 3.

Before processing, the COD, TSS, and chloride values were 893 mg/L, 80 ppm, and 66.74, respectively. The absorption process using an adsorbent without heating (BA₁) showed a decrease in the COD, TSS, and chloride values, which were 163 mg/L, 75 ppm, and 48.74, respectively. On heating bottom ash with a temperature of 100 °C (BA₂), the COD, TSS, and chloride values were obtained at 145 mg/L, 31 ppm, and 44.31. Wastewater treatment using bottom ash with heating at 200 °C (BA₃) received the COD, TSS, and chloride values of 132

mg/L, 18 ppm, and 48.74. The high metal content in bottom ash, such as aluminum, calcium, iron, and silica, has acted as a potential coagulant to form small particles (Luo et al., 2020). Fast stirring has helped mix the adsorbent in the wastewater evenly. The adsorbent in wastewater can bind suspended solids to improve the resulting precipitate.

The COD analysis calculates the levels of organic matter that can be oxidized by using strong oxidizing chemicals in acidic media. From the processing results, the COD, TSS, and chlorine levels decreased due to the activation of bottom ash by heating treatment at a temperature of 200 °C. Activation at higher temperatures has enlarged the pores on the surface of the adsorbent. According to Jamaludin (2020), coal bottom ash can reduce the values of TSS, BOD, and turbidity by 41.6%, 65.3%, and 75.6% of batik waste.

Characteristics of bottom ash adsorbent before and after the adsorption process

The morphology of the surface of bottom ash grains determines the concentration of elements

Table 3. Efficiency of COD, TSS and Chlorine reduction

Parameter	Before adsorption	After adsorption			Quality standards	Reduction efficiency (%)		
		BA ₁	BA ₂	BA ₃		BA ₁	BA ₂	BA ₃
COD (mg/L)	893	163	145	132	300	81.7	83.7	85.2
TSS (ppm)	80	75	31	18	100	6.25	61.2	77.5
Cl ⁻	66.74	48.74	44.31	48.74	-	26.9	33.6	26.9

Note: BA₁ – without heating, BA₂ – heating at 100 °C, BA₃ – heating at 200 °C.

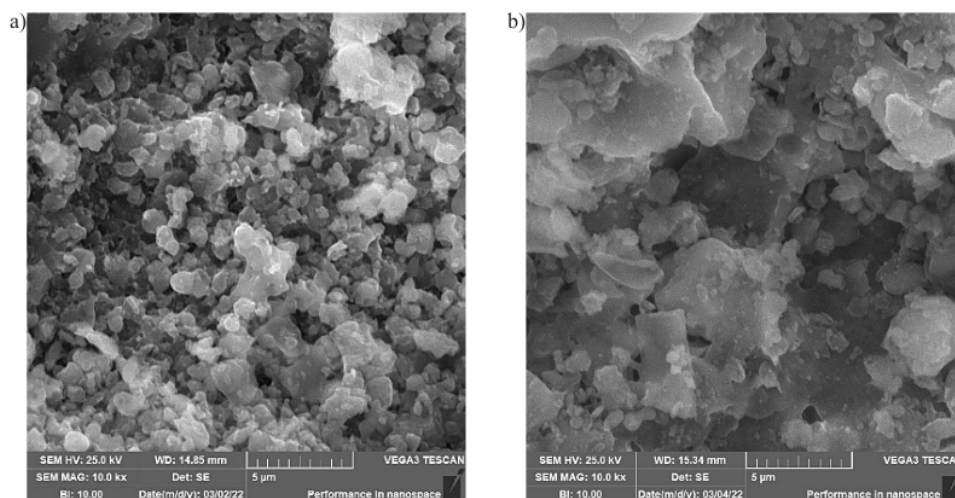


Figure 2. Morphology of bottom ash (a) before and (b) after adsorption

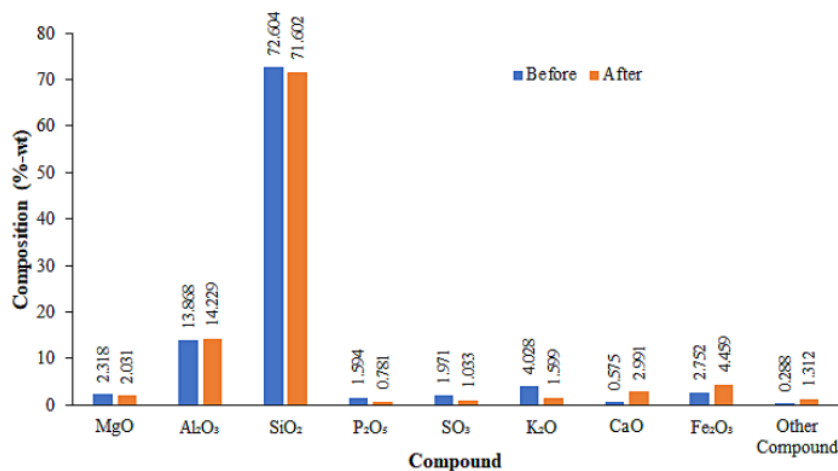


Figure 3. Chemical composition of bottom ash before and after adsorption

present on the surface of bottom ash (Mutalib et al., 2017). The surface morphology of bottom ash at 10,000 magnification is shown in Figure 2. According to Bumanis et al. (2013), bottom ash has a coarse, sandy, and angular structure caused by metal compounds deposited on the surface. After the processing occurs, it is seen that several compounds increase, such as calcium oxide, iron oxide, and a little titanium oxide which is possible from the waste water of the pulp and paper industry.

The composition of the bottom ash adsorbent determined using the XRF method is shown in Figure 3. The dominant compounds in bottom ash are MgO, Al₂O₃, and SiO₂. It can be seen that there is no significant change in the composition of bottom ash after being able to reduce the levels of COD, TDS, and TSS in wastewater.

CONCLUSIONS

Pulp and paper wastewater treatment with bottom ash using jar test has successfully reduced the value of COD, TDS, TSS, EC, and chloride, which have met environmental quality standards. The optimum percentage reduction was seen in removing COD, TSS, and Cl⁻ of 85.2 mg/L, 77.5 ppm, and 26.9 with a stirring speed of 100 rpm for 50 min.

REFERENCES

1. Abdullah M.H., Rashid A.S.A., Anuar U.H.M., Marto A., Abuelgasim R. 2019. Bottom ash utilization: A review on engineering applications and environmental aspects. IOP Conference Series: Materials Science and Engineering, 527(1). <https://doi.org/10.1088/1757-899X/527/1/012006>
2. Aprilita N.H., Suheeman S. 2017. Utilization of Coal Bottom Ash a Low-Cost Adsorbent for the Removal Acid Red 114 Dye. Jurnal Eksakta, 17(1), 11–19. <https://doi.org/10.20885/eksakta.vol17.iss1.art2>
3. Argiz C., Sanjuán M.Á., Menéndez E. 2017. Coal Bottom Ash for Portland Cement Production. Advances in Materials Science and Engineering, 2017. <https://doi.org/10.1155/2017/6068286>
4. Azevedo A.R.G., Marvila T.M., Fernandes W.J., Alexandre J., Xavier G.C., Zanelato E.B., Cerqueira N.A., Pedroti L.G., Mendes B.C. 2019. Assessing the Potential of Sludge Generated by the Pulp and Paper Industry in Assembling Locking Blocks. Journal of Building Engineering, 23(November), 334–340. <https://doi.org/10.1016/j.job.2019.02.012>
5. Bumanis G., Bajare D., Korjakins A. 2013. The economic and environmental benefits from incorporation of coal bottom ash in concrete. International Scientific Conference: Civil Engineering, 4, Jelgava, Latvia 2013, 142–152. <http://agris.fao.org/agris-search/search.do?recordID=LV2013000767>
6. Haq I., Raj, A. 2020. Pulp and Paper Mill Wastewater: Ecotoxicological Effects and Bioremediation Approaches for Environmental Safety. Bioremediation of Industrial Waste for Environmental Safety, 333–356. https://doi.org/10.1007/978-981-13-3426-9_14
7. Hong Y., Kim J., Kim H., Lee S., Kim S. 2021. Bottom Ash Modification via Sintering Process for Its Use as a Potential Heavy Metal Adsorbent: Sorption Kinetics and Mechanism.
8. Jamaludin M.Z. 2020. Study on Removal of Pollutant from Batik Wastewater using Coal Bottom

- Ash (CBA). IOP Conference Series: Earth and Environmental Science, 476(1). <https://doi.org/10.1088/1755-1315/476/1/012033>
9. Jaya J., Telaumbanua P. 2020. Using Fly Ash and Bottom Ash Boiler of Palm Oil Factories As Adsorbents for Adsorption of Color In Artificial Liquid Waste, 11(2), 59–67.
 10. Kim J., Kim H., Shin S. 2021. An evaluation of the physical and chemical stability of dry bottom ash as a concrete light weight aggregate. *Materials*, 14(18). <https://doi.org/10.3390/ma14185291>
 11. Kumar V., Chopra A.K., Kumar S., Singh J., Thakur Roushan K. 2015. Effects of Pulp and Paper Mill Effluent Disposal on Soil Characteristics in the Vicinity of Uttaranchal Pulp and Paper Mill, Haridwar (Uttarakhand), India. *International Journal of Agricultural Science Research*, 4(June), 117–125.
 12. Luo F., Wu Z., Wang M., Shu X., Shu X., Jia P., Li Q. 2020. High-Performance Flocculants for Purification: Solving the Problem of Waste Incineration Bottom Ash and Unpurified Water. *ACS Omega*, 5(22), 13259–13267. <https://doi.org/10.1021/acsomega.0c01296>
 13. Mahidin M., Sulaiman T.N., Muslim A., Gani A. 2017. Removal of Mn(II) from the Acid Mine Wastewaters Using Coal Fired Bottom Ash. IOP Conference Series: Materials Science and Engineering, 206(1). <https://doi.org/10.1088/1757-899X/206/1/012095>
 14. Mahmood D. 2021. Phosphate Removal from Wastewater by Furnace Bottom Ash. IOP Conference Series: Materials Science and Engineering, 1184(1), 012010. <https://doi.org/10.1088/1757-899x/1184/1/012010>
 15. Mandeep, Gupta G.K., Liu H., Shukla P. 2019. Pulp and Paper Industry–Based Pollutants, Their Health Hazards and Environmental Risks. *Current Opinion in Environmental Science and Health*, 12, 48–56. <https://doi.org/10.1016/j.coesh.2019.09.010>
 16. May N.H., Phuoc H.T., Phieu L.T., Anh N. Van, Khai C.M., Nong L. 2021. Recycling of waste incineration bottom ash in the production of interlocking concrete bricks. *Journal of Science and Technology in Civil Engineering (STCE) - NUCE*, 15(2), 101–112. [https://doi.org/10.31814/stce.nuce2021-15\(2\)-09](https://doi.org/10.31814/stce.nuce2021-15(2)-09)
 17. Ministry of Industry of the Republic of Indonesia. 2021. Mungkinkah Peran Industri Bersandar pada Industri Pulp dan Paper? <https://kemenperin.go.id/kinerja-industri>
 18. Mutalib M.A., Rahman M.A., Othman M.H.D., Ismail A.F., Jaafar J. 2017. Scanning Electron Microscopy (SEM) and Energy-Dispersive X-Ray (EDX) Spectroscopy. In *Membrane Characterization*. Elsevier B.V. <https://doi.org/10.1016/B978-0-444-63776-5.00009-7>
 19. Park J.H., Eom J.H., Lee S.L., Hwang S.W., Kim S.H., Kang S.W., Yun J.J., Cho J.S., Lee Y.H., Seo D.C. 2020. Exploration of The Potential Capacity of Fly Ash and Bottom Ash Derived from Wood Pellet-Based Thermal Power Plant for Heavy Metal Removal. *Science of the Total Environment*, 740, 140205. <https://doi.org/10.1016/j.scitotenv.2020.140205>
 20. Puchana-Rosero M.J., Lima E.C., Mella B., Da Costa D., Poll E., Gutterres M. 2018. A coagulation-flocculation process combined with adsorption using activated carbon obtained from sludge for dye removal from tannery wastewater. *Journal of the Chilean Chemical Society*, 63(1), 3867–3874. <https://doi.org/10.4067/s0717-97072018000103867>
 21. Rosales, J., Cabrera, M., Beltrán M.G., López M., Agrela F. 2017. Effects of Treatments on Biomass Bottom Ash Applied to the Manufacture of Cement Mortars. *Journal of Cleaner Production*. <https://doi.org/10.1016/j.jclepro.2017.04.024>
 22. Samaka I.S., Al-Janabi A., Abduldredha M., Alkandari A., Abdellatif M., Yeboah D. 2021. Reusing of Furnace Bottom Ash as an Adsorbent for Phosphate Removal from Water. IOP Conference Series: Materials Science and Engineering, 1058(1), 012006. <https://doi.org/10.1088/1757-899x/1058/1/012006>
 23. Sharma P., Iqbal H.M.N., Chandra R. 2022. Evaluation of Pollution Parameters and Toxic Elements in Wastewater of Pulp and Paper Industries in India: A Case Study. *Case Studies in Chemical and Environmental Engineering*, 5(September 2021), 100163. <https://doi.org/10.1016/j.csee.2021.100163>
 24. Singh N., Shehnazdeep, Bhardwaj A. 2020. Reviewing the role of coal bottom ash as an alternative of cement. *Construction and Building Materials*, 233, 117276. <https://doi.org/10.1016/j.conbuildmat.2019.117276>
 25. Söderholm P., Bergquist A.K., Söderholm K. 2019. Environmental Regulation in the Pulp and Paper Industry: Impacts and Challenges. *Current Forestry Reports*, 5(4), 185–198. <https://doi.org/10.1007/s40725-019-00097-0>
 26. Sutcu M., Erdogmus E., Gencel O., Gholampour A., Atan E., Ozbakkaloglu T. 2019. Recycling of bottom ash and fly ash wastes in eco-friendly clay brick production. *Journal of Cleaner Production*, 233, 753–764. <https://doi.org/10.1016/j.jclepro.2019.06.017>
 27. Syarif, A., Rusdianasari, Yerizam, M., Sayhi-manyusi. 2021. Characterization of Thermal Activated Fly Ash Adsorbent by Studying the Effect

- of Temperature. Proceedings of the 4th Forum in Research, Science, and Technology (FIRST-T1-T2-2020), 7, 81–84. <https://doi.org/10.2991/ahe.k.210205.015>
28. Tayeh B.A., AlSaffar D.M., Askar L.K., Jubeh A.I. 2019. Effect of incorporating pottery and bottom ash as partial replacement of cement. *Karbala International Journal of Modern Science*, 5(4), 270–279. <https://doi.org/10.33640/2405-609X.1220>
29. Wahyuni N.L.E., Soeswanto B., Akmal H., Puspita N. 2018. Effect of Particle Size Distribution and Acid Treated Coal Bottom Ash on TSS and COD Removal from Textile Effluent using Fixed Bed Column. *IOP Conference Series: Earth and Environmental Science*, 160(1). <https://doi.org/10.1088/1755-1315/160/1/012015>
30. Zhou H., Bhattarai R., Li Y., Li S., Fan Y. 2019. Utilization of Coal Fly and Bottom Ash Pellet for Phosphorus Adsorption: Sustainable Management and Evaluation. *Resources, Conservation and Recycling*, 149(March), 372–380. <https://doi.org/10.1016/j.resconrec.2019.06.017>

pulp and paper

ORIGINALITY REPORT

23%

SIMILARITY INDEX

15%

INTERNET SOURCES

14%

PUBLICATIONS

6%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

12%

★ www.jeeng.net

Internet Source

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On