

utilisation bentonit

by Susila Arita

Submission date: 06-Apr-2023 09:37PM (UTC+0700)

Submission ID: 2057595633

File name: Utill-nitrogen_naswir_2019-32.pdf (213.62K)

Word count: 3161

Character count: 16401

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/335738640>

Utilization of activated bentonite to reduce nitrogen on palm oil mill

Article in *International Journal of Chemical Sciences* - September 2019

CITATIONS
0

READS
38

6 authors, including:



Muhammad Naswir
Universitas Jambi

13 PUBLICATIONS 28 CITATIONS

SEE PROFILE



Susila Arita Rachman

23 PUBLICATIONS 41 CITATIONS

SEE PROFILE



Yudha Gusti Wibowo
Universitas Jambi

19 PUBLICATIONS 21 CITATIONS

SEE PROFILE



Utilization of activated bentonite to reduce nitrogen on palm oil mill

Muhammad Naswir¹, Lusila Arita², Desfournatalia³, Widi Hartati⁴, Lusi Septiarini⁵, Yudha Gusti Wibowo⁶

¹ Department of Engineering, Universitas Jambi, Jambi, Indonesia

² Department of Environmental Science, Universitas Sriwijaya, Palembang, Indonesia

^{3,4,5} Department of Chemical Education, Universitas Jambi, Jambi, Indonesia

⁶ Department of Environmental Science, Universitas Jambi, Jambi, Indonesia

Abstract

The purpose of this study was to look at the ability of activated bentonites to absorb nitrogen derived from palm oil mill wastewater. Sampling of bentonite was obtained from the Sungai Rengas in Jambi Province, Indonesia. Bentonite was smoothed and activated using a 1.6 M HCl solution. Measurement of nitrogen content using UV-vis instruments. The results showed that the activated bentonite had the ability that was relatively similar in its ability to absorb nitrogen elements, with a mass of 1 gram and contact time of 90 minutes when the bentonite was pressed against an element of nitrogen from the wastewater treatment plant at 81.5%.

Keywords: bentonite, Activated bentonite, nitrogen, adsorption, wastewater, palm oil mill

1. Introduction

Nitrogen is the most abundant element in the earth's biosphere (Vincenzo et al., 2016) [18]. In addition, nitrogen is one of six elements (C, H, O, N, P, and S) which are the main elements of living tissue (Watson et al., 2019) [19]. The atmosphere of the earth consists of 78% gas nitrogen (N₂), but most of these elements cannot be used by living things. Nitrogen in water can be found in organic nitrogen, ammonia (NH₃), ammonium (NH₄), nitrite (NO₂), nitrate (NO₃), and molecular nitrogen (N₂) in the form of gases. Excess nitrogen causes a decrease in dissolved oxygen levels due to two ongoing processes namely nitrification and eutrophication (Chai et al., 2019; Rivett et al., 2008) [3, 17]. Nitrification is a change in the chemical reaction of ammonium compounds into nitrates which requires a very large amount of oxygen (Rivett et al., 2008) [17]. This will cause a decrease in dissolved oxygen levels in the waters. Whereas eutrophication is a growth event of living things such as algae and algae that takes place rapidly when the nutrient content in the waters is in excessive amounts. Another impact caused is nitrogen pollution and ammonia toxicity. Ammonia contained in water in the form of NH₄ ions and NH₃ gas causes toxins in living things such as fish in these waters. From this explanation it can be identified that nitrogen compounds can cause environmental pollution (Wibowo & Sadikin, 2019) [22]. In general, these nitrogen compounds can be combined as total nitrogen (Ahn, 2006) [2].

Liquid waste palm oil processing plants contain high organic matter, one of which is Nitrogen. The organic material is a nutrient so that the liquid waste has the opportunity to be used as a source of nutrients for plants. However, if the nitrogen content in palm oil mill exceeds the threshold, it can pollute the environment and disrupt aquatic plants and animal ecosystems. Industrial activity will give negative impact for environment (Winarno et al., 2019) [23]. Based on the Decree of the State Minister of

Environment No. 51 of 1995 quality standards palm oil industry wastewater maximum levels of total nitrogen (N) is 50.0 mg/l with a maximum pollution load of 0.125 kg/ton.

Ammonia in wastewater is often formed due to chemical processes naturally (Karri et al., 2018) [8]. The effect of ammonia on human health, which can cause irritation to the eye if the ammonia content in water is greater than 0 mg/L (Li & Pauluhn, 2010) [9]. The effect of nitrites on human health, that is, can cause methemoglobinemia and the toxic effects of nitrite in water greater than 0 mg/L (Hord et al., 2009) [7]. Nitrite is a fertilizer in aquatic plants. Abundance of nutrient elements this nitrate in water is called eutrophication (Conley et al., 2009) [4]. The negative effect of this eutrophication is the change in the balance of life between aquatic plants and aquatic animals (Yang et al., 2008). The effect of nitrate on human health is that it can cause methemoglobinemia in infants who consume water with nitrate concentrations of more than 45 mg/L. One method that can be used to reduce the nitrogen content of palm oil mill wastewater is adsorption. Adsorption is the absorption of a substance (molecule or ion) on the surface of the adsorbent (Wibowo & Naswir, 2019; Wibowo et al., 2019) [20, 2]. In this study bentonite was used as an adsorbent. Bentonite has superior adsorption properties because the size of colloidal particles is very small and has a high surface ion capacity. Several studies on the use of bentonite have been applied for absorption of inorganic elements such as Cd²⁺ ions, Pb²⁺ and Cu²⁺. Mn²⁺ and NO₃, Ni, and Fe (Naswir, 2016; Naswir et al., 2018; Naswir et al., 2014; Naswir et al., 2011; Naswir et al., 2013; Naswir et al., 2013) [10-16]. The use of bentonite applied to the absorption of organic compounds, there was no specific absorption on organic nitrogen elements. In this study an analysis of total nitrogen-organic matter was carried out on Palm Oil Mill wastewater. The sample used is wastewater taken in anaerobic ponds and aerobic pools of PT. Deli Muda Perkasa, Mersam, Jambi. Total nitrogen content was

analyzed by UV-vis Spectrophotometry method. Bentonite is activated using HCl. The adsorption test will be carried out using bentonite with the mass and contact time obtained in previous studies. From this research, it is expected that bentonite has good effectiveness as nitrogen element adsorbent.

Materials and methods

Tools and Materials

The tools used in this study are Erlenmeyer, clamp, beaker, measuring cup, measuring flask, measuring pipette, spatula, stirring rod, ball pipettes, glass funnels, analytic balance, ovens, shakers, crucible, mortar, desiccator, filter paper, watch glass, and instruments used SEM-EDS, XRD, UV-Vis spectrophotometry, and atomic absorption spectrophotometer (AAS). The materials used in this study were wastewater samples in aerobic and anaerobic ponds, bentonite, NaOH, KNO₃, K₂S₂O₈, HCl, and distilled water.

Sample preparation

200 gr bentonite samples were cleaned and washed with distilled water, then dried in an oven (Temperature=105°C, time=24 hours) to remove water content. The dried bentonite is crushed until smooth, then sifted with a 100 mesh sieve. Clean bentonite samples are stored in the desiccator.

Bentonite Activation

A total of 50 grams of 100 mesh bentonite was immersed in 200 mL of 1.0 M HCl that stirred for 1 hour at a speed of 200 rpm then filtered and washed with distilled water. The residue obtained is heated (Temperature=200°C, time=60 minutes). After drying, it is crushed and sifted with a 100 mesh sieve. Activated bentonites are stored in the desiccator and ready to be used for the next process.

Determination of total N-content in Palm Oil Mill wastewater

Determination of total N-level refers to the workings of JIS [K 0102-45.2.2002). Making the standard N-total solution was carried out by diluting the induction nitrogen solution 100 mg N / L to 0.2 mg N/L, 0.4 mg N/L; 0.8 mg N/L; 1.2 mg N/L; and 2.0 mg N/L. Then measured by a UV Vis spectrophotometer with a wavelength of 220 nm.

Data Analysis and Hypothesis

The method used in data analysis in the study of the determination of total N-organic matter content and its absorption test with bentonite were as follows: Total N-analysis was carried out using UV-vis spectrophotometry. Determination of total N-levels is known based on the standard curve, namely by plotting the absorbance value of the sample against the concentration of work or by using a straight-line equation below:

$$Y = ax + b$$

Note:

Y = Absorbance a = slope

b = intercept

X = Concentration

The total N-level in the sample is determined using the calibration curve method with the substitution of the Y value (absorbance) obtained from the absorbance measurement of the regression line equation from the

calibration curve. So that the levels of N, P, and K can be determined by substituting the value of X in the following equation:

$$\text{Sorption efficiency} = \frac{(C_0 - C_e)}{C_0} \times 100\%$$

Where, qe (mg/g) is the equilibrium adsorption capacity of the sorbent; C₀ (mg/L) and C_e (mg/L) are the nitrogen concentrations at initial and equilibrium states, respectively; V (L) is the solution volume, and W (g) is the mass of sorbent.

2. Results and discussions

Bentonite is chemically activated by using HCl. The activation process functions to exchange cations in bentonite pores with H⁺ ions and to cause dealumination (Didi, Makhoukhi, Azzouz, & Villemin, 2009), namely the process of releasing Al³⁺, Fe³⁺, Mg²⁺ from bentonite ions and increase the acidic site of the bentonite itself (Durán, Bueno, Hermosín, Cox, & Gámiz, 2019). This acid site is a site that functions as the active side of bentonite. With increasing acid sites, it also increases the activity of bentonite. Addition of HCl too can clean the pore, remove impurities and rearrange the location of the exchanged ions. Ion exchange occurs from mineral salts (Ca²⁺ and Mg²⁺) in the interlayer layer of bentonite with H⁺ ions from acids, then followed by dissolving Al³⁺ and other metal ions such as Fe³⁺ from bentonite lattice layers (Fig. 1). The process of releasing Al from bentonite is presented in the following equation

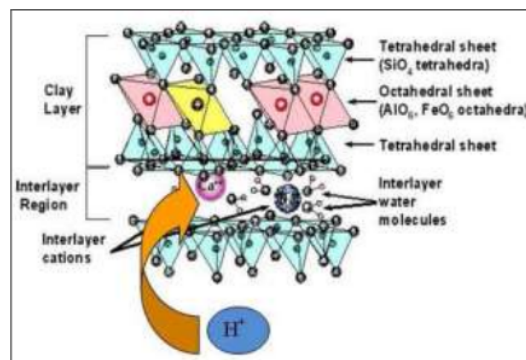



Fig 1: Bentonite reaction of HCl activation

Determination of total N-content in Palm Oil Mill wastewater

Total nitrogen (N-total) is the total or total amount of nitrogen contained in waste water or samples, surface water and others. The standard calibration curve is made from a standard Nitrogen solution with a concentration of 0.2; 0.4; 0.8; 1.2; and 2.0 mg N/L. Then the absorbance was measured by UV-vis spectrophotometry at a wavelength of 220 nm (Table 1)

Table 1: Absorbance of the Nitrogen standard

Concentration	Absorbance
0.2	0.217
0.4	0.355
0.8	0.646
1.2	0.921
1.4	1.416

The standard solution curve is made with the x-axis

concentration and absorbance y-axis, then the regression equation $y = 0.6684x + 0.0961$, with the price of $R^2 = 0.9986$. The absorbance produced is directly proportional to the concentration of the standard solution, namely the greater the concentration used, the greater the absorbance. This is in accordance with the law of Lambert-Beer, namely $A = a.b.c$, where the value of absorbance (A) is directly proportional to the value of concentration (C)

Table 2: Nitrogen in Palm Oil Mill

Sample	Absorbance	Kons (Mg/L)	FP	Result (Mg/L)
Blanko	0.089	-0.010	1.0	-0.010
Wastewater in Anaerobic pond	0.806	1.061	100.0	106
Wastewater in Anaerobic pond	0.933	1.341	10.0	13.4

The results of the analysis in table 4 show that palm oil mill wastewater contains nitrogenous organic matter. Based on the Decree of the State Minister of Environment No. 51 of 1995.

Absorption of Bentonite against N-Total in Palm Oil Mill Waste Water

Determination of absorption of bentonite against N-total was carried out with a mass of 1 gram bentonite and 90 minutes contact time

Table 3: N-Total analysis after adsorption

Organic Matter	Natural Bentonite	Activated Bentonite
N	19.7	18.6
Efficiency	81%	82%

It is shown that bentonite activated using HCl has a greater adsorption capacity than natural bentonite. The use of HCl as an activator affects absorption because the mineral acid can dissolve the components of SiO_2 and Al_2O_3 which fill the adsorbent pores. This resulted in the opening of closed pores so as to increase the surface area of the adsorbent. Activation of bentonite using acid also produces bentonite with larger active sites and greater surface similarity, resulting in higher bentonite yields than before activation (Al-asheh, Banat, & Abu-aitah, 2003) ^{12,31}.

Nitrogen in excess conditions is one of the pollutant parameters of the waters because it can reduce dissolved oxygen concentration through the process of nitrification and endanger the life of aquatic biota due to ammonia toxicity. Nitrogen in water can be found in the form of ammonia (NH_3), ammonium (NH_4), nitrite (NO_2), nitrate (NO_3), and molecular nitrogen (N_2) in the form of gas (Sawyer, 2003). In conditions in the field, the compounds of nitrogen naturally occur in wastewater. For example organic nitrogen in the waters comes from nitrogen fixation and the decay process of dead living things. Ammonia comes from the hydrolysis of organic nitrogen, decay of organic material, and metabolic waste from aquatic biota.

3. Conclusion

Rubber factory wastewater in anaerobic ponds contains Nitrogen 106 mg / L, and at the aerobic pond 13 mg / L. Bentonite has an impact on palm oil mill wastewater. The effectiveness of absorption of bentonite on the Nitrogen element found in palm oil mill wastewater is 82%

4. References

- Ahn Y. Sustainable nitrogen elimination biotechnologies: A review. *Process Biochemistry*. 2006; 41(16):1709-1721. <https://doi.org/10.1016/j.procbio.2006.03.033>
- Al-asheh S, Banat F, Abu-aitah L. Adsorption of phenol using different types of activated bentonites. *Separation and Purification Technology*. 2003; 33:1-10.
- Chai H, Xiang Y, Chen R, Shao Z, Gu L, Li L, He Q. Enhanced simultaneous nitrification and denitrification in treating low carbon-to-nitrogen ratio wastewater: treatment performance and nitrogen removal pathway. *Bioresource Technology*. 2019; 280:51-58. <https://doi.org/10.1016/j.biortech.2019.02.022>
- Conley DJ, Paerl HW, Howarth RW, Boesch DF, Seitzinger SP, et al. Controlling Eutrophication: Nitrogen and Phosphorus. In *Policy Forum Ecology*, 2009, 323.
- Didi MA, Makhoukhi B, Azzouz A, Villemin D. Applied Clay Science Colza oil bleaching through optimized acid activation of bentonite. A comparative study. *Applied Clay Science*. 2009; 42(3-4):336-344. <https://doi.org/10.1016/j.clay.2008.03.014>
- Durán E, Bueno S, Hermosín MC, Cox L, Gámiz B. Science of the Total Environment Optimizing a low added value bentonite as adsorbent material to remove pesticides from water. *Science of the Total Environment*. 2019; 672:743-751. <https://doi.org/10.1016/j.scitotenv.2019.04.014>
- Hord NG, Tang Y, Bryan NS. Food sources of nitrates and nitrites: the physiologic context for. *The American Journal of Clinical Nutrition*. 2009; 90(1):1-10. <https://doi.org/10.3945/ajcn.2008.27131>
- Karri RR, Sahu JN, Chimmiri V. Critical review of abatement of ammonia from wastewater. *Journal of Molecular Liquid*. 2018; 261 (2017), #pagerange#. <https://doi.org/10.1016/j.molliq.2018.03.120>
- Li W, Pauluhn J. Comparative assessment of the sensory irritation potency in mice and rats nose-only exposed to ammonia in dry and humidified atmospheres. *Toxicology*. 2010; 276(2):135-142. <https://doi.org/10.1016/j.tox.2010.07.020>
- Naswir M. The Ability Of Aluminium Sulfate ($\text{Al}_2(\text{SO}_4)_3 \cdot 18\text{H}_2\text{O}$) For Reduction Of Color, Iron (Fe) And Organic Substances Contained In The Peat Water. *ASIO Jpurnal of Analytical Chemistry*. 2015; 1(1):20-28.

11. Naswir M. Study the Effectiveness of Waste Management in Wwtp Palm Oil Factory in Order Anticipation of Environmental Pollution (Case Study Wwtp Palm Oil Factory DMP Company). 2016; 10(2):60–67. <https://doi.org/10.9790/2402-10226067>
12. Naswir M, Arita S, Jumaida P, Lince DM. Tasmin The development of nanotechnology bentonite as adsorbent of metal Cadmium (Cd). International Conference on Science and Technology. 2018; 1116(042026):1-9. <https://doi.org/10.1088/1742-6596/1116/4/042026>
13. Naswir M, Arita S, Marsi Salni. Characterization of Bentonite by XRD and SEM-EDS and Use to Increase PH and Color Removal, Fe and Organic Substances in Peat Water. Journal of Clean Energy Technologies. 2013; 1(4):313-317. <https://doi.org/10.7763/jocet.2013.v1.71>
14. Naswir M, Arita S, Marsi Sani. Activation of Bentonite and Application for Reduction pH, Color, Organic Substance, and Iron (Fe) in the Peat Water. Science Journal of Chemistry. 2014; 1(5):74. <https://doi.org/10.11648/j.sjc.20130105.14>
15. Naswir M, Arita Salni S. The regional of water quality distribution of peat swamp lowland in jambi *). Proceedings International Workshop on Sustainable Management of Lowland for Rice Production, 2013, 337-350.
16. Naswir M, Arita Sani S. Treatment of Peat Water Using Local Raw Material Formulations of Jambi, Indonesia. Asian Journal of Chemistry. 2011; 5(1):43-46. <https://doi.org/10.3153/jfscm.2011005>
17. Rivett MO, Buss SR, Morgan P, Smith JWN, Bemment CD. Nitrate attenuation in groundwater : A review of biogeochemical controlling processes. Water Research. 2008; 42(16):4215-4232. <https://doi.org/10.1016/j.watres.2008.07.020>
18. Vincenzo F, Belfiore F, Maiolino R, Matteucci F, Ventura P. Nitrogen and oxygen abundances in the Local Universe. Monthly notice of the royal astronomical society. 2016; 458(4):3466–3477. <https://doi.org/10.1093/mnras/stw532>
19. Watson EB, Cherniak DJ, Drexler M, Hervig RL, Schaller MF. Nitrogen diffusion in silicate minerals, with implications for nitrogen transport and cycling in the lithosphere. Chemical Geology. 2019; 516:42-58. <https://doi.org/10.1016/j.chemgeo.2019.04.006>
20. Wibowo YG, Naswir M. A Review of Biochar as a Low - cost Adsorbent for Acid Mine Drainage Treatment. Prosiding Seminar Nasional Hari Air Dunia, 2019, 1-10.
21. Wibowo YG, Rosarina D, Fardillah F, Gusva DW. An Overview ; Wastewater Treatment Using Biochar to Reduce Heavy Metals. Prosiding Seminar Nasional Hari Air Dunia, 2019, 11-16.
22. Wibowo YG, Sadikin A. Biology in the 21st-Century: Transformation in biology science and education in supporting the sustainable development goals. Jurnal Pendidikan Biologi Indonesia. 2019; 5:2: <https://doi.org/10.22219/jpbi.v5i2.7956>
23. Winarno H, Muhammad D, Ashyar R, Wibowo YG. Pemanfaatan Limbah Fly Ash dan Bottom Ash dari PLT SUMSEL-5 Sebagai Bahan Utama Pembuatan Paving Block. Jurnal Teknika. 2019; 11(1):1067-1070.
24. Yang X, Wu X, Hao H, He Z. Mechanisms and assessment of water eutrophication. Journal of Zhejiang University SCIENCE B. 2008; 9(705824):197-209. <https://doi.org/10.1631/jzus.B0710626>

utilisation bentonit

ORIGINALITY REPORT

31 %

SIMILARITY INDEX

15 %

INTERNET SOURCES

24 %

PUBLICATIONS

7 %

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

16%

★ Muhammad Naswir, Susila Arita, Widi Hartati, Lusi Septiarini, Desfaournatalia Desfaournatalia, Yudha Gusti Wibowo. "Activated Bentonite: Low Cost Adsorbent to Reduce Phosphor in Waste Palm Oil", International Journal of Chemistry, 2019

Publication

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On