

Path Loss Prediction Accuracy Based on Random Forest Algorithm in Palembang City Area

by Sukemi Sukemi

Submission date: 12-Apr-2023 02:27PM (UTC+0700)

Submission ID: 2062359256

File name: Jurnal_JNTE_1.pdf (466.69K)

Word count: 5080

Character count: 25932



38

Path Loss Prediction Accuracy Based on Random Forest Algorithm in Palembang City Area

Sukemi Sukemi¹, Ahmad Fali Oklilas^{1,2}, Muhammad Wahyu Fadli^{1,2}, Bengawan Alfaresi³

¹ Department of Computer Systems Universitas Sriwijaya, Palembang, 30139, Indonesia

² Electronic and Digital Systems Laboratory of The Faculty of Computer Science Universitas Sriwijaya, Palembang, 30139, Indonesia

³ Department of Electrical Engineering Universitas Muhammadiyah Palembang, Palembang, 30263, Indonesia

ARTICLE INFORMATION

Received: September 29, 2022

Revised: December 21, 2022

Available online: March 31, 2023

KEYWORDS

Path Loss, Prediction, Drive test, Random Forest, Accuracy

CORRESPONDENCE

Phone: +6287897194307

E-mail: sukemi@ilkom.unsri.ac.id

ABSTRACT

Path loss is a mechanism where the signal from the transmitting antenna to the receiver in a wireless network is attenuated during transmission across a medium due to external field conditions. In the telecommunication design, precise and efficient calculations are required. Random forest, as a machine learning-based path loss prediction model is used in this study. Machine learning-based path loss prediction, random forest, has a low level of complexity and a high level of predictability. The data was collected using the drive test method at the Trans Musi busway area on the 4G network in Palembang, South Sumatra, Indonesia. The data ratio comprised 20% of the testing set and 80% of the training set. As a result, it was obtained that the prediction accuracy of 9.24% of mean absolute percentage error (MAPE) and root mean square error (RMSE) was 13.6 decibels (dB). Using hyperparameter tuning for random forest results in optimizing the model used, resulting in accuracy prediction for 8.00% of MAPE and RMSE was 11.8 dB, which is better than the previous results.

INTRODUCTION

The development of communication in a network is something essential. Communication devices are used by individuals or groups that are capable to communicate with others. Commonly, there is the phenomenon of path loss in wireless communication. Path loss is the attenuation (power decrease) as it propagates through the medium from the transmitting antenna (TX) to the receiver (RX) [1]. Additionally, it relies on the environment in which the network is deployed [2]. Path loss is caused by the three main factors, which are reflected, diffracted, and randomly scattered [3]. Other factors can be determined by path loss such as the distance between buildings, the road width, etc. [4], [5].

In the design of telecommunication, it is needed to model path loss. This is due to the path loss prediction model's importance as a tool for radio coverage calculation, base station position determination, frequency allocation, and interference feasibility studies during network development [6]. The empirical models and deterministic models are the two general models commonly used [7]. The empirical model is known as a model based on measurement and statistical analysis. On the other hand, a deterministic model is known as a model which applies propagation mechanisms and analytical techniques for electromagnetic computational modeling [8]. However, models

have drawbacks, the empirical model has not obtained good accuracy results in its measurement, while the deterministic model requires high computational and complexity [9], [10]. In this study, we will calculate and evaluate the used path loss model to see how accurate the prediction is with using machine learning-based path loss prediction. Machine learning is a subset of artificial intelligence (AI) that is self - a learning computer process that does not require explicit programming [11].

A recent study [12] showed that path loss models based on machine learning provide more accuracy than empirical models and are even more computationally efficient than deterministic ones. In the study [8], path loss modeling was carried out in the cabin due to the network signal instability which caused the connection speed to be slow and the communication area was not covered properly. In this aircraft cabin, several machine learning-based path loss predictions outperformed one of the empirical models used, namely the long-distance model. This is demonstrated by measuring findings from RMSE in the 2.4 GHz frequency band scenario where machine learning methods such as back propagation neural network (BPNN), support vector regression (SVR), random forest, and AdaBoost are 1.90 decibel (dB), 2.20 dB, 1.76 dB, and 2.12 dB, respectively. While the empirical model used such as the long-distance model is 3.12

13 dB. In the study [5], drive test measurements were carried out in Nigeria based on a marked route in the 1800 Hz frequency band coverage to obtain path loss data. The empirical models such as Hata, Cost-231, ECC-33, and Egli models used and evaluated for path loss prediction, the results show these models failed to get the path loss values at each distance. The use of an Artificial Neural Network (ANN) model that has been evaluated based on the mean absolute error (MAE), MSE, and standard deviation metrics gives the smallest error when compared to the empirical models used. From what is presented, we know that machine learning as a path loss prediction model has very accurate prediction results and more efficient computation.

Machine learning is a framework that makes predictions using large datasets and a flexible model architecture [13]. There are two types of machine learning, i.e., supervised learning and unsupervised learning. Path loss prediction is a problem that uses a supervised learning algorithm since it is a regression problem due to predicting target's numerical value [11]. Supervised learning uses labeled data to study the general behavior between input and output [3], [14], [15]. Based on the previous explanation, this study will use machine learning with the type of supervised learning, Random Forest. On the other hand, the data for this study is obtained through the drive test method at the Trans Musi busway area with corridor 5 on the 4G network in Palembang, South Sumatra, Indonesia. In both rural and urban propagation environments, path loss can be predicted using machine learning approaches [16] and Palembang City is an urban propagation environment. Based on [3], [8], [13] that Random Forest as a machine learning-based path loss prediction performs better than other types of supervised learning algorithm. Error metric indicators such as RMSE and MAPE are used to evaluate the path loss prediction performance [3], [17], [18].

METHODOLOGY

2 Random Forest

Random Forest is an ensemble learning that uses many decision trees [19]. The algorithm works by selecting features naturally based on correlation or any feature selection methodology [13]. Random Forest uses a bagging method that involves extracting numerous bootstrap replicas from the dataset and building multiple decision trees on each replica. Width bootstrap aggregation is to choose a training sample for each tree in which these trees are trained based on that sample [20].

Metrics for Evaluating the Performance Model

Calculating metrics for evaluation is needed to find out how much of a prediction error a model creates. The path loss values obtained from the model prediction will be calculated together with the measured data (actual path loss values). The difference between the measured value and the path loss value predicted by the model is used to calculate. Error metrics such as MAPE and RMSE are used in this study to evaluate the path loss prediction models [20], [21]. The equations for MAPE and RMSE can be expressed as in (1) and (2).

$$MAPE = \frac{1}{N} \sum_{i=1}^N \left| \frac{PL_{actual} - PL_{predicted}}{PL_{actual}} \right| \times 100 \tag{1}$$

$$RMSE = \sqrt{\frac{1}{N} \sum_{i=1}^N (PL_{actual} - PL_{predicted})^2} \tag{2}$$

Where $i = 1, \dots, N$ is the test sample in x , N is the number of the test samples in total, PL_{actual} is the actual value of path loss, and $PL_{predicted}$ is the predicted value of path loss.

Characteristics of Mean Absolute Percentage Error

In Moreno *et al.* [9], that there are four types of interpretation of MAPE according to Lewis to describe the characteristics of MAPE values in predicting as shown in Table 1.

Table 1. Typical MAPE Interpretation

MAPE (%)	Interpretation
Less than 10	Very Accurate Prediction
10 - 20	Good Prediction
20 - 50	Reasonable Prediction
More than 50	Inaccurate Prediction

As shown in Table 1 above, it can be seen that a model's error can be determined by how great the percentage of results from MAPE is obtained, the smaller the percentage of results from MAPE obtained, the accuracy of a model would be better. Meanwhile, the accuracy of a model would be poor if the percentage of MAPE results obtained is higher.

The Origin of Data

In this study, the data was collected by the Trans Musi busway at corridor 5 in Palembang, South Sumatra, Indonesia. The data is numeric with each column's data type being float and integer. Corridor 5 runs from Sultan Mahmud Badaruddin II Airport to Alang-alang Lebar Terminal purposes.

The Equipment for Data Collection

Equipment that permits data collection is required to get path loss data in the field using the drive test measurement method. The equipment required is classified into three: hardware, software, and additional equipment the details of which are shown in Table 2.

Table 2. List of Data Collection Equipment for Measurement

List of Equipment	
Hardware	Laptop Smartphone
Software	Test Mobile System (TEMS) Investigation
	Global Positioning (GPS)
Additional Equipment	Universal Serial Bus (USB)
	Hub Data Cable

The Step of Data Collection

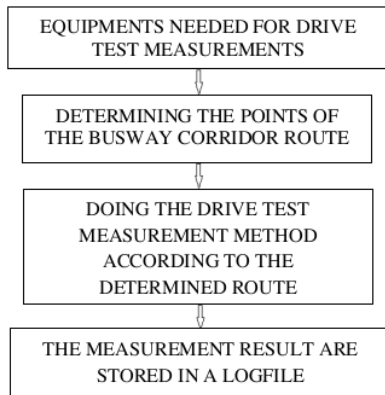


Figure 1. Diagram Block in The Data Collection Step with The Drive Test Measurement Method

As shown in Figure 1 above, this study is using the drive test measurement method for gathering the data. A drive test is a method that involves measuring the complete journey from the departure point to the arrival point. Data collection is in the 4G network area, during path loss data collection on the corridor 5 route, using TEMS Investigation software. It was activated on a laptop that had been connected to a smartphone with turned-on GPS. As previously explained, the route is in corridor 5 of the Trans Musi busway area the starting point is at Sultan Mahmud Badaruddin II Airport and the ending point is at Alang-alang Lebar Terminal can be presented in Figure 2.

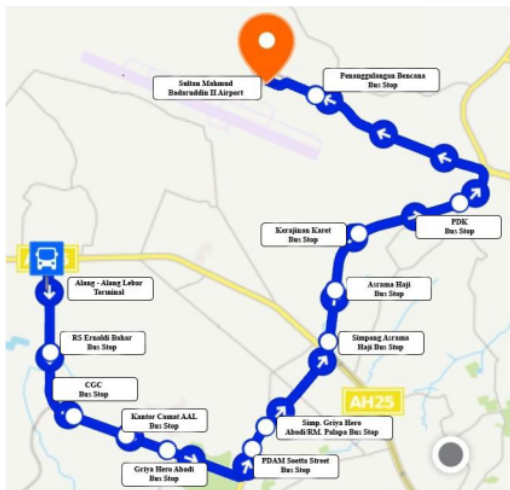


Figure 2. The Selected Route for Data Collection with the Drive Test Method where The Blue Line is The Corridor 5 Route

After collecting data by drive test method, the acquired data is stored in a logfile form. In each route point, we found that the data contains information such as path loss value and related path loss parameters with like building's height, the distance

between buildings, road width, the distance between the transmitter antenna and to the receiver, etc.

Data Information Contained

The logfile contains path loss values and related path loss parameters from the drive test measurement method at a fixed distance between buildings of 3 m and the nearby building height of 10 m as shown in Figure 3.

LTE Serving Cell Distance (m)	Frequency (MHz)	Total_Height_of_TX (m)	Total_Height_of_RX (m)	Vertical Angle RX from Mainbeam TX (α)	Horizontal Angle RX from Mainbeam TX (β)	The road width (m)	PUCCH Path_Loss_AllLogs
614.45	1800	42.3	13.2	0.29	76.34	24.32	111
507.26	1800	42.3	13.2	0.28	76.34	24.32	114
507.26	1800	42.3	13.2	0.28	76.34	24.32	117
507.26	1800	42.3	13.2	0.28	76.34	24.32	117
507.26	1800	42.3	13.2	0.28	76.34	24.32	116
507.26	1800	42.3	13.2	0.28	76.34	24.32	120
507.26	1800	42.3	13.2	0.28	76.34	24.32	118
507.26	1800	42.3	13.2	0.28	76.34	24.32	118
507.26	1800	42.3	13.2	0.28	76.34	24.32	111
614.45	1800	63.5	13.2	0.32	34.49	24.32	121
614.45	1800	63.5	13.2	0.32	34.49	24.32	112
614.45	1800	63.5	13.2	0.32	34.49	24.32	111

Figure 3. Sample of Eleven Measurement Data

As shown in Figure 3, the purple label columns are independent variables and the yellow label column is the dependent variable. The independent variable is a variable that affects the dependent variable. On the other hand, the dependent variable is a variable that is influenced by the independent variable to be predicted. For more details, Table 3 is shown below which columns are included in the input variable as independent variables and the output variable as a dependent variable.

Table 3. Independent and Dependent Variable

Independent Variable	Dependent Variable
LTE Serving Cell Distance (m)	PUCCH Path_Loss All Logs
Frequency (MHz)	
Total_Height_of_TX (m)	
Total_Height_of_RX (m)	
Vertical Angle RX from Mainbeam TX (α)	
Horizontal Angle RX from Mainbeam TX (β)	
The road width (m)	
The nearby buildings height (m)	
The distance between buildings (m)	

The parameters that affect path loss in Table 3, are LTE Serving Cell Distance, Frequency, Transmitter and Receiver Antenna Height, Receiver Vertical and Horizontal Angles from the Transmitter Mainbeam, the road width, the height of the nearby building, and the distance between buildings where they are included as independent variables. Path loss value obtained through field measurements (PUCCH Path_Loss All Logs) is a dependent variable.

Results and Discussion

Relationship between Path Loss and Transmitter Antenna to Receiver Distance



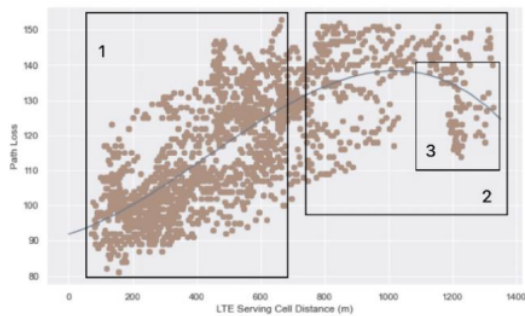


Figure 4. Graph of The Relationship between Path Loss and Transmitter Antenna to Receiver Distance

According to Figure 4, the path loss value is affected by the distance between the transmitting antenna (TX) to the receiver (RX). The path loss tends to increase as the distance between the transmitting antennas (TX) to the receiver (RX) increases. However, it can be seen from the graph, there are a lot of data points that are very close to each other. Likewise, there are quite a lot of data points but they are not too close to each other. Then, we also found data points at the end of which the path loss value at that point is low, even though the path loss will increase as the distance between the transmitting antennas (TX) to the receiver (RX) increases. In this regard, we have not confirmed whether the data points that are quite close to one another are genuinely numerous which are shown through the black box number 1 in Figure 4, or whether the data points that appear to be few are numerous which are shown through the black box number 2 in Figure 4. Furthermore, we have to find out why several data points converge at the end which is shown through the black box number 3 in Figure 4 whose path loss should increase as the distance between the transmitting antennas (TX) to the receiver (RX) increases. The following observations and analyses are shown in Figure 5(a) and Figure 5(b) below.

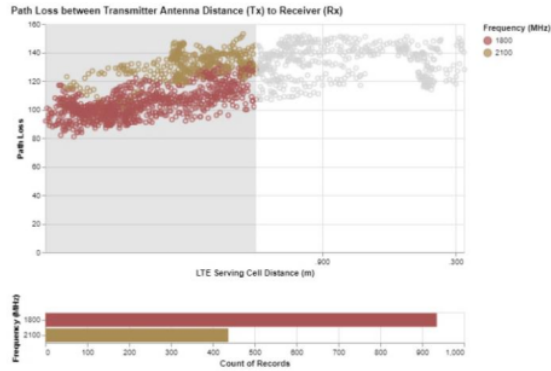

(a)

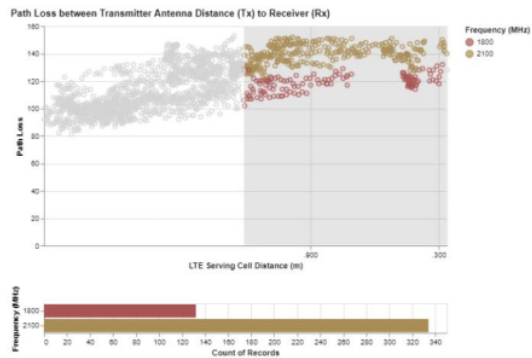

(b)

Figure 5. Graph of The Relationship between Path Loss and The Distance between Transmitter Antenna to Receiver

The path loss at each point of the distance between the transmitting antennas to the receiver consists of two types of frequency bands, using 1800 MHz and 2100 MHz frequency bands (refer to Figure 5 (a) and (b)). In Figure 5 (a), there are a lot of data points close to each other, and it is evident that there is more path loss in the 1800 MHz frequency than path loss in the 2100 MHz frequency band. On the other hand, there are data points in Figure 5 (b) that are not too near to one other, it indicates that there is more path loss in the 2100 MHz frequency band than path loss in the 1800 MHz frequency band in that range. In addition, Figure 5 (b) shows that there is a path loss in the 1800 MHz frequency band at the end where there are data points that are close to each other, which is a form of a question on the black box number 3 in Figure 4.

Feature Selection

To obtain good and accurate results in predicting, it is needed to choose the best features from the independent variables to the dependent variable. In this study, a heatmap is used to see the correlation between the independent and dependent variables. The correlation score between each independent variable and the dependent variables is shown in Table 4.


Table 4. The Correlation Score of The Independent Variable on the Dependent Variable

	PUCCH Path Loss_All Logs
LTE Serving Cell Distance	0.7
Frequency	0.81
Total Heigh of TX	0.25
Total Heigh of RX	0.057
Vertical Angle RX from Mainbeam TX	0.012
Horizontal Angle RX from Mainbeam TX	0.02
The Road Width	-0.16
The Nearby Buildings Height	0.16


Based on Table 4 above, the dependent variable (PUCCH Path Loss_All Logs) shows a very strong correlation with independent variables such as Long-Term Evolution (LTE) Serving Cell Distance and Frequency. LTE Serving Cell Distance gets a correlation score of 0.7 and Frequency gets a correlation score of 0.81. We determine the correlation score through a graphical method called Heatmap. The heatmap will display the attributes score for each class (variables) in a two-way matrix. In short, the similarity of a pattern at the same time is what determines the correlation value. The high correlation score does not necessarily have a causal relationship. From Table 4 above, both LTE Serving Cell Distance and Frequency have a high correlation with PUCCH Path Loss_All Logs. LTE Serving Cell Distance is the distance between the transmitter antennas with the receiver which proves that the greater the distance between the two, the greater the path loss would be obtained due to factors such as more obstacles. From those, we can indicate that both variables have a causal relationship. Frequency and PUCCH Path Loss_All Logs have a strong correlation but they do not have a causal relationship. It was discovered that there were two types of frequency bands, they are 1800 MHz and 2100 MHz. Based on the data, it shows that the path loss values at each location along the busway corridor are under the two types of frequency bands, they are 1800 MHz and 2100 MHz which are only categorized and there is no causal relationship with path loss. Through this causal analysis, we would train a random forest algorithm to make it a trained model for predicting path losses by using the LTE Serving Cell Distance variable as an input variable.

Path Loss Prediction Model Performance

The performance of a machine learning-based path loss model, random forest, using the corridor 5 route dataset which was divided into 20% for the test dataset and 80% for the training dataset. The corridor 5 busway was split into training data to train the model and test data is used to determine whether the built model is already correct or not. The results can be presented in Figure 6.

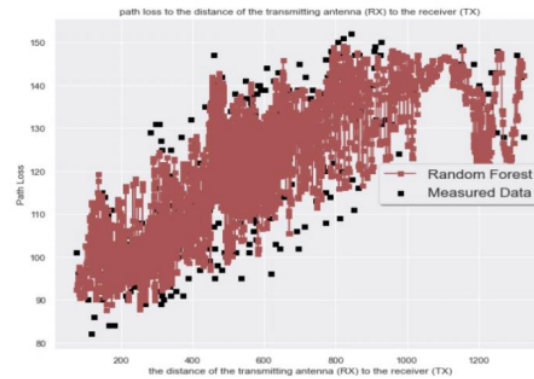

(a)

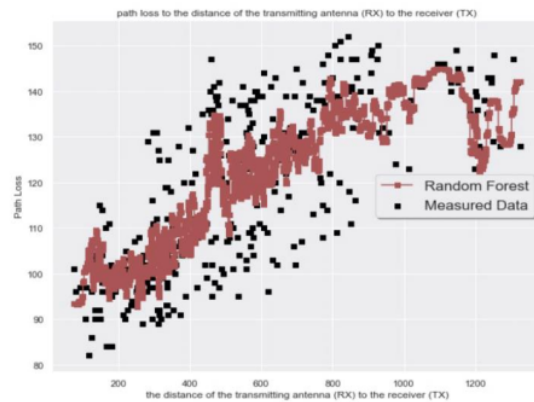

(b)

Figure 6. Path Loss Prediction Performance using Random Forest (a) Without Hyperparameter Tuning, and (b) with Hyperparameter Tuning

Figure 6(a) shows the predictive performance of the random forest model as a predictor using 20% of the test dataset and 80% of training dataset, which is 9.34% MAPE and 13.6 dB RMSE. Based on the prediction performance of the model, the optimization of the predictive model is currently being used by tuning the hyperparameters as shown in Figure 6(b). In Figure 6(b), hyperparameter tuning is used in the Random Forest algorithm where a specific set of parameter values is entered before the learning process of a model begins. We use a library called RandomisedSearchCV to tune the hyperparameters which using this library will look for the best values from a set of parameters. Once the optimal value has been obtained, all that is left to do is insert the value into each parameter. As the results, this study gets prediction accuracy results with 8.00% MAPE and 11.8 dB RMSE.

Model Prediction Accuracy Results

Based on the prediction performance that has been obtained, the prediction accuracy results will be listed in Table 5.

Table 5. Prediction Accuracy Results

Metric	Without Hyperparameter Tuning	With Hyperparameter Tuning
MAPE (%)	9.34	8.00
RMSE (dB)	13.6	11.8

Table 5 shows the accuracy results for each metric before and after hyperparameter tuning have a significant result. The MAPE obtained was 9.34% previously, then after hyperparameter tuning the MAPE value obtained at 8.00%. Based on the MAPE interpretation according to Lewis in Table 1, prediction models like Random Forest are included in the category of model interpretation with very accurate prediction because the MAPE results are less than 10%. The previous RMSE result was 13.6 dB, but the value after tuning the hyperparameter is 11.8 dB, which indicates that the model has been improved.

CONCLUSIONS

From this study, it can be concluded that Random Forest as a supervised machine learning algorithm in predicting path loss can be proposed. As a result, the RMSE even though hyperparameter tuning has not been carried out on the model, the result is still good. Before the hyperparameter tuning, the MAPE and RMSE obtained were 9.34% and 13.6 dB, respectively. Then, the MAPE and RMSE become 8.00% and 11.8 dB which indicates the optimization of the model after hyperparameter tuning. Through the graph of the relationship between the path loss and the distance between the transmitter antenna (TX) to the receiver (RX) that each data points are in the 1800 MHz and 2100 MHz frequency bands. Additionally, the type of frequency bands followed by the increasing distance between the transmitter antennas (TX) to the receiver (RX) affects the path loss value obtained.

As for further study, Exploratory Data Analysis (EDA) is crucial and should be improved on the data used so that when used to predict path loss with the proposed method, it is believed to be even better. Furthermore, it is also required to compare the performance of various models of machine learning-based path loss prediction models to determine which predictor for predictive path loss has the highest level of prediction accuracy.

ACKNOWLEDGMENT

We would like to acknowledge our gratitude to our late colleague Mr. Reza Firsandaya Malik for his guidance and advice and finally, we made this paperwork possible. He was also part of the research team before this paper was written and contributed a lot.

REFERENCES

- [1] S. I. Popoola *et al.*, "Determination of neural network parameters for path loss prediction in very high frequency wireless channel," *IEEE Access*, vol. 7, pp. 150462–150483, 2019, doi: 10.1109/ACCESS.2019.2947009.
- [2] M. Cheffena and M. Mohamed, "Empirical Path Loss Models for Wireless Sensor Network Deployment in Snowy Environments," *IEEE Antennas Wirel. Propag. Lett.*, vol. 16, pp. 2877–2880, 2017, doi: 10.1109/LAWP.2017.2751079.
- [3] Y. Zhang, J. Wen, G. Yang, Z. He, and J. Wang, "Path loss prediction based on machine learning: Principle, method, and data expansion," *Appl. Sci.*, vol. 9, no. 9, 2019, doi: 10.3390/app9091908.
- [4] N. Faruk *et al.*, "Path Loss Predictions in the VHF and UHF Bands within Urban Environments: Experimental Investigation of Empirical, Heuristics and Geospatial Models," *IEEE Access*, vol. 7, pp. 77293–77307, 2019, doi: 10.1109/ACCESS.2019.2921411.
- [5] S. I. Popoola, E. Adetiba, A. A. Atayero, N. Faruk, and C. T. Calafate, "Optimal model for path loss predictions using feed-forward neural networks," *Cogent Eng.*, vol. 5, no. 1, 2018, doi: 10.1080/23311916.2018.1444345.
- [6] S. I. Popoola, J. A. Badejo, U. B. Iyekiopo, S. O. Ojewande, and A. A. Atayero, "Statistical evaluation of quality of service offered by GSM network operators in Nigeria," *Lect. Notes Eng. Comput. Sci.*, vol. 1, no. October, pp. 69–73, 2017.
- [7] H. Cheng, S. Ma, and H. Lee, "CNN-Based mmWave Path Loss Modeling for Fixed Wireless Access in Suburban Scenarios," *IEEE Antennas Wirel. Propag. Lett.*, vol. 19, no. 10, pp. 1694–1698, 2020, doi: 10.1109/LAWP.2020.3014314.
- [8] J. Wen, Y. Zhang, G. Yang, Z. He, and W. Zhang, "Path Loss Prediction Based on Machine Learning Methods for Aircraft Cabin Environments," *IEEE Access*, vol. 7, pp. 159251–159261, 2019, doi: 10.1109/ACCESS.2019.2950634.
- [9] M. Ayadi, A. Ben Zineb, and S. Tabbane, "A UHF Path Loss Model Using Learning Machine for Heterogeneous Networks," *IEEE Trans. Antennas Propag.*, vol. 65, no. 7, pp. 3675–3683, 2017, doi: 10.1109/TAP.2017.2705112.
- [10] O. Ahmadien, H. F. Ates, T. Baykas, and B. K. Gunturk, "Predicting Path Loss Distribution of an Area from Satellite Images Using Deep Learning," *IEEE Access*, vol. 8, pp. 64982–64991, 2020, doi: 10.1109/ACCESS.2020.2985929.
- [11] M. Kang and N. J. Jameson, "Machine Learning: Fundamentals," *Progn. Heal. Manag. Electron.*, pp. 85–109, 2018, doi: 10.1002/9781119515326.ch4.
- [12] C. A. Oroza, Z. Zhang, T. Watteyne, and S. D. Glaser, "A Machine-Learning-Based Connectivity Model for Complex Terrain Large-Scale Low-Power Wireless Deployments," *IEEE Trans. Cogn. Commun. Netw.*, vol. 3, no. 4, pp. 576–584, 2017, doi: 10.1109/TCCN.2017.2741468.
- [13] H. Singh, S. Gupta, C. Dhawan, and A. Mishra, "Path Loss Prediction in Smart Campus Environment: Machine Learning-based Approaches," *IEEE Veh. Technol. Conf.*, vol. 2020-May, 2020, doi: 10.1109/VTC2020-Spring48590.2020.9129444.
- [14] F. Jaffar, T. Farid, M. Sajid, Y. Ayaz, S. Member, and M. J. Khan, "Prediction of Drag Force on Vehicles in a Platoon Configuration Using Machine Learning," pp. 201823–201834, 2020, doi: 10.1109/ACCESS.2020.2985929.

- 10.1109/ACCESS.2020.3035318.
- [15] H. Kim, "Machine Learning," in *Design and Optimization for 5G Wireless Communications*, 1st ed., Wiley-IEEE Press, 2020, pp. 151–193.
- [16] M. A. Salman, S. I. Popoola, N. Faruk, A. A. Oloyede, and A. Lukman, "Adaptive Neuro-Fuzzy Model for Path Loss Prediction in the VHF Band," *2017 Int. Conf. Comput. Netw. Informatics*, 2017, doi: 10.1109/ICCNI.2017.8123768.
- [17] M. Steurer, R. J. Hill, and N. Pfeifer, "Metrics for evaluating the performance of machine learning based automated valuation models based automated valuation models," *J. Prop. Res.*, vol. 38, no. 2, pp. 99–129, 2021, doi: 10.1080/09599916.2020.1858937.
- [18] H. A. Obeidat, R. Asif, O. A. Obeidat, N. T. Ali, S. M. R. Jones, and W. S. Shuaieb, "An Indoor Path Loss Prediction Model using Wall Correction Factors for WLAN and 5G Indoor Networks," *Radio Sci.*, vol. 53, no. 4, pp. 544–564, 2018, doi: 10.1002/2018RS006536.
- [19] R. He, Y. Gong, W. Bai, Y. Li, and X. Wang, "Random Forests Based Path Loss Prediction in Mobile Communication Systems," *2020 IEEE 6th Int. Conf. Comput. Commun.*, pp. 1246–1250, 2020, doi: 10.1109/ICCC51575.2020.9344905.
- [20] S. P. Sotiroudis, S. K. Goudos, and K. Siakavara, "Neural Networks and Random Forests: A Comparison Regarding Prediction of Propagation Path Loss for NB-IoT Networks," *2019 8th Int. Conf. Mod. Circuits Syst. Technol. MOCASST 2019*, pp. 1–4, 2019, doi: 10.1109/MOCASST.2019.8741751.
- [21] N. Moraitis, L. Tsiipi, and D. Vouyioukas, "Machine learning-based methods for path loss prediction in urban environment for LTE networks," *Int. Conf. Wirel. Mob. Comput. Netw. Commun.*, vol. 2020-October, 2020, doi: 10.1109/WiMob50308.2020.9253369.

NOMENCLATURE

i	meaning of i is the test sample index
N	meaning of N is the number of the test samples in total
PL_{actual}	meaning of PL_{actual} is the actual value of path loss
$PL_{predicted}$ value	meaning of $PL_{predicted}$ is the predicted value of path loss
m	meaning of m is meter and it is the International Standard (SI) base unit of length
α	meaning of α is the vertical angle
β	meaning of β is the horizontal angle
%	meaning of how big is the result of the average absolute error in percentage
dB	meaning of dB is decibel and it serves as the standard for measuring standard strength

AUTHORS BIOGRAPHY

Sukemi

He is a leader and lecturer in the Department of Computer Systems, Faculty of Computer Science, Universitas Sriwijaya, Palembang, Indonesia. His last education was a Doctoral Program graduate at the University of Indonesia, majoring in Computer Architecture and Digital Signal Processing in 2016. Research in the field of Telecommunications has been carried out by the author since studying at the Bandung Institute of Technology postgraduate program by taking a thesis topic on Voice Signal Compression in Telephone and Facsimile Communications and continued with further studies at the University of Indonesia with the topic of Computer Architecture.

Ahmad Fali Oklilas

He is a lecturer of the Department of Computer Systems and Head of Electronics and Digital Systems Laboratory, Faculty of Computer Science, Universitas Sriwijaya, Palembang, Indonesia. He received the Bachelor of Engineering Degree in Electrical Engineering, Faculty of Engineering from Universitas Sriwijaya, Palembang, Indonesia and the master of Engineering Degree in Electrical Engineering, Faculty of Industrial & Technology from Bandung Institute of Technology, Bandung, Indonesia, in 1998 and 2003. His current research interest are RFID (Radio Frequency Identification), Telecommunication, Sensor Network, Pervasive Computing, and Tracking System.

Muhammad Wahyu Fadli

He just received the Bachelor of Computer Science Degree in Computer Systems, Faculty of Computer Science, Universitas Sriwijaya, Palembang, Indonesia, in 2022.

Bengawan Alfaresi

He is a lecturer of the Electrical Engineering, Faculty of Engineering, Muhammadiyah University of Palembang, Palembang, Indonesia. He received a Bachelor Degree from Telecommunication Engineering Major, Telkom University. He received a Master Degree from Telecommunication Management, Electrical Engineering study program from the University of Indonesia in 2012. He is currently a PhD student in Faculty of Engineering, Universitas Sriwijaya. His research interest are Signal Processing, Telecommunication, Antenna and RF Propagation, Machine Learning and Deep Learning.

Path Loss Prediction Accuracy Based on Random Forest Algorithm in Palembang City Area

ORIGINALITY REPORT

19%

SIMILARITY INDEX

13%

INTERNET SOURCES

15%

PUBLICATIONS

4%

STUDENT PAPERS

PRIMARY SOURCES

1	eprints.uad.ac.id Internet Source	2%
2	www.researchgate.net Internet Source	2%
3	ntnuopen.ntnu.no Internet Source	1%
4	Submitted to Sriwijaya University Student Paper	1%
5	repository.ub.ac.id Internet Source	1%
6	www.mdpi.com Internet Source	1%
7	jnte.ft.unand.ac.id Internet Source	1%
8	bmcmmedinformdecismak.biomedcentral.com Internet Source	1%
9	Submitted to Universiti Teknologi MARA Student Paper	<1%

- | | | |
|----|--|------|
| 10 | Zuriani Mustaffa, Yuhanis Yusof, Siti Sakira Kamaruddin. "Enhanced artificial bee colony for training least squares support vector machines in commodity price forecasting", <i>Journal of Computational Science</i> , 2014
Publication | <1 % |
| 11 | "Computational Science and Its Applications – ICCSA 2020", Springer Science and Business Media LLC, 2020
Publication | <1 % |
| 12 | acikerisim.medipol.edu.tr
Internet Source | <1 % |
| 13 | hdl.handle.net
Internet Source | <1 % |
| 14 | Harsh Singh, Shivam Gupta, Charchit Dhawan, Amrita Mishra. "Path Loss Prediction in Smart Campus Environment: Machine Learning-based Approaches", 2020 IEEE 91st Vehicular Technology Conference (VTC2020-Spring), 2020
Publication | <1 % |
| 15 | "Computational Science and Its Applications – ICCSA 2017", Springer Science and Business Media LLC, 2017
Publication | <1 % |
| 16 | Bengawan Alfaresi, Zainuddin Nawawi, Bhakti Yudho Suprpto. "Prediction of Path Loss | <1 % |

Propagation in Case of Light Rail Transit (LRT) using Machine Learning Approaches", 2021 International Conference on Converging Technology in Electrical and Information Engineering (ICCTEIE), 2021

Publication

17

1library.net

Internet Source

<1 %

18

Submitted to Girne American University

Student Paper

<1 %

19

academic-accelerator.com

Internet Source

<1 %

20

Segun I. Popoola, Aderemi A. Atayero, Oluwafunso A. Popoola. "Comparative assessment of data obtained using empirical models for path loss predictions in a university campus environment", Data in Brief, 2018

Publication

<1 %

21

Stephen Ojo, Agbotiname Imoize, Daniel Alienyi. "Radial basis function neural network path loss prediction model for LTE networks in multitransmitter signal propagation environments", International Journal of Communication Systems, 2020

Publication

<1 %

22

bradscholars.brad.ac.uk

Internet Source

<1 %

23

ikee.lib.auth.gr

Internet Source

<1 %

24

riunet.upv.es

Internet Source

<1 %

25

link.springer.com

Internet Source

<1 %

26

www.science.gov

Internet Source

<1 %

27

"Intelligent Systems Design and Applications",
Springer Science and Business Media LLC,
2018

Publication

<1 %

28

"Inventive Communication and Computational
Technologies", Springer Science and Business
Media LLC, 2020

Publication

<1 %

29

"Recent Trends in Data Science and Soft
Computing", Springer Science and Business
Media LLC, 2019

Publication

<1 %

30

Fiqri Al Faruqi, RD. Kusumanto, Abu Hasan.
"Optimization of Monocrystalline Solar Panels
Using Reflector Scanning Technology", Journal
of Physics: Conference Series, 2019

<1 %

31

Maheswara Rabbani, Angelina Gracia Eddyputri Burhan. "Social Media Advertising: How Do Consumers Respond to Ads on Instagram?", Indonesian Journal of Computer Science, 2023

Publication

<1 %

32

Mohamed Tharwat Waheed, Yasmine Fahmy, Ahmed Khattab. "DeepChannel: Robust Multi-Modal Outdoor Channel model Prediction in LTE Networks using Deep Learning", IEEE Access, 2022

Publication

<1 %

33

Mohd Fazuwan Ahmad Fauzi, Rosdiadee Nordin, Nor Fadzilah Abdullah, Haider A. H. Alobaidy, Mehran Behjati. "Machine Learning-Based Online Coverage Estimator (MLOE): Advancing Mobile Network Planning and Optimization", IEEE Access, 2023

Publication

<1 %

34

Puput Dani Prasetyo Adi, Fransiska Sisilia Mukti, Panggih Nur Adi, Akio Kitagawa et al. "ZigBee and LoRa performances on RF Propagation on the Snow Hills area", 2021 International Conference on Converging Technology in Electrical and Information Engineering (ICCTEIE), 2021

Publication

<1 %

35 Sotirios P. Sotiroudis, Panagiotis Sarigiannidis, Sotirios K. Goudos, Katherine Siakavara. "Fusing Diverse Input Modalities for Path Loss Prediction: A Deep Learning Approach", IEEE Access, 2021
Publication

36 ir.uitm.edu.my
Internet Source

37 www.tdx.cat
Internet Source

38 www.thefreelibrary.com
Internet Source

39 Achraf Cohen, Yazan A. Alqudah. "On the application of generalized linear mixed models for predicting path loss in LTE networks", EURASIP Journal on Advances in Signal Processing, 2023
Publication

40 Bugra Turan, Ali Uyrus, O. Nuri Koc, Emrah Kar, Sinem Coleri. "Machine Learning Aided Path Loss Estimator and Jammer Detector for Heterogeneous Vehicular Networks", 2021 IEEE Global Communications Conference (GLOBECOM), 2021
Publication

41 Elen Riswana Safila Putri, Dian Candra Rini Novitasari, Fajar Setiawan, Abdulloh Hamid,

Dwi Susanto, Muhammad Fahmi. "Prediction of Sea Surface Current Velocity and Direction using Gated Recurrent Unit (GRU)", 2022 IEEE International Conference on Industry 4.0, Artificial Intelligence, and Communications Technology (IAICT), 2022

Publication

42

Guanshu Yang, Yan Zhang, Zunwen He, Jinxiao Wen, Zijie Ji, Yue Li. "Machine-learning-based prediction methods for path loss and delay spread in air-to-ground millimetre-wave channels", IET Microwaves, Antennas & Propagation, 2019

Publication

<1 %

43

Haruna Chiroma, Ponman Nickolas, Nasir Faruk, Emmanuel Alozie et al. "Large scale survey for radio propagation in developing machine learning model for path losses in communication systems", Scientific African, 2023

Publication

<1 %

44

Nazmat T. Surajudeen-Bakinde, Nasir Faruk, Segun I. Popoola, Muhammed A. Salman et al. "Path loss predictions for multi-transmitter radio propagation in VHF bands using Adaptive Neuro-Fuzzy Inference System", Engineering Science and Technology, an International Journal, 2018

Publication

<1 %

45

Hong Cheng, Shengjie Ma, Hyukjoon Lee, Minsung Cho. "Millimeter Wave Path Loss Modeling for 5G Communications Using Deep Learning With Dilated Convolution and Attention", IEEE Access, 2021

Publication

<1 %

46

Jinxiao Wen, Yan Zhang, Guanshu Yang, Zunwen He, Wancheng Zhang. "Path Loss Prediction Based on Machine Learning Methods for Aircraft Cabin Environments", IEEE Access, 2019

Publication

<1 %

47

Mohamed K. Elmezughi, Omran Salih, Thomas J. Afullo, Kevin J. Duffy. "Comparative Analysis of Major Machine-Learning-Based Path Loss Models for Enclosed Indoor Channels", Sensors, 2022

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On