

Syngas Derived

by Nabila Apriyanti

Submission date: 20-Oct-2022 07:18PM (UTC+0700)

Submission ID: 1930508110

File name: SyngasDerived_30990.pdf (668.4K)

Word count: 5685

Character count: 28893

Indexed by

Scopus[®]

5

SYNGAS DERIVED FROM CATALYTIC GASIFICATION OF FINE COAL WASTE USING INDONESIAN POTENTIAL CATALYST**Muhammad Faizal**

Univesitas Sriwijaya, Faculty of Engineering, Chemical Engineering Department, South Sumatra, Indonesia

Nabila Apriant

Univesitas Sriwijaya, Faculty of Engineering, Chemical Engineering Department, South Sumatra, Indonesia, Universitas Sriwijaya, Graduate School, South Sumatra, Indonesia

Muhammad Said

Univesitas Sriwijaya, Faculty of Engineering, Chemical Engineering Department, South Sumatra, Indonesia

Subriyer Nasir

Univesitas Sriwijaya, Faculty of Engineering, Chemical Engineering Department, South Sumatra, Indonesia

Key words: bentonite, fine coal, fixed bed gasifier, producer gas

doi:10.5937/jaes0-30990

Cite article:

Faizal M., Apriant N., Said M., Nasir S. (2021) SYNGAS DERIVED FROM CATALYTIC GASIFICATION OF FINE COAL WASTE USING INDONESIAN POTENTIAL CATALYST, *Journal of Applied Engineering Science*, 19(4), 934 - 941, DOI:10.5937/jaes0-30990

Online access of full paper is available at: www.engineeringscience.rs/browse-issues

SYNGAS DERIVED FROM CATALYTIC GASIFICATION OF FINE COAL WASTE USING INDONESIAN POTENTIAL CATALYST

Muhammad Faizal^{1*}, Nabila Aprianti^{1,2}, Muhammad Said¹, Subriyer Nasir¹

¹Universitas Sriwijaya, Faculty of Engineering, Chemical Engineering Department, South Sumatra, Indonesia

²Universitas Sriwijaya, Graduate School, South Sumatra, Indonesia

Fine coal waste from the coal mining process has not been used as clean energy even though the amount is very abundant in the world. The conversion of fine coal to syngas is a new way to increase the value of fine coal. Syngas composition, gas ratio, gasification efficiency, and heating value of syngas have been determined under various conditions of temperature (550-750 °C) and bentonite catalyst ratio (0-0.25). The results indicate that fine coal is the suitable raw material for the gasification process. The increase in temperature has increased the volume percentage of H₂. At the highest temperature (750 °C), the gas composition consists of 42.6 vol% H₂, 19.1vol% CO, 19.5 vol% CH₄, and 7.9vol% CO₂. The best performance was achieved when the catalyst/feed ratio is 0.25 with the gas composition of 54.3vol% H₂, 26.2vol% CO, 23.8 vol% CH₄, and 3.5vol% CO₂ heating value and gasification efficiency were 19.72 MJ/Nm³ and 72.27% at 750 °C.

Key words: bentonite, fine coal, fixed bed gasifier, producer gas

INTRODUCTION

The increase in world population causes the world's energy demand to increase as well. Currently, 96% of hydrogen and electricity needs are still dominated by fossil energy [1]. Of the several types of energy available, coal is an abundant and cheap fuel. The use of coal accounts for a third of total energy utilization globally, particularly on electricity generation (40%). Based on energy availability, the world's stored coal reserves can supply for 153 years, much longer than petroleum (50.6 years) and natural gas (52.5 years) [2].

Coal mining with a continuous open pit system has produced several by-products, including fine coal. Fine coal measuring <3 mm, which is formed due to the crushing by the unit working on the coal seam during mining operations [3]. Refined coal after cleaning is important in restoring an economically valuable energy source and preventing environmental pollution [4]. Fine coal is produced between 5-10% of the total coal production as a whole. Particulate fine coal, when inhaled, has the potential to cause respiratory diseases and other health problems. Fine coal contains high sulfur, so its use through direct combustion will be harmful to the environment [5]. The coal processing industry (production, transportation, and handling of lumped coal produces millions of fine coal particles during mining operations and is often regarded as waste [6]. This waste has enormous potential to be used as an energy raw material. The utilization of fine coal will not only add value to it but also serves to reduce environmental pollution.

The use of coal has resulted in high carbon dioxide emissions. The world's attention to the worsening environmental condition due to the emission of harmful gas-

es such as CO₂, SO_x, and so on encourages clean coal technology. In the mining industry, fine coal is used as fuel for boilers and power plants to meet the energy and electricity needs of a mining company [7]. Several studies on fine coal are known to convert fine coal into briquettes. Balraj et al. [8] and Manyuchi et al. [9] used fine coal and waste biomass to make briquettes at various mixtures and adhesives ratios.

As far as the research team has studied, the use of fine coal to produce syngas has never been done. Fine coal gasification is a technology that can be applied to increase the use-value of fine coal as a cleaner fuel. Therefore, fine coal is very interesting to study in the conversion process into environmentally friendly syngas. The purpose of this study is to evaluate the syngas produced from the fine coal catalytic gasification process.

MATERIALS AND METHODS

Materials handling

Fine coal is used as materials to feed the gasifier. Fine coal was obtained from open-pit coal mining in Tanjung Enim, South Sumatra, Indonesia. Fine coal was a waste from the coal mining process that has been cleaning. After cleaned and sieved to 0.5 mm, fine coal is ready to be fed into the gasifier [21]. The proximate and ultimate analysis was performed to determine the physical and chemical properties of fine coal.

Bentonite is used as the catalyst for the gasification process. Bentonite was obtained from Sarolangun village, Jambi Province, Indonesia. Bentonite was activated us-

*muhammadfaizal@unsri.ac.id

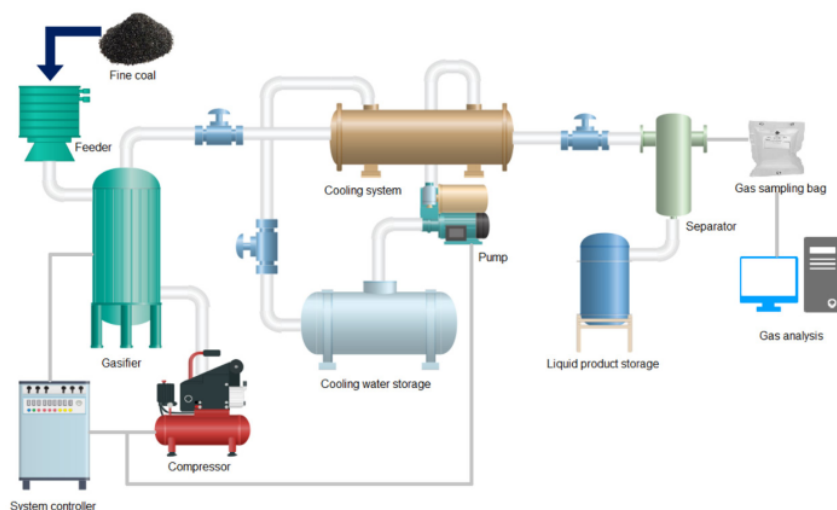


Figure 1: Flow Diagram of Fine Coal Catalytic Gasification

ing thermal activation method by muffle furnace (Thermo scientific thermolyne F48050-33). The chemical composition of natural bentonite was determined using XRF.

Experiments

The fine coal gasification was performed in a modified fixed bed reactor. The gasifier apparatus has been illustrated in Fig. 1 according to the previous work [10]. The equipment consisted of the gasifier with an electrical heater, cooling system, pump, valve, feeding system, sampling port, and control system. For safety, the body of the reactor was insulated by glass wool. The gasifier was made of stainless steel (SS316) with diameter and length of 0.23 m and 0,67 m. The nozzle heater was placed on the reactor wall. Two K-type thermocouples were positioned at the top and bottom of the reactor and connected to the control panel. Before the experiment was begun, fine coal was placed inside the feeding system. To start, the gasifier was set to reach the specified temperature as the independent variable. The temperature was set to 550, 650, and 750 °C of each gasification process in this study. The process took place approximately 30-60 min and was considered as residence time. After the process reached a stable and steady-state condition and the gas temperature has been lowered through the cooling system, sampling was carried out. The producer gas was gathered in a gas sampler bag. The composition of gas was then further analyzed. To evaluate the catalytic effect on fine coal gasification, Bentonite is applied to the gasifier together with fine coal at high temperature (750 °C) with a variation of the catalyst to feed (C/F) ratio of 0, 0.125, and 0.25 and analyzed.

Analysis of producer gas

The gas product was analyzed using Perkin Elmer Clarus 680 Gas Chromatography equipped flame ioniza-

tion detector (FID). He and N₂ were used as the carrier gas. In order to know the quality of the gas product, the heating value of gas was calculated using equation 1-2. According to Tian et al. [11], gasification efficiency is analyzed based on efficiency of cold gas and carbon conversion. Furthermore, the ratio between hydrogen and carbon monoxide and the ratio between combustible and non-combustible gas were evaluated. The heating value (HHV and LHV) of producer gas was determined using the following equation (Eq. 1 and 2) [12]:

$$LHV = ((25.7 \times H_2) + (30 \times CO) + (85.4 \times CH_4)) \times 0.0042 \quad (1)$$

$$HHV = ((30.52 \times H_2) + (30.18 \times CO) + (95 \times CH_4)) \times 0.0041868 \quad (2)$$

HHV and LHV are lower and high heating value (MJ/Nm³); H₂, CO, and CH₄ are percentages of hydrogen, oxidant carbon, and methane (vol%), respectively.

RESULTS AND DISCUSSION

Materials characteristics

Fine coal is coal waste that is mostly used as fuel for steam power plants. Fine coal characteristics have been identified through proximate and ultimate analysis, which refers to the ASTM standard method (Table 1) to facilitate the characteristic analysis, fine coal is compared with raw coal.

Based on the analysis, fine coal as raw research material is included in the 5800 calorie coal criteria. The sulfur content in fine coal was <0.5%, indicating that fine coal is suitable for the gasification process [14]. The carbon content of fine coal was above 60% and considered high [15]. This percentage was not too far from the content of the lump coal. The same thing happened to the volatile matter content, which was lower than raw coal [16].

The percentage of fixed carbon fine coal was lower than raw coal because fine coal was a waste from the coal

Table 1: Fine Coal Characteristics based on Proximate and Ultimate Analysis

Parameter	Standard Method	Fine coal	Raw coal [13]
Total moisture (%)	ASTM D 3302/3302M-17	13.48	3.94
Ash content (%)	ASTM D 3174-12	4.10	1.87
Volatile matter (%)	ASTM D3175-17	41.18	23.26
Fixed carbon (%)	ASTM D 3172-13	41.25	70.93
Total Sulphur (%)	ASTM D 4239-2016	0.42	0.20
HHV (MJ/kg)	ASTM D 5865-2013	28.18	30.64
Carbon (%)	ASTM D5373	64.05	80.66
Hydrogen (%)	ASTM D5373	4.43	4.18
Nitrogen (%)	ASTM D5373	0.90	0.85
Oxygen (%)	ASTM D5373	12.63	20.97

mining process, but it was much higher than biomass such as corn cob, coconut shell, palm kernel shell, palm empty fruit bunch, and others. [17]–[19]. Fixed carbon in a material affects the HHV value of the fuel [20]. Fixed carbon is 40–80% in the range in raw coal, depending on its quality [21]. The ash content of fine coal was <5%, which indicates that fine coal is suitable for the gasification process. High ash can reduce HHV because ash is a non-combustible material. The inorganic energy requirements of forming ash for thermal breakdown and the transition phase are taken from the combustion energy of fine coal and cause reduction in the caloric value [22]. In contrast to raw coal, the ash content of fine coal is higher [23], [24]. The ultimate fine coal analysis results stated that the carbon value reaches 64.05% (as received). Carbon was closely related to heating value. Carbon and hydrogen in fine coal would later contribute to the formation of CO and H₂, which are the main components of synthesis gas.

Bentonite was acted as the catalyst in the gasification process of mined from Sarolangun, Indonesia. The compositional analysis was carried out to find the chemical compositions of bentonite by X-ray fluorescence (XRF) (Table 2). Bentonite consisted of a large number of SiO₂ dan Al₂O₃. The presence of SiO₂, Al₂O₃, Fe₂O₃, and MgO as the dominant components showed their potential to catalyze the gasification process. Based on Qin et al. [25], alkali metals have been shown to influence the gasification process.

Table 2: Chemical composition of natural bentonite by XRF

Chemical composition	Value (%)
SiO ₂	71.12
Al ₂ O ₃	20.77
Fe ₂ O ₃	3.13
MgO	2.12
CaO	1.30
P ₂ O ₅	0.85
K ₂ O	0.32
TiO ₂	0.13

Effect of temperature on producer gas composition and ratio

Temperature is one of the significant parameters in the gasification process. In this study, fine coal gasification was performed at distinct temperatures of 550, 650, and 750 °C. The influence of temperature on the composition and ratio of gases has been studied. An increase in temperature impacts the rise in H₂ but decreases the volume fraction of other gases (CO, CH₄, CO₂), as shown in Fig. 2. The concentration of H₂ reaches 42.6 vol%. Hydrogen increased by 12.4 vol% since the temperature rose to 750 °C, which was previously only 30.2 vol% at 550 °C. The CO concentration has initially been 23% at 550 °C but then decreased with the rise in gasification temperature to 19.1 vol%. Initially, carbon from fine coal reacted with oxygen both from the gasification agent and fine coal (partial oxidation). Then, the partially formed CO reacts with the steam from the pre-drying phase to form CO₂ and H₂.

Methane is a combustible gas found in gasified gas but is not included in the syngas category. At 550 °C, the highest content of CH₄ was achieved at 23.7 vol% by methane formation reaction in the reduction zone. Methane re-reacts with carbon dioxide to form H₂. As the temperature has risen to 750 °C, the CH₄ concentration fell as well as CO₂, which resulted in a significant increase in the H₂ concentration. The reaction is known as dry reforming methane in the reduction zone. The CO₂ content remained in the final gas composition at the highest temperature but has decreased by 4.5 vol% from the initial concentration of 12.4 vol% to 7.9 vol%.

This trend occurs because CO₂ production came from shifting and cracking reactions, which are influenced by water-gas shift reactions and tar cracking. At the same time, the Boudouard reaction consumed most of the CO₂ that has been generated. Furthermore, because the CO₂ production rate is lower than the consumption rate, the CO content decreases with increased gasification temperature. The hydrogen concentration slightly increased with the rise of gasification temperature influenced by the increase in the reaction of water-gas and tar breakdown. The increas-

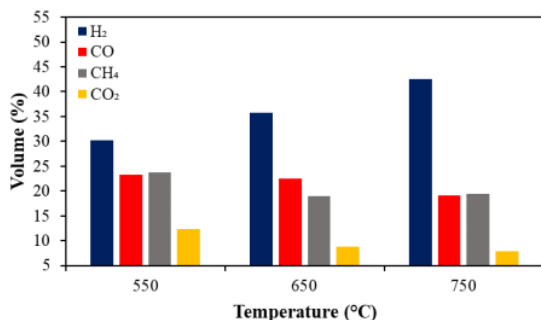


Figure 2: Temperature-influenced Syngas Composition

Increasing gasification temperature encourages the Boudouard and water-gas reactions to increase the CO even more. Hereinafter, rising the temperature in the gasification process also encouraged CH₄ (vapor phase) reaction and reduced CH₄ concentration. Le Chatelier's principle can also explain this trend that the endothermic reaction is suitable for product formation at higher temperatures. Syngas is produced mainly from the char partial oxidation influenced by water-gas and Boudouard reactions.

The H₂/CO ratio of the gas described the use of the gas produced. H₂ and CO concentrations were obtained through the analysis of gas composition in the previous section. Fig. 3 shows the effect of temperature on the H₂/CO and CG/NCG ratio. Both gas ratios have risen along with the increase in gasification temperature. Since the rise on hydrogen was greater than that of carbon monoxide, the ratio of H₂/CO increased by degrees. If the gasification temperature was relatively low, CO₂ tended to be generated through water-gas shift reaction and methanation reaction (exothermic) [26]. For fine coal gasification in this study, the H₂/CO ratio was 1.3-2.23. The production of chemicals such as methanol uses the H₂/CO ratio of 1-2 that fitted this study results.

Fine coal has shown its potential as a fuel to produce syngas with a higher ratio of H₂/CO at 750 °C. This was related to the small diameter of fine coal to have a smoother flow in the reactor. The greater the surface

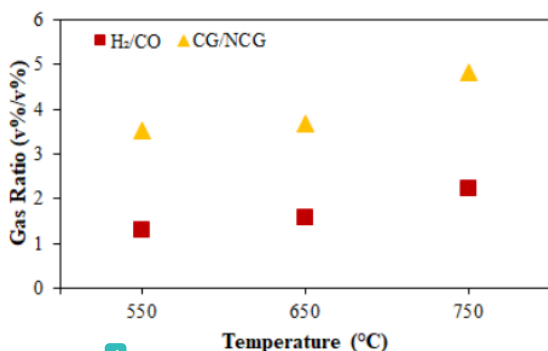


Figure 3: Effect of Temperature on H₂/CO and CG/NCG Ratio

area of the material (fine coal), the more conductive heat transfer increases according to Fourier's Law. According to Madadian et al. [27], the carbon conversion rate can be increased if the conductivity is large due to the larger surface area of the feedstock. The CG/NCG ratio stated the ratio between combustible gas and non-combustible gas. Combustible gas in producer gas consists of CO, H₂, and CH₄, while non-combustible gas consists of CO₂, O₂, and N₂, resulting from gasification agents. As illustrated by Fig. 2, the CG/NCG ratio increased with increasing temperature. A significant result obtained when the temperature raised from 650 °C to 750 °C. The highest CG/NCG ratio achieved was 4.83. Furthermore, higher temperatures have also been able to reduce CO₂ gas so that the ratio is high. This CO₂ reduction occurred according to the dry reforming reaction of methane, evidenced by the decrease in CH₄ concentration when the temperature increases.

Effect of temperature on gasification efficiency and heating value

The effect of gasification temperature on the heating value of syngas illustrated in Fig. 4. The temperature change shows a slight decrease in HHV and LHV of syngas. The HHV and LHV at 550 °C are 16.23 MJ/Nm³ and 14.70 MJ/Nm³. These results are associated with changes in the concentrations of CH₄, H₂, and CO, which are not significant to the temperature where the methane concentration decreases with increasing reaction temperature. These results also confirm that the produced gas can be used as fuel gas for the Fischer-Tropsch synthesis.

LHV and HHV decreased in consequence of the decrease in carbon monoxide and methane concentration from the producer gas. The concentrations of CH₄ and CO have a more generous contribution to the heating value of gas. The system showed good performance in terms of heating value, which can be seen from the slight heat reduction. Cold gas efficiency can be recognized as the ratio of the energy produced by the producer of gas to the calorific value of fine coal. The efficiency of cold gas determined gasification performance. It relied on the LHV of syngas compared to fine coal, which is constant during the gasification process. Gasifier design, raw material,

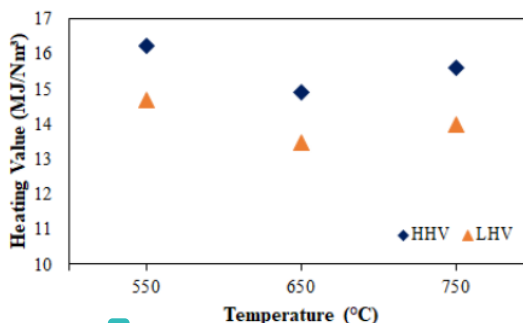


Figure 4: Effect of Temperature on the Heating Value

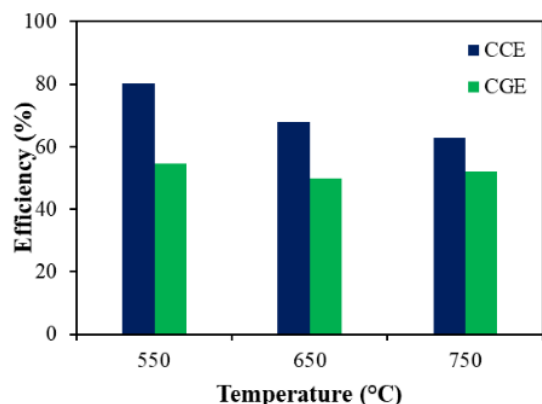


Figure 5: Effect of Temperature on Gasification Efficiency

moisture content are parameters that affect CGE. Fig. 5 illustrates the influence of reaction temperature on CCE and CGE. As observed, CCE and CGE had declined when the temperature raised from 550 to 650 °C, but then increased slightly when the temperature rose to 750 °C because the syngas produced had a higher H₂ content compared to CO and CH₄. At the end of the process, CCE and CGE were 62.81% and 51.90% at 750 °C.

Effect of catalyst on syngas composition

From the previous section, the most influential temperature which made hydrogen continue to increase occurred at 750 °C. Therefore, investigations of the catalyst performance on the syngas were continued at 750 °C. The hydrogen concentration increases as the catalyst to feed ratio (C/F) increases. The highest hydrogen concentration was obtained in increments of 0.25 C/F (54.3% vol). Fig. 6 demonstrates that the leading combustible gases (H₂, CO, and CH₄) were increased by rising the C/F. The CO₂ content was reduced with the higher addition of bentonite.

In the catalytic gasification process of fine coal, the volume percentage of main gasses in gas increased after bentonite is applied. Initially, at the highest temperature, hydrogen was only able to produce 42.6%, but after 0.125 C/F and 0.25 C/F was applied, H₂ concentrations increased to 46.6% and 54.3%. H₂ increased by 11.7 vol% at the same temperature after the bentonite was added. Furthermore, the CO₂ content was successfully reduced from 7.9% to 3.5%. The synergy effect between increasing gasification temperature and bentonite has a positive impact on increasing gas concentration. Bentonite consists mostly of SiO₂ and Al₂O₃. According to Oliveira et al. [28], both compounds have good heat conductivity. Besides, Fe₂O₃ in bentonite can increase the char gasification process [29]. Furthermore, some literature has reported that K₂O, Na₂O, CaO, MgO, and Fe₂O₃ in material play an important role in the catalytic effect during the gasification process. Fe₂O₃ and CaO were active components that have a catalytic impact on the gasification process.

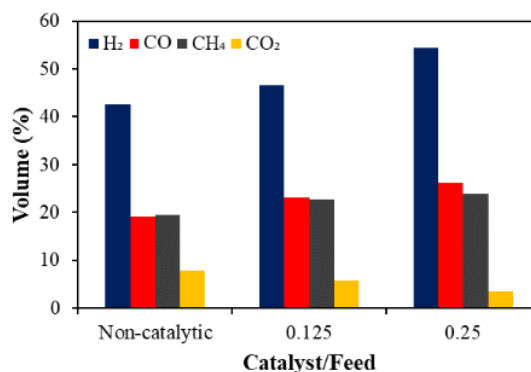


Figure 6: Effect of catalyst on producer gas composition

The H₂/CO ratio described the use of the syngas produced. The different properties of syngas are required for further chemical production. For example, syngas with an H₂/CO ratio of approximately one is necessary to synthesize oxo in aldehyde and alcohol production. The ratio of H₂/CO approach to 2 is required for fuel production, Fischer-Tropsch synthesis, and methanol [30]. In fine coal gasification, both original and catalytic, it has been carried out to determine the H₂/CO ratio (Fig. 6). The highest H₂/CO ratio was obtained in the gasification process without using a catalyst (2.23). After bentonite was applied to increase the main gas concentration, the H₂/CO ratio decreased but remained in number 2. Bentonite provided a stable state to the H₂/CO ratio. Syngas produced through a catalytic process using bentonite is suitable for use as fuel.

The CG/NCG ratio provides an overview of the comparison between combustible gas (CO, H₂, and CH₄) and non-combustible gas (O₂, N₂, and CO₂). It can be seen that by adding a catalyst, the CG/NCG ratio increases significantly (Fig. 7). This is consistent with the composition of the gas that has been analyzed, where the CO₂ concentration continues to decrease with the addition of bentonite. The highest CG/NCG ratio was obtained at 0.25 C/F of 11.46.

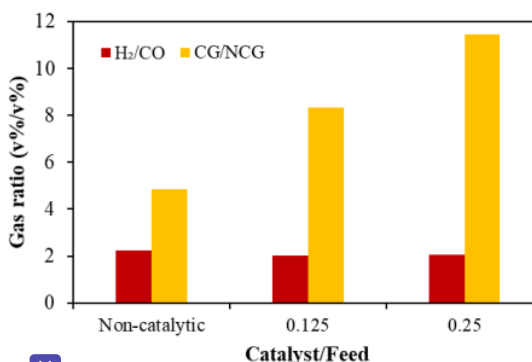


Figure 7: Effect of Catalyst on H₂/CO and CG/NCG Ratio

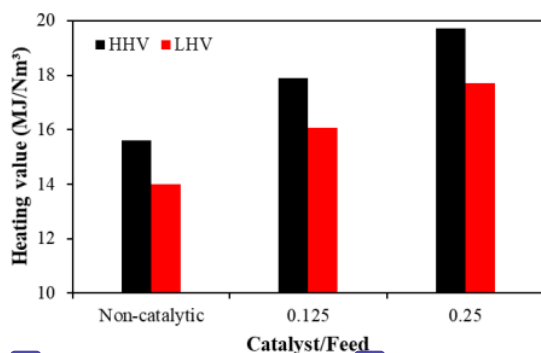


Figure 8: Effect of Catalyst on HHV and LHV of Syngas

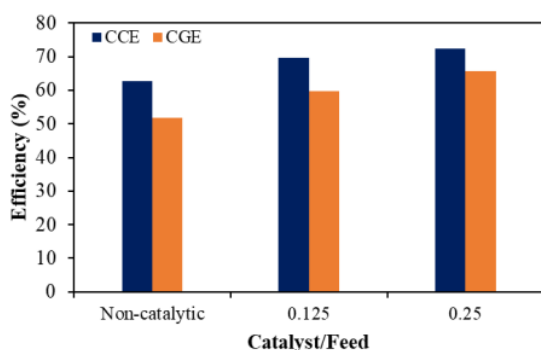


Figure 9: Effect of Catalyst on Gasification Efficiency

Heating value and gasification efficiency of catalytic gasification

The heating values of gasification defined as HHV and LHV are shown in Fig. 8. The highest HHV and LHV were obtained at 19.72 MJ/Nm³ and 17.70 MJ/Nm³ at C/F 0.25. Both HHV and LHV are influenced by the concentration of combustible gases, namely CO, H₂, and CH₄. Because the composition of the three gases continues to increase along with C/F, it impacts increasing the heating value.

There are two parameters used as benchmarks for assessing gasification performance: carbon conversion efficiency (CCE) and cold gas efficiency (CGE). The CCE concisely described the process of converting fine coal into syngas Fig. 9 shows the CCE and CGE of the three gasification processes. The gasification process with a C/F of 0.25 has the highest CCE, which reaches 65.61%, while the lowest CCE is obtained in non-catalytic gasification at 51.90%. Carbon conversion efficiency is influenced by the composition of the gas composed by the carbon content. Carbon dioxide is also included in determining CCE.

Cold gas efficiency (CGE) is the ratio of producer gas energy to raw material energy. The highest CGE was obtained at C/F 0.25 of 65.61%. The increase in the catalyst ratio has increased the CGE. An increase in CGE can be

associated with a decrease in the amount of CO₂ and an increase in the amount of CO and H₂. The content of volatile matter and fixed carbon also influences CGE [31], [32]. Cold gas efficiency followed the LHV trend because it is a major factor affecting the CGE.

CONCLUSION

In this study, catalytic fine coal gasification was investigated in a fixed bed gasifier using natural bentonite as a catalyst. The temperature has a positive effect on the gasification process by increasing the percentage volume of the syngas composition particularly in H₂. Hydrogen increased from 30.2 vol% to 42.6 vol% from 550 to 750 °C. Increasing the ratio of bentonite to fine coal (C/F) has succeeded in improving percentage volume of H₂ and CO, gasification performance and reducing CO₂. The best syngas concentration was reached at 0.25 C/F and 750 °C (54.3 vol% H₂, 26.2 vol% CO, 23.8 vol% CH₄, and 3.5 vol% CO₂). The heating value of syngas and gasification efficiency of fine coal are 19.72 MJ/Nm³ and 72.27%.

ACKNOWLEDGEMENTS

The authors are grateful to the Ministry of Education and Culture Republic of Indonesia for research funding support through Pendidikan Magister menuju Doktor untuk Sarjana Unggul (PMDSU) scheme and scholarship (Grant No. 270/SP2H/AMD/LT/PM/2020 and 0222/UN9/SB3.LP2M.PT/2020). The authors thank PT. Pertamina RU III Plaju, Palembang for analysis support.

REFERENCES

- Li, G., Cui, P., Wang, Y., Liu, Z., Zhu, Z., Yang, S. (2020). Life cycle energy consumption and GHG emissions of biomass-to-hydrogen process in comparison with coal-to-hydrogen process. *Energy*, 191, 116588, 191, DOI: 10.1016/j.energy.2019.116588.
- Song, Y., Wang, N. (2019). Exploring temporal and spatial evolution of global coal supply-demand and flow structure. *Energy*, 168, 1073–1080, DOI: 10.1016/j.energy.2018.11.144.
- Lu, Y., Wang, X., Liu, W., Li, E., Cheng, F., Miller, J. D. (2019). Dispersion behavior and attachment of high internal phase water-in-oil emulsion droplets during fine coal flotation. *Fuel*, 253, 273–282, DOI: 10.1016/j.fuel.2019.05.012.
- Sahinoglu, E. (2018). Cleaning of high pyritic sulfur fine coal via flotation, *Advanced Powder Technology*, 29, 7, 1703–1712, DOI: 10.1016/j.appt.2018.04.005.
- Yu, X., Luo, Z., Gan, D. (2019). Desulfurization of high sulfur fine coal using a novel combined beneficiation process. *Fuel*, 254, 115603, DOI: 10.1016/j.fuel.2019.06.011.

6. Adeleke, A. A., Odusote, J. K., Lasode, O. A., Ikubanni, P. P., Malathi, M., Paswan, D. (2019). Densification of coal fines and mildly torrefied biomass into composite fuel using different organic binders. *Heliyon*, 5, 7, 0–6, DOI: 10.1016/j.heliyon.2019.e02160.
7. Dzikuc, M., Kurylo, P., Dudziak, R., Szufa, S., Dzikuc, M., Godzisz, K. (2020). Selected aspects of combustion optimization of coal in power plants. *Energies*, 13, 9, DOI: 10.3390/en13092208.
8. Balraj, A., Krishnan, J., Selvarajan, K., Sukumar, K. (2020). Potential use of biomass and coal-fine waste for making briquette for sustainable energy and environment. *Environmental Science and Pollution Research*, DOI: 10.1007/s11356-020-10312-2.
9. Manyuchi, M. M., Mbohwa, C., Muzenda, E. (2018). Value addition of coal fines and sawdust to briquettes using molasses as a binder. *South African Journal of Chemical Engineering*, 26, 70–73, DOI: 10.1016/j.sajce.2018.09.004.
10. Aprianti, N., Faizal, M., Said, M., Nasir, S. (2020). Valorization of palm empty fruit bunch waste for syngas production through gasification. *Journal of Ecological Engineering*, 21, 7, 17–26, DOI: 10.12911/22998993/125461.
11. Tian, Y., Zhou, X., Lin, S., Ji, X., Bai, J., Xu, M. (2018). Syngas production from air-steam gasification of biomass with natural catalysts. *Science of the Total Environment*, 645, 518–523, DOI: 10.1016/j.scitotenv.2018.07.071.
12. Monir, M. U., Aziz, A. A., Kristanti, R. A., Yousuf, A. (2018). Syngas production from co-gasification of forest residue and charcoal in a pilot scale downdraft reactor, *Waste and Biomass Valorization*, 11, 2, 635–651, DOI: 10.1007/s12649-018-0513-5.
13. Jingna, X., Guanhua, N., Hongchao, X., Shang, L., Qian, S., Kai, D. (2019). The effect of adding surfactant to the treating acid on the chemical properties of an acid-treated coal. *Powder Technology*, 356, 263–272, DOI: 10.1016/j.powtec.2019.08.039.
14. Wang, Y., Tang, Y., Guo, X., Xie, Q., Finkelman, R. B., Li, P., Chen, P. (2019). Fate of potentially hazardous trace elements during the entrained-flow coal gasification processes in China. *Science of the Total Environment*, 668, 854–866, DOI: 10.1016/j.scitotenv.2019.03.076.
15. Guo, X., Tang, Y., Wang, Y., Eble, C. F., Finkelman, R. B., Li, P. (2020). Evaluation of carbon forms and elements composition in coal gasification solid residues and their potential utilization from a view of coal geology. *Waste Management*, 114, 287–298, DOI: 10.1016/j.wasman.2020.06.037.
16. Wang, D., Yang, H., Wu, Y., Zhao, C., Ju, F., Wang, X., Zhang, S., Chen, H. (2020). Evolution of pore structure and fractal characteristics of coal char during coal gasification. *Journal of the Energy Institute*, 93, 5, 1999–2005, DOI: 10.1016/j.joei.2020.04.015.
17. Yahaya, A. Z., Somalu, M. R., Muchtar, A., Sulaiman, S. A., Daud, W. R. W. (2019). Effect of particle size and temperature on gasification performance of coconut and palm kernel shells in downdraft fixed-bed reactor. *Energy*, 175, 931–940, DOI: 10.1016/j.energy.2019.03.138.
18. Weng, Z., Kanchanapit, E., Hantoko, D., Yan, M., Su, H., Zhang, S., Wang, G. (2020). Improving supercritical water gasification of sludge by oil palm empty fruit bunch addition: Promotion of syngas production and heavy metal stabilization. *Chinese Journal of Chemical Engineering*, 28, 1, 293–298, DOI: 10.1016/j.cjche.2019.08.004.
19. Arun, K., Ramanan, M. V., Mohanasutan, S. (2020). Comparative studies and analysis on gasification of coconut shells and corn cobs in a perforated fixed bed downdraft reactor by admitting air through equally spaced conduits. *Biomass Conversion and Biorefinery*, 71, DOI: 10.1007/s13399-020-00872-1.
20. Sanlisoy, A., Melez, H., Carpinlioglu, M. O. (2017). Characteristics of the solid fuels for the plasma gasification. *Energy Procedia*, 141, 282–286, DOI: 10.1016/j.egypro.2017.11.106.
21. Yang, Z., Peng, H., Zhang, Z., Ju, W., Li, G., Li, C. (2019). Atmospheric-variational pressure-saturated water characteristics of medium-high rank coal reservoir based on NMR technology. *Fuel*, 256, 1, 115976, DOI: 10.1016/j.fuel.2019.115976.
22. ÖzyüğÜran, A., Yaman, S. (2017). Prediction of Calorific Value of Biomass from Proximate Analysis. *Energy Procedia*, 107, 130–136, DOI: 10.1016/j.egypro.2016.12.149.
23. Li, Y., Honaker, R., Chen, J., Shen, L. (2016). Effect of particle size on the reverse flotation of subbituminous coal. *Powder Technology*, 301, 323–330, DOI: 10.1016/j.powtec.2016.06.019.
24. Wu, J., Wang, J., Liu, J., Yang, Y., Cheng, J., Wang, Z., Zhou, J., Chen, K. (2017). Moisture removal mechanism of low-rank coal by hydrothermal dewatering: Physicochemical property analysis and DFT calculation. *Fuel*, 187, 242–249, DOI: 10.1016/j.fuel.2016.09.071.
25. Qin, Y., He, Y., Ren, W., Gao, M., Wiltowski, T. (2020). Catalytic effect of alkali metal in biomass ash on the gasification of coal char in CO₂. *Journal of Thermal Analysis and Calorimetry*, 139, 5, 3079–3089, DOI: 10.1007/s10973-019-08719-2.
26. 26. perimental study on hydrogen-rich syngas production via gasification of pine cone particles and wood pellets in a fixed bed downdraft gasifier. *International Journal of Hydrogen Energy*, 44, 32, 17389–17396, DOI: 10.1016/j.ijhydene.2019.02.175.

27. Madadian, E., Orsat, V., Lefsrud, M. (2017). Comparative study of temperature impact on air gasification of various types of biomass in a research-scale down-draft reactor. *Energy and Fuels*, 31, 4, 4045–4053, DOI: 10.1021/acs.energyfuels.6b03489.
28. Oliveira, A. de N. de., Lima, M. A. B. de., Pires, L. H. de O., Silva, M. R. de., Luz, P. T. S. da., Angelica, R. S., Filho, G. N. da R., Costa, C. E. F. da., Luque, R., Nascimento, L. A. S. do. (2019). Bentonites modified with phosphomolybdic heteropolyacid (HPMo) for biowaste to biofuel production. *Materials*, 12, 9, DOI: 10.3390/ma12091431.
29. Shahbaz, M., Yusup, S., Inayat, A., Patrick, D. O., Ammar, M., Pratama, A. (2017). Cleaner Production of hydrogen and syngas from catalytic steam palm kernel shell gasification using CaO sorbent and coal bottom ash as a catalyst. *Energy and Fuels*, 31, 12, 13824–13833, DOI: 10.1021/acs.energyfuels.7b03237.
30. Okolie, J. A., Nanda, S., Dalai, A. K., Berruti, F., Kozinski, J. A. (2020). A review on subcritical and supercritical water gasification of biogenic, polymeric and petroleum wastes to hydrogen-rich synthesis gas," *Renewable and Sustainable Energy Reviews*, 119, 109546, DOI: 10.1016/j.rser.2019.109546.
31. Su, H., Liao, W., Wang, J., Hantoko, D., Zhou, Z., Feng, H., Jiang, J., Yan, Mi. (2020). Assessment of supercritical water gasification of food waste under the background of waste sorting: Influences of plastic waste contents. *International Journal of Hydrogen Energy*, 45, 41, 21138–21147, DOI: 10.1016/j.ijhydene.2020.05.256.
32. Aprianti, N., Faizal, M., Said, M., Nasir, S. (2021). Catalytic gasification of oil palm empty fruit bunch by using Indonesian bentonite as the catalyst. *Journal of Applied Engineering Science*, 1–10, DOI: 10.5937/jaes0-28781.

Paper submitted: 22.02.2021.

Paper accepted: 11.04.2021.

*This is an open access article distributed under the
CC BY 4.0 terms and conditions.*

Syngas Derived

ORIGINALITY REPORT

14%

SIMILARITY INDEX

3%

INTERNET SOURCES

13%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

- 1** Zhmakin Anatolievich, Budnikov Sergeevich. "Research of the possibility of transmission of liquefied natural gas through a pipeline by a non-pressure method", Journal of Applied Engineering Science, 2021
Publication 2%
 - 2** Submitted to Botswana International University of Science and Technology
Student Paper 2%
 - 3** Submitted to Neosho County Community College
Student Paper 1%
 - 4** Muhammad Shahbaz, Tareq Al-Ansari, Muddasser Inayat, Shaharin A. Sulaiman, Prakash Parthasarathy, Gordon McKay. "A critical review on the influence of process parameters in catalytic co-gasification: Current performance and challenges for a future prospectus", Renewable and Sustainable Energy Reviews, 2020
Publication 1%
-

5	data-scindeks.ceon.rs Internet Source	1 %
6	A.A.P. Susastriawan, Harwin Saptodi, Purnomo. "Small-scale downdraft gasifiers for biomass gasification: A review", Renewable and Sustainable Energy Reviews, 2017 Publication	1 %
7	Muhammad Zain Siddiqui, Mahshab Sheraz, Umair Ali Toor, Ali Anus et al. "Recent approaches on the optimization of biomass gasification process parameters for product H ₂ and syngas ratio: a review", Environment, Development and Sustainability, 2022 Publication	1 %
8	Weiming Song, Jianan Zhou, Yujie Li, Jian Yang, Xiang Zhang, Shu Li. "Production of high-quality combustible gas: The green and efficient utilization of inferior dust removal ash and high-temperature flue gas in converters", Journal of Cleaner Production, 2020 Publication	1 %
9	bioresources.cnr.ncsu.edu Internet Source	1 %
10	Ebubekir Siddik Aydin, Ozgun Yucel, Hasan Sadikoglu. "Experimental study on hydrogen-rich syngas production via gasification of pine	<1 %

cone particles and wood pellets in a fixed bed downdraft gasifier", International Journal of Hydrogen Energy, 2019

Publication

11

Ersan Pütün. "Rapid Pyrolysis of Olive Residue. 2. Effect of Catalytic Upgrading of Pyrolysis Vapors in a Two-Stage Fixed-Bed Reactor", Energy & Fuels, 04/16/2009

Publication

12

Muhammad Faizal, Muhammad Said, Enggal Nurisman, Nabila Aprianti. "Purification of Synthetic Gas from Fine Coal Waste Gasification as a Clean Fuel", Journal of Ecological Engineering, 2021

Publication

13

W Suwinarti, R Amirta, Yuliansyah. "Production of high-calorie energy briquettes from bark waste, plastic and oil", IOP Conference Series: Earth and Environmental Science, 2018

Publication

14

Narasimhan Kodanda Ram, Nameirakpam Rajesh Singh, Perumal Raman, Atul Kumar, Priyanka Kaushal. "A detailed experimental analysis of air–steam gasification in a dual fired downdraft biomass gasifier enabling hydrogen enrichment in the producer gas", Energy, 2019

Publication

<1 %

<1 %

<1 %

<1 %

15 André G. Oliveira, Patrícia M. Candreva, Príamo A. Melo, José Carlos Pinto. "Steady - State Behavior of Slurry and Bulk Propylene Polymerization", Polymer Reaction Engineering, 2003 <1 %
Publication

16 Changliang Shi, Gan Cheng, Shengnan Wang. "Optimization of Coal Washery Tailings by Flotation Process", Energies, 2019 <1 %
Publication

17 Mada Triandala Sibero, Yasuhiro Igarashi, Ocky Karna Radjasa, Agus Sabdono, Agus Trianto, Dewi Seswita Zilda, Yusuf Jati Wijaya. "Sponge-associated fungi from a mangrove habitat in Indonesia: species composition, antimicrobial activity, enzyme screening and bioactive profiling", International Aquatic Research, 2019 <1 %
Publication

18 Sabah Mariyam, Muhammad Shahbaz, Tareq Al-Ansari, Hamish. R Mackey, Gordon McKay. "A critical review on co-gasification and co-pyrolysis for gas production", Renewable and Sustainable Energy Reviews, 2022 <1 %
Publication

19 Ahmad Zubair Yahaya, Mahendra Rao Somalu, Andanastuti Muchtar, Shaharin Anwar Sulaiman, Wan Ramli Wan Daud. <1 %

"Effect of particle size and temperature on gasification performance of coconut and palm kernel shells in downdraft fixed-bed reactor",
Energy, 2019

Publication

20

Arie Wahyudi, Hilda Zulkifli, Susila Arita, Rico Sitorus. "Coal Dust Exposure Characteristic and Impact on Respiratory Impairment from Coal Unloading Station in Palembang, South Sumatra, Indonesia", Journal of Ecological Engineering, 2022

Publication

<1 %

21

Chen Guo, Yong Qin, Dongmin Ma, Lingling Lu. "Pore structure response of sedimentary cycle in coal-bearing strata and implications for independent superposed coalbed methane systems", Energy Sources, Part A: Recovery, Utilization, and Environmental Effects, 2020

Publication

<1 %

22

Fengkui Yin, Priscilla Tremain, Jianglong Yu, Elham Doroodchi, Behdad Moghtaderi. "Investigations on the Synergistic Effects of Oxygen and CaO for Biotars Cracking during Biomass Gasification", Energy & Fuels, 2016

Publication

<1 %

23

Hongcai Su, Wenjuan Liao, Jingyi Wang, Dwi Hantoko, Zhihao Zhou, Hongyu Feng, Jiahao

<1 %

Jiang, Mi Yan. "Assessment of supercritical water gasification of food waste under the background of waste sorting: Influences of plastic waste contents", International Journal of Hydrogen Energy, 2020

Publication

24

Nabila Aprianti, Muhammad Faizal, Muhammad Said, Subriyer Nasir. "Valorization of Palm Empty Fruit Bunch Waste for Syngas Production Through Gasification", Journal of Ecological Engineering, 2020

Publication

25

Shengqiang Chang, Zhikai Zhang, Lixia Cao, Liqiang Ma, Siming You, Wangliang Li. "Co-gasification of digestate and lignite in a downdraft fixed bed gasifier: Effect of temperature", Energy Conversion and Management, 2020

Publication

26

Zainab Afailal, Noemí Gil-Lalaguna, Isabel Fonts, Alberto Gonzalo, Jesús Arauzo, José Luis Sánchez. "Thermochemical valorization of argan nutshells: Torrefaction and air-steam gasification", Fuel, 2023

Publication

27

kuwaitjournals.org

Internet Source

<1 %

<1 %

<1 %

<1 %

29

Carlos F. Valdés, Gloria Marrugo, Farid Chejne, Jorge I. Montoya, Carlos A. Gómez. "Pilot-Scale Fluidized-Bed Co-gasification of Palm Kernel Shell with Sub-bituminous Coal", *Energy & Fuels*, 2015

Publication

<1 %

30

Xuebin Zhang, Youjun Tao, Fangyuan Ma, Yushuai Xian. "Performance optimization and parametric evaluation of coal deashing and desulfurization in a heavy-medium enhanced gravity field", *International Journal of Coal Preparation and Utilization*, 2022

Publication

<1 %

31

Mervat Beramly, Mutasim Abdel-Jaber, Hasan Katkhuda, Nasim Shatarat, Malak Al-Diseet. "Shear strengthening and rehabilitating of reinforced concrete T-beams using externally carbon fiber reinforced polymer sheets", *Journal of Applied Engineering Science*, 2022

Publication

<1 %

Exclude quotes OnExclude matches OffExclude bibliography On