

BUKTI KORESPONDENSI ARTIKEL JURNAL INTERNASIONAL BEREPUTASI

Judul : Investigation of water quality in a tilapia (*Oreochromis niloticus*) culture area with embedded net cages in Warkuk Ranau Selatan District, Indonesia

Jurnal: Aquaculture, Aquarium, Conservation & Legislation - International Journal of the Bioflux Society (AACL Biolux) Vol.14 No.1, Hal. 158-172, tahun 2021

No	Perihal	Tanggal
1	Bukti konfirmasi submit artikel dan artikel yang di submit	30 September 2020
2	Bukti konfirmasi review dan hasil review pertama	18 Januari 2021
3	Bukti konfirmasi review dan hasil review kedua	2 Februari 2021
4	Bukti konfirmasi review dan hasil review ketiga	6 Februari 2021
5	Bukti konfirmasi artikel accepted	20 ebruari 2021

1. Bukti Konfirmasi Submit Artikel dan Artikel yang Disubmit (30 September 2020)

The screenshot shows an email from Tudor Papuc (ptudor2008@yahoo.com) to Tiara Santeri and Mohamad Amin. The email is titled "AAAL Bioflux - manuscript reception confirmation and details". The content of the email is as follows:


Dear Dr. Tiara Santeri and Dr. Mohamad Amin,

This is a message of confirmation regarding the reception of your manuscript **Study of water quality in Lake Ranau on Tilapia (*Oreochromis niloticus*) culture area using difference embedded net cage (KJT) density at Warkuk Ranau Selatan District**, submitted to our journal AAAL Bioflux.

I need you to do 3 things before proceeding:

1. The introduction is too short. Please expand it by at least 2 paragraphs.
2. Please tell me with which author should I correspond. On the paper is Dr. Amin, but Dr. Santeri made the submission. It is not a problem if the corresponding author from the paper is different from the actual corresponding author, but I should know with whom to correspond.
3. Please recommend 1-2 reviewers. I took a quick look at the manuscript, at the English is bad. Our reviewers would reject based on this English. However, the subject is interesting, and I think if you recommend 1 or 2 reviewers, they might be able to look past the bad English, and concentrate on the information presented. I will correct the English, but only after the evaluations come in.

2. Bukti konfirmasi review dan hasil review pertama (18 Januari 2021)



Investigation of water quality in a tilapia (*Oreochromis niloticus*) culture area using embedded net cages in district Warkuk Ranau Selatan, Indonesia

¹Tiara Santeri, ²Mohamad Amin, ³Erna Yuliwati

¹ Environmental Management, Sriwijaya University, Palembang, Indonesia; ² Faculty of Agriculture, Sriwijaya University, Inderalaya, Indonesia; ³ Faculty of Engineering, Muhammadiyah University, Palembang, Indonesia. Corresponding author: M. Amin, mohamadamin@fp.unsri.ac.id

Abstract. The waters of Lake Ranau, Warkuk Ranau Selatan District, Indonesia, are an area suitable for the development of tilapia aquaculture using embedded net cages. Organic waste generated from aquaculture activities can decrease the quality of lake waters. The purpose of this study was to analyze the quality of the waters of Lake Ranau in Warkuk Ranau Selatan District. This research was conducted in January 2020. Analysis of water quality data used the **Pollution Index** method. The results showed that water quality parameters could be included in the good category, except for ammonia concentration at several stations, where values exceeded the quality standard. This is likely to occur because of excessive fish farming and settlement activities around the waters. Overall, the waters of Lake Ranau in the Warkuk Ranau Selatan District are still viable for tilapia aquaculture activities using embedded net cages.

Key Words: Aquaculture, Lake Ranau, Organic, Viable.

Introduction. Lake Ranau is one of the natural resources used in fish farming. It has long been used by local fishing communities in making a living (Makmur et al 2017). Lake Ranau is a place for Nile tilapia (*Oreochromis niloticus*) aquaculture using embedded net cages (KJT) by the communities near the lake. Communities in the region use KJT aquaculture activities as permanent or side livelihoods.

Based on the 2016 Data of Fishery Production in Warkuk Ranau Selatan District, 322 units of KJT produced 716 tons of tilapia. Fish farming with the KJT system greatly helps the economy or the welfare of the community. However, aquaculture production activities must still pay attention to the preservation of resources and the environment to create a sustainable cultivation area.

Organic waste generated from fish farming activities can decrease the quality of lake waters. The farming waste gets into the waters, increasing nutrient levels and polluting the environment (Erlania 2010; Urbasa et al 2015; Tokah et al 2017). This is in line with the opinion of Hidayah et al (2014), Muhaemi et al (2015), and Syawal et al (2016), that the water quality derivation is caused by various activities of the lakeshore communities and entrepreneurs.

The research results of Saputra et al (2017) also show the high value of ammonia, nitrate, and sulfide caused by the accumulation of several pollutant wastes from KJA feed residue, local community waste, and agricultural activities around Lake Buyan. Good water quality will have a positive impact on the fish, ensuring the continuity of tilapia production supply in the desired amount, while poor water quality can cause fish growth and welfare to suffer.

Cultivation locations are a determinant component for successful tilapia farming at Warkuk Ranau Selatan District. It affects the sustainability of aquaculture activities and ecosystems in its area. The location of the cultivation is closely related to the water quality parameters supporting the cultivation process (Muhaemi et al 2015). The waste

Commented [u1]: what is KJA? Until now, the abbreviation for embedded net cages was KJT; is it something different?

Commented [TS2]: yes different, but the difference is only about the design. Saputra et al (2017) research uses KJA (floating net cages) while mine is KJT (embedded net cages)

materials generated by various human activities need to be considered because they affect the quality of the water physically, chemically, and biologically (Purwanto et al 2014; MZ et al 2015; Harianto & Efendi 2017). This study aimed to provide information about the quality of the waters of Lake Ranau in Warkuk Ranau Selatan District, Indonesia.

Material and Method

Study area. This research was conducted in January 2020 in Lake Ranau Waters, Warkuk Ranau Selatan District, South OKU Regency, South Sumatra Province, Indonesia (Figure 1). The sampling location was selected based on the difference of embedded net cages (KJT) **surface**: the waters of Gedung Ranau (station I) was the control location, with no KJT activity, Tanjung Jati (station II), with a KJT surface of 2.900 m², Way Wangi Seminung (station III), with a KJT surface of 22.005 m², whereas the Kota Batu (station IV), with a KJT surface of 37.895 m².

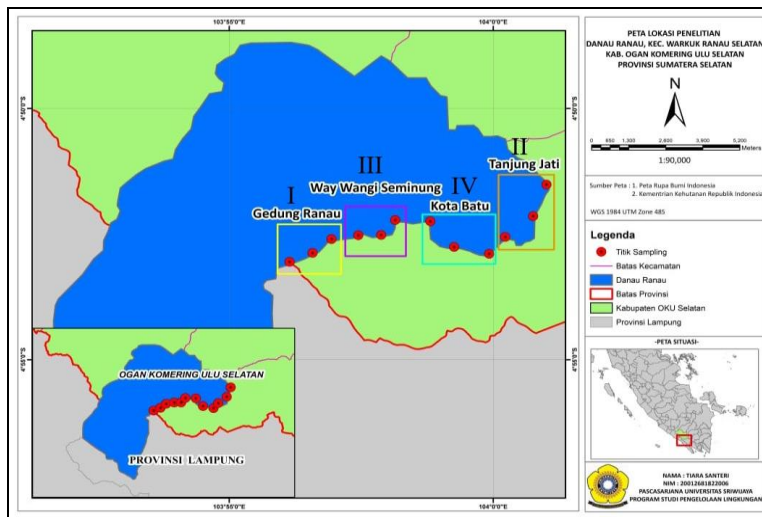


Figure 1. Research location.

Data collection. The data collected in this study consisted of primary and secondary data. Primary data collected included data on water quality measurements and market observations to determine the diversity of fish species in the Warkuk Ranau Selatan District market and its surroundings, while secondary data was obtained from relevant agencies, including general conditions of research stations, area maps, government regulations, and literature studies or other references in the form of journals, books, articles from prior research and relevant data on the internet. Primary data collection was carried out *in-situ* (direct observation) and *ex-situ*, with analyses in the chemical laboratory of the Environmental Health Engineering Institute for Disease Control (BTKL-PP) and the biological laboratory of the Public Aquatic Fisheries Research and Fisheries Research Institute (BRPPUPP). *In-situ* data analysis included the determination of temperature, salinity, depth, brightness, turbidity, current speed, dissolved oxygen (DO), pH. While the *ex-situ* data analysis includes parameters of nitrate, nitrite, ammonia, phosphate, sulfide, and abundance of phytoplankton (Hasan et al 2016). The water sample was put into a 2 liter sample bottle for measurement of chemical parameters. While the water sample for phytoplankton analysis was put into a 250 ml sample bottle. At each station, water quality measurements were carried out 3 times, namely in the upstream, middle and downstream parts. Measurement of water quality and sampling is carried out in the morning between 08.00 - 12.00 WIB.

Commented [u3]: please write the stations in order, from I to IV

Commented [u4]: this shows a surface, not a density; what do you mean by this measurement unit? please correct here and the measurement units for the other stations too; is this the surface of the cages or what is it?

if it is the surface of the cages, and that is what you measured, please correct throughout the paper, and mention surface instead of density

Commented [u5]: there is no explanation about sampling method, where is the position water for the sample?

Commented [u6]: please mention how you determined each parameter, with what instruments; only once? or were there repetitions? did you determine the parameters in the same period (morning or afternoon) or in different days?

Commented [u7]: please mention how or use a reference for the method

Commented [u8]: please mention how you collected the samples, the volume of samples, how you counted the phytoplankton, etc.

Analysis of water quality based on the Pollution Index method. The data analysis of Lake Ranau water quality used the Pollution Index (PI) method. This index is used to determine the level of relative pollution to acceptable water quality parameters. Based on the Decree of the Minister of Environment No 115 the year of 2003 Annex II, the first step to calculate the PI value is comparing the concentration of each polluted parameter (Ci) with the quality standard (Li), thus, the measurement results (Ci / Li) are obtained for each of the parameters. The PI value is calculated with the following equation:

$$PI_j = \sqrt{\frac{\left(\frac{C_i}{L_{ij}}\right)_M^2 + \left(\frac{C_i}{L_{ij}}\right)_R^2}{2}}$$

Where : PI_j = Pollution index for the designation of j
 C_i = Concentration of water quality parameters i
 L_{ij} = Concentration of water quality parameters i listed in the water designation standard j
 M = Maximum
 R = Average

The water quality assessment categories based on the pollution index value (PI_j) are as follows :

Table 1

Water quality classification from the US Environmental Protection Agency

Number	The Pollution Index Value	Category
1	0 ≤ PI _j ≤ 1	Meet the quality standard
2	1 < PI _j ≤ 5	Lightly polluted
3	5 < PI _j ≤ 10	Moderately polluted
4	PI _j > 10	Heavily polluted

Note: source: Environmental Protection Agency (EPA), 1975

Analysis of water quality for the development of Nile tilapia cultivation sites. This analysis is needed to prepare, control, estimate the impact, and further manage the farming activities, to not pollute the environment. Water quality parameter criteria that support the development of tilapia aquaculture using KJT can be seen in Table 2.

Table 2

Criteria for water quality parameters at tilapia cultivation locations using embedded net cages

Parameters	Weight	Parameter Score					
		Very Good	Score	Medium	Score	Bad	Score
² Temperature (°C)	3	28-32	5	25 - <28	3	<25	1
⁴ Brightness (m)	2	≥5	5	3 - < 5	3	<3	1
⁴ Turbidity (ntu)	2	≤5	5	5 - 30	3	>30	1
⁶ Depth (m)	1	>3	5	3 - 2	3	<2	1
⁵ Current speed (m s ⁻¹)	2	0-0,3	5	0,4 - 1	3	>1	1
² Dissolved oxygen (mg L ⁻¹)	3	>5	5	3 - 5	3	< 3	1
⁶ pH	1	7 - 8	5	6,5 - <7	3	<6,5 - >9	1
⁷ Ammonia (mg L ⁻¹)	1	<0,02	5	0,02 - 0,05	3	>0,05	1
³ Nitrate (mg L ⁻¹)	1	<2	5	2 - 5	3	>5	1
⁶ Nitrite (mg L ⁻¹)	1	<0,04	5	0,04 - 0,06	3	>0,06	1
³ Phosphate (mg L ⁻¹)	1	<1	5	1 - 2	3	>2	1
⁶ Sulfide (mg L ⁻¹)	1	<0,002	5	0,002 - 0,005	3	>0,005	1
¹ The abundance of phytoplankton (ind L ⁻¹)	1	≥15.000	5	2.000 - 15.000	3	≤ 2.000	1

Note: Astuti et al (2016)¹; Carman & Sucipto (2013)²; Haris & Yusanti (2019)³; Hartami (2008)⁴; Khairunnisa et al (2015)⁵; Muhaemi et al (2015)⁶; SNI 6139:2009⁷.

Muhaemi et al (2015) explained that the water quality characteristics can be calculated from the total score from the multiplication of the parameter value (A) with its weight (B), which is then used to determine the feasibility class of the Nile tilapia cultivation location:

$$\text{Total Scoring} = (\text{Total Score} / \text{Total Score Max}) \times 100$$

Based on these calculations, the score of the water feasibility was obtained as presented in Table 3.

Table 3

Water feasibility score

Number	Range of values (%)	Status
1	80 – 100	Very good
2	50 – <80	Medium
3	< 50	Bad

Note: source: Muhaemi et al (2015).

Statistic analysis. Data analysis was carried out by using the analysis of variance (ANOVA) to determine significant relationships or differences in water quality parameters influenced by the difference in the surface of KJT. Subsequent data processing was carried out by tabulating the data, and presented in the form of a trend graph based on the location of cage surface. Trend analysis was used to determine the changes in water quality parameters as a reflection of the effect of changes in the increase in the number of KJT in the waters of Lake Ranau.

Commented [u9]: the number of KJT is different from the density of KJT; please correct where necessary

Results and Discussion

Evaluation of water quality based on the STORET method. The value of the measurement results of the average water quality parameters during the observation are as follows in Table 4.

Table 4

The average value of the measurement results for water quality parameters

Parameters	Unit	Research Location			
		Gedung Ranau	Tanjung Jati	Way Wangi Seminung	Kota Batu
Temperature	°C	27,7	27,8	27,9	27,9
Brightness	m	4,48	3,32	3,17	3,07
Turbidity	ntu	0,84	0,92	0,95	1,41
Depth	m	8,17	4,72	3,97	3,81
Current speed	m s ⁻¹	0,080	0,084	0,087	0,085
Dissolved oxygen	mg L ⁻¹	3,1	3,0	2,9	2,9
pH		7,62	8,05	7,90	8,04
Ammonia	mg L ⁻¹	0,001	0,02	0,003	0,02
Nitrate	mg L ⁻¹	3,7	2,4	2,6	3,8
Nitrite	mg L ⁻¹	0,004	0,001	0,001	0,014
Phosphate	mg L ⁻¹	0,161	0,129	0,150	0,140
Sulfide	mg L ⁻¹	0	0	0	0
The abundance of phytoplankton	ind L ⁻¹	19817	20750	29883	15067

The results of data analysis from observations in the 4 stations in the waters of Lake Ranau have the scores presented in Table 5.

Commented [u10]: Move the big section with the parameters before this subchapter, because you need to present first what you measured, and only then to show the analyses of your study
ok i added it

Table 5
Score of Lake Ranau water quality parameters based on the STORET method

Surface of embedded net cages	Stations	Total Score	Quality status
0 m ²	I	0	Meet the quality standard
2.900 m ²	II	0	Meet the quality standard
22.005 m ²	III	0	Meet the quality standard
37.895 m ²	IV	-2	Lightly polluted

Commented [u11]: the density is a number or weight or other measurement unit in a volume or surface; you do not have any measurement unit here; please correct

Based on the results of calculations using the STORET method, it can be seen that the water quality conditions in Station I, Station II, and Station III waters still meet the quality standard. Meanwhile, Kota Batu has a total score of -2, included in Class B due to lightly polluted criteria with a value of -1 to -10. Pollution that occurs in Kota Batu is caused by ammonia concentrations that exceed the quality standard (0.03 mg L⁻¹).

The high KJT surface in Kota Batu is thought to be caused by ammonia pollution. Overfeeding and high excretion increases the ammonia concentration in Kota Batu waters. The remains of feed that settle to the bottom undergo a process of decay resulting in ammonia (Yulhadis et al 2018). Overall, the results of the analysis using the STORET method show that each station still supports fixed KJT activities, because the scores at the 4 stations are still classified as good.

The effect of KJT on water quality. The temperature parameters at the study site ranged from 27.7 to 27.9°C. Figure 2 shows that the relationship between temperature and cage surface is strong (89%). Temperature is known to have a positive influence on KJT, a high temperature positively affecting the number of KJT in these waters. The temperature parameters in each fixed net cage were not different (p>0.05).

Based on Government Regulation No. 82 the year 2001 (class II), the temperature range in these waters supports the survival of aquatic organisms, with a deviation of 3°C from the optimal value. Adawiyah et al (2018) stated that the temperature of water bodies is influenced by season, latitude, time of day, air circulation, cloud cover, flow and depth of water bodies. Optimal water temperature supporting the growth of Nile tilapia is 28°C (Tatangindatu et al 2013). According to Aliyas et al (2016), the water temperature will affect the appetite and metabolic processes of fish. The digestion in fish is slow when the temperature is low, whereas in warm temperatures the digestion is faster.

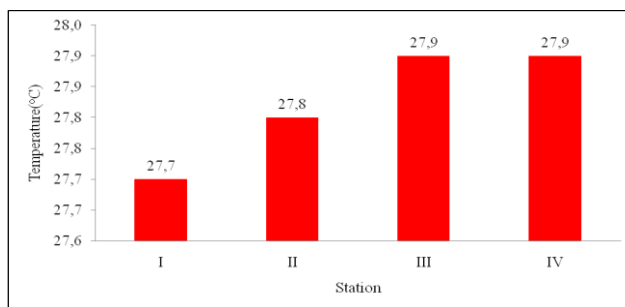


Figure 2. The temperature on the difference KJT surface.

In general, the brightness in the waters of Lake Ranau is still considered good for the growth of tilapia. According to Hasim et al (2015), the optimal value of water transparency for aquaculture in waters ranges from 20 – 40 cm. The water transparency in the four locations does not have a significant difference, the range from 3.07 m to 4.48 m.

Commented [u12]: please explain in Material and Method what equations you present here in the figures and how you arrived to the equations
Sorry there is a change in the chart

Commented [u13]: please change in Material and Method Station I, II, III, IV, to 1, 2, 3, 4, if you used 1,2,3,4 in the figures

Commented [u14]: the reviewers cannot check the validity of the significance, without the values calculated; however, from minimum 5 m to 3 m, there is a good difference, so please rephrase the whole paragraph, because you can't say that the water is good with a 3 m visibility, if the minimum is 5 m visibility;

- also, see if you can find a different reference, and not Hartami, because there are very many cases with great growth for tilapia in water with visibility under 20-30 cm, not 5 m

From Figure 3, it can be seen that the brightness has a strong relationship with the cage surface (74.5%). Figure 3 indicates that the brightness is decreasing as the KJT activity increases in these waters. The contribution of waste from fish found in KJT can cause the turbidity to increase. The decrease in brightness level due to cage activity can be caused by suspended feed residue (Maniagasi et al 2013). The large number of anthropogenic activities carried by the current also causes the brightness to be low.

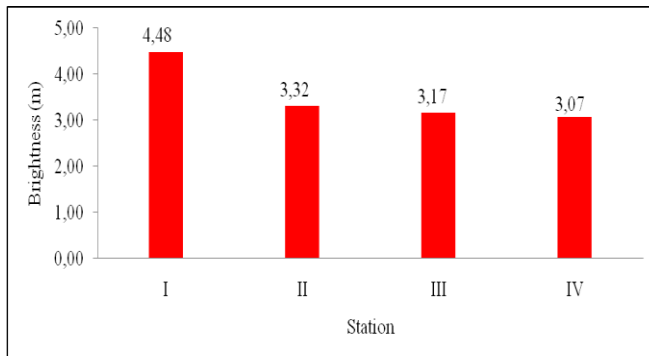


Figure 3. Brightness in different KJT surface.

Figure 4 shows that the level of water turbidity tends to be higher with increasing KJT activity in that location, with a determination coefficient value of 76%. Thus, the relationship of turbidity to cage surface is strong. ANOVA test outputs show that the significance value is 0.004 (<0.05), a significant difference occurring in turbidity at the 4 observation stations. The level of water turbidity at each observation station ranges from 0.84 ntu to 1.41 ntu, in good limits for Nile tilapia.

The ideal turbidity value for fish farming should not exceed 5 NTU (Hartami 2008). The highest level of turbidity is at station 2 (Kota Batu), because of the highest surface of KJT. Cages provide a pollution load in the water, causing water turbidity (Saputra et al 2017). In addition, household waste dumped directly into water bodies result in high levels of turbidity in the waters.

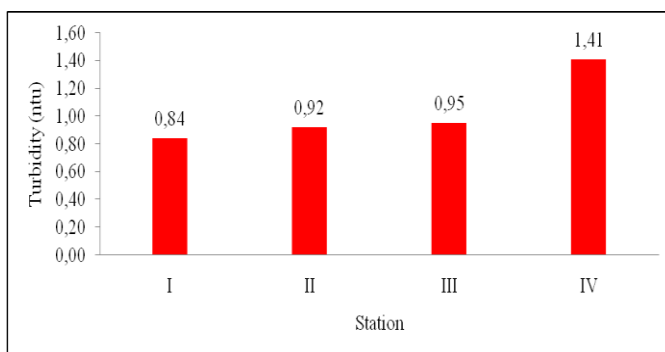


Figure 4. Turbidity on the difference KJT surface.

Depth is one of the physical parameters that affect the brightness of the waters, the brightness being lower in deeper waters (Adawiyah et al 2018). The results of the depth measurement obtained in the waters of Lake Ranau are suitable for the life of Nile tilapia, the values ranging from 3.81 m to 8.17 m. Muhaemi et al (2015) stated that the ideal

Commented [u15]: what measurement unit?

water depth for freshwater cage cultivation is at least 2 m. Space for the fish to move will increase with increasing water depth. The analysis of variance (ANOVA) shows that there is a significant difference ($p < 0.05$) in depth at the 4 KJT locations, denser KJT being present in lower depths. Station IV is significantly different from station I, station II, and station III

Commented [u16]: between what pairs of stations?

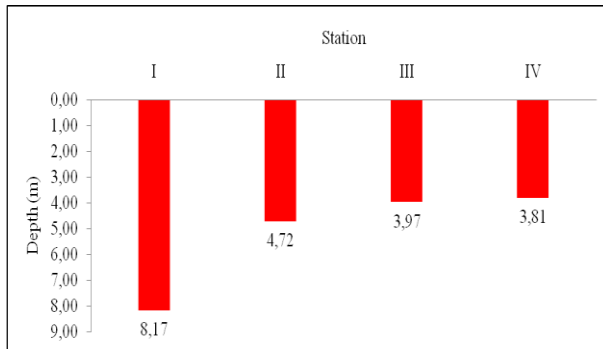


Figure 5. The difference of depth on KJT surface.

The surface current speed values in the 4 stations do not have significant differences. The average current speeds range from 0.08 to 0.087 $m s^{-1}$ in the 4 stations, as presented in Figure 6. The current speed is slow and feasible for KJT activities. In general, lakes have calm water, the water moving at a very slow speed. Khairunnisa et al (2015) explained that the lake is classified into tapered waters, where generally the movement of water in the lake is limited due to the strength of the wind.

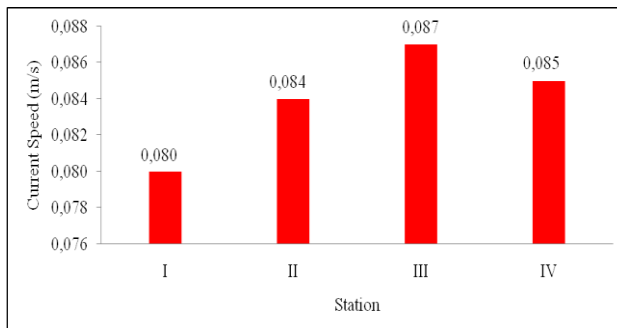


Figure 6. Current speed on the difference KJT surface.

DO is needed by all aquatic organisms for respiration, metabolic processes, or exchange of substances, helping the production of energy for growth and culture (Hamuna et al 2018). DO concentrations at the study sites ranged from 2.9 to 3.1 $mg L^{-1}$. The relationship between DO and cage surface is strong, the DO being higher with a lower KJT activity (Figure 7). The difference in DO at the observation stations is not significant ($p > 0.05$).

The DO concentration obtained indicates that the waters of Lake Ranau still meet quality standards. The lowest DO concentration was found in Station III and Station IV, 2.9 $mg L^{-1}$. The results of Utomo et al (2017) also show that the DO content in Lake Ranau has a low number, with values ranging from 1.61 to 5.23 $mg L^{-1}$. The large number of fish farming activities using embedded net cages in the waters of Station IV and Station III and residential activities contribute to the low DO. Elfidasari et al (2015)

Commented [u17]: are there other types of fish farming activities at the lake? not with KJT, but other farms; if there are, could they also influence all the parameters?
there is only fish farming activity using net cages

stated that the decrease in DO levels is caused by a large amount of organic waste originating from activities in lake water bodies, especially fish farming activities and waste. According to the Government Regulation 82 from 2001, the concentration of DO for fish farming is at least 3 mg L⁻¹. The low DO in **Station III** and **Station IV** is thought to have also been caused by the high temperature in these waters, DO levels decreasing in high temperatures (Adawiyah et al 2018).

Commented [u18]: used the notations proposed in Material and Method (station number)

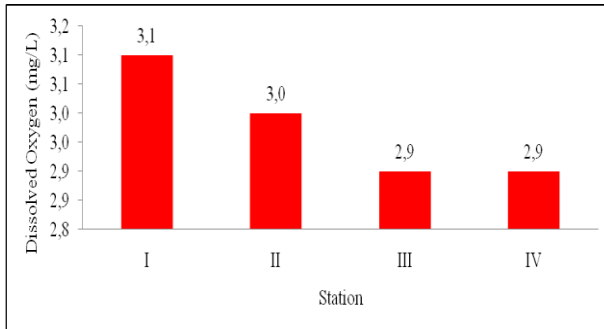


Figure 7. Dissolved Oxygen on the difference KJT **surface**.

The measurement results of the average pH values ranged from 7.62 to 8.05 in the 4 stations. Based on quality standards, the pH value in the waters of Lake Ranau does not exceed the quality standard set by Government Regulation 82 of 2001, namely 6 to 9. The pH value of lake water is still good for the benefit of Nile tilapia aquaculture. According to Muhaemi et al (2015), a good pH value for tilapia farming activities ranges from 6 to 9. The pH has a strong relationship with cage **surface**, where the water is more alkaline in areas with higher KJT activities.

Station 4 has a high pH value due to the **surface** of KJT activities in that location. Apart from station 4, it can be seen that station 2 also has a high pH value. However, it has a small **embedded net cages surface**, but apart from the **embedded net cages** here, it is close to the **floating net cages** location. This causes a high pH value, due to a large amount of waste and fish food leftovers from KJT and KJA that accumulate on the bottom of these waters. The entry of organic and inorganic waste into the waters can affect the pH value that comes from domestic activities and fish cultivation (Selanno et al 2016).

Commented [u19]: This is incorrect. Something is not right with the pH. Organic waste always lowers the pH of water. It does not increase it. So in waters with more organic waste (more KJT), the pH should be lower. Either check again your measurements, or please give a possible explanation for why the pH increases, being more alkaline, when more organic waste should decrease it. And how is it more acidic in the control, where there is no organic waste from farms.

According to the sources I read (Pramleonita et al. 2018), the increase in pH during the day indicates the occurrence of chemical and biological processes in the form of photosynthetic processes from phytoplankton, microalgae, and other aquatic plants that produce O₂, so that the pH value of the waters increases.

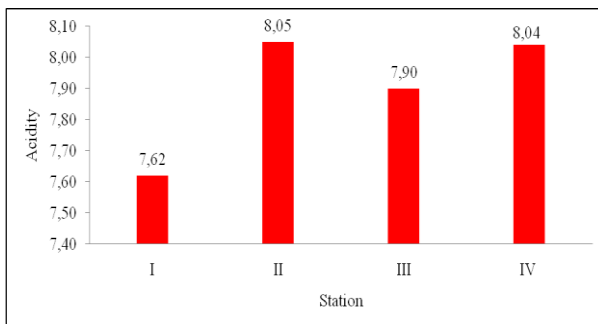


Figure 8. Acidity on the difference KJT **surface**

Commented [u20]: please mention this in the text, too

The ammonia in Lake Ranau water ranged from 0.001 to 0.02 mg L⁻¹. Ammonia has a very strong relationship with cage **surface**, where the coefficient of determination is 1 (Figure 9). The more KJT activity means a greater excretion by the fish, which causes

high ammonia content. The highest ammonia content is in **Station IV** and **Station II**. Kota Batu (station 4) is the village with the most tilapia farming businesses using KJT, while in Tanjung Jati there are only a few KJT activities, but there are also KJA in the proximity, currents carrying some fish waste from them to the station. The ammonia value at each observation location is normal because it does not exceed the standard ammonia concentration permitted by Government Regulation No. 82 of 2001 for cultivation activities. The quality standard for ammonia is less than 0.02 mg L⁻¹. The content of free ammonia toxic to tilapia and that can cause sudden fish death is between 0.1 - 0.2 mg L⁻¹ (Carman & Sucipto 2013).

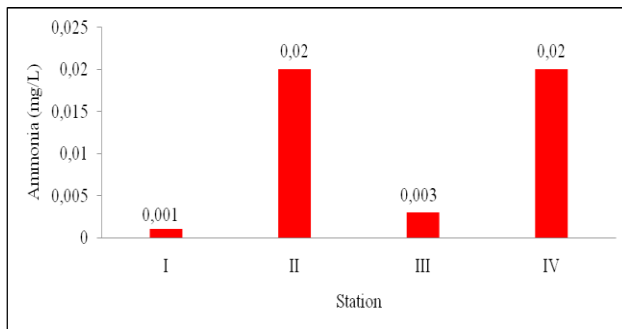


Figure 9. Ammonia on the difference KJT **surface**.

The content of nitrate (NO₃) in the waters of Lake Ranau is relatively low, with an average of 2.4 - 3.8 mg L⁻¹. Government Regulation Number 82 from 2001 requires a nitrate content of less than 20 mg L⁻¹ for fishery activities. **This shows that the nitrate content in these waters is not yet harmful to the life of tilapia.** Based on Figure 10, the nitrate content appears to have a very strong relationship with cage **surface**, which is 99.2%.

The highest nitrate concentration occurs in the area with the highest KJT **surface**, namely Kota Batu (station 4). This can be influenced by excess of feed waste, domestic waste, and fish waste, which is broken down by bacteria into inorganic material in the form of nitrate. Irahayim & Fotedar (2019) explained that uneaten feed is a source of nitrogen waste. Gedung Ranau, which did not have KJT activity also had a high nitrate concentration after Kota Batu, presumably due to a large amount of domestic waste from the people living around the waters. This is in line with the research of Haris & Yusanti (2019), who describe the high nitrate due to pollution from human activities and animal feces.

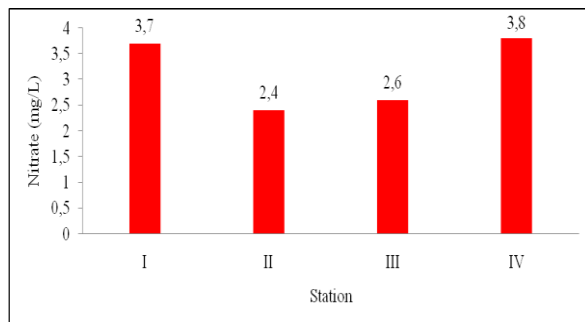


Figure 10. Nitrate on the difference KJT **surface**

The content of nitrite at each station still meets the quality standard requirements for water contamination of Government Regulation Number 82 from 2001 regarding Class III water requirements, where the value range is from 0.001 to 0.014 mg L⁻¹. Figure 11 shows that the nitrite content of station II and station III is significantly different from the nitrite content at station I and station IV. With more KJT activity, the nitrite concentration is higher. The highest nitrite content is in the waters of Station IV and Station I. The high level of nitrite in station IV is closely related to the waste material from the metabolism of fish cultivated using KJT. The results of Tokah et al (2017) also show that high organic matter from fish farming increases the concentration of nitrite in the water.

Station IV influenced by the large number of people who use these waters. The high population in the area is partially the cause of a large amount of domestic anorganic and organic waste discharged to water bodies. The high content of organic matter in the waters can cause eutrophication, reducing DO levels (Simbolon 2016).

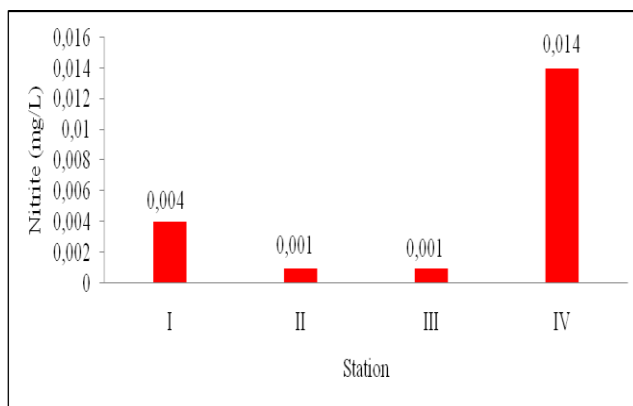


Figure 11. Nitrite on the difference KJT surface

Sulfide (H₂S) can cause problems because it dissolves easily, it is toxic, and causes an unpleasant odor (Lihawa & Mahmud 2017). High sulfide concentrations will reduce DO levels in waters resulting in fish mortality (Apendi et al 2019). The results of the analysis for the sulfide content in the waters of Lake Ranau show that the sulfide content is 0, meaning that it is following the quality standards as stated in Government Regulation Number 82 from 2001, which is less than 0.02 mg L⁻¹. This is thought to be due to the low decomposition of organic materials containing sulfur by anaerobic bacteria.

Phosphates at cultivation locations in the waters of Lake Ranau were in concentrations ranging from 0.129 to 0.161 mg L⁻¹. The phosphate content at the study sites did not vary significantly and had a very strong relationship with KJT (Figure 12). The phosphate values meet the quality standard value. According to Government Regulation Number 82 from 2001, the quality standard value for phosphate (PO₄) is less than 1 mg L⁻¹.

Haris & Yusanti (2019) stated that a phosphate content less than 1 mg L⁻¹ is good for developing cultivation activities. The highest phosphate content is in the waters of the Gedung Ranau, which is the control location, without KJT activity. This is thought to have originated from the large number of settlements that produce organic waste. These waters as used for baths, wash, and toilet necessities by people who are living near the lake.

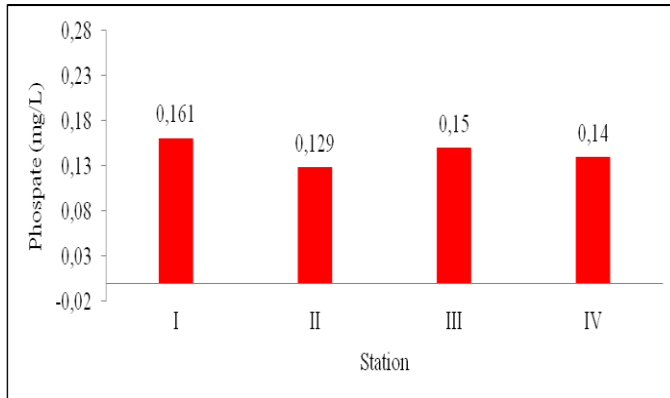


Figure 12. Phosphate on the difference KJT surface

The phytoplankton found in the waters of Lake Ranau, Warkuk Ranau Selatan district, consists of 30 genera from 3 classes: Bacillariophyceae, Chlorophyceae, and Cyanophyceae. Chlorophyceae class is the most common phytoplankton. The abundance of phytoplankton between observation stations is different and has variations (Figure 13). Figure 13 shows that Way Wangi Seminung has the highest abundance of phytoplankton, which is thought to be due to the movement of water masses that carry nutrients in that location. Nutrient content, currents, wind, light, and predators are all factors that influence the presence of phytoplankton in a water body (Garno 2008; Juadi 2018). The abundance of phytoplankton in the waters of Lake Ranau, Warkuk Ranau Selatan district, is around 15067- 29883 ind L⁻¹. Thus, it can be said that these waters are eutrophic, but still support the life of aquatic organisms, especially fish. Eutrophic waters are waters with high fertility rates where the abundance of phytoplankton is $\geq 15,000$ ind L⁻¹ (EPA 1975).

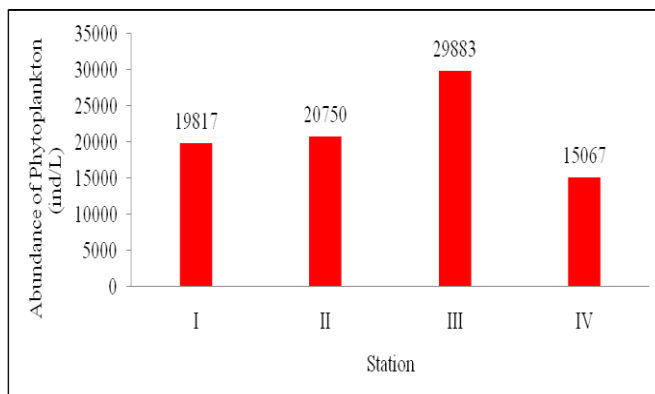


Figure 13. The abundance of phytoplankton on the difference KJT surface

Water quality status for the development of Nile tilapia farming locations. Based on the weighted results of the criteria for water quality parameters, the waters of Lake Ranau, Warkuk Ranau Selatan district, are still good enough for Nile tilapia aquaculture activities.

Table 6
 Status of water quality for the development of Nile tilapia cultivation locations in Ranau Lake watershed cages in Warkuk Ranau Selatan District

Station	Area	Total of Values	Status
I	Gedung Ranau	88	Very Good
II	Tanjung Jati	86	Very Good
III	Way Wangi Seminung	88	Very Good
IV	Kota Batu	86	Very Good

From the weighting and scoring results in the waters of Lake Ranau, Warkuk Ranau Selatan district, the suitability score for Nile tilapia cultivation in Station IV is 88%, station II is 86%, in station III is 88%, and station IV is 86%. Based on the results of the feasibility analysis, it can be said these waters are classified into the very good category to support the survival of Nile tilapia.

There are several parameters in these waters that need some attention to optimize Nile tilapia aquaculture. DO in Kota Batu (station 4) and Way Wangi Seminung (station III) is lower than in Tanjung Jati and Gedung Ranau for sustainable Nile tilapia aquaculture. A large number of KJT near the shore is thought to have caused the low DO in both locations. The KJT trigger an increase in the organic waste, the decomposition process requiring oxygen, decreasing its levels (Simbolon 2016). Meanwhile, the brightness, ammonia, and nitrate parameters did not reach the optimal score, but they were still categorized as good for the sustainability of Nile tilapia aquaculture. A polluted aquatic environment makes Nile tilapia susceptible to disease (Abadi et al 2020). To maintain the tilapia habitat, more attention is needed to the water quality parameters that do not reach the optimal score, so that Nile tilapia cultivation in KJT can be carried out properly and sustainably.

Conclusions. The quality of the waters of Lake Ranau, Warkuk Ranau Selatan district is in a good category and supports fish farming activities. Water quality parameters generally meet class III water quality standards by the Government Regulation No. 82 of 2001, except for the ammonia at station IV (Kota Batu) with the highest KJT surface, where the value exceeds the quality standard. The effect of some water quality parameters on average cage surface is strong. The relationships between temperature, DO, current speed, salinity, and sulfide parameters with cage surface are classified as weak or not significant.


The development of KJT in the waters of Lake Ranau, Warkuk Ranau Selatan District, Indonesia, is strategic for Nile tilapia fish farming activities. However, the number of KJT activities must still be limited and the zoning must be appropriate. The Government, stakeholders, and the community need to protect these waters, to minimize anthropogenic waste, to reduce the pollution load originating from KJT in Lake Ranau.

References

- Abadi, A.S., Hismayasari, I.B., Supriatna, I., Saidin, Yani, A., Sayuti, M., 2020 The mass death of Nile tilapia (*Oreochromis niloticus*) in Sorong District, West Papua, Indonesia. *AAFL Bioflux* 13(4):1906-1916.
- Adawiyah, R., Laili, S., Syauqi, A., 2018 Uji kualitas air sungai Bengawanjero di Desa Bojoasri Kecamatan Kalitengah Kabupaten Lamongan. *Ilmiah Biosaintropis* 3(32): 1-9.
- Aliyas, Ndobe, S., Ya'la, Z.R., 2016 Pertumbuhan dan kelangsungan hidup ikan nila (*Oreochromis* sp.) yang dipelihara pada media bersalininitas. *Sains dan Teknologi Tadulako* 5(1):19-27.
- Apendi, A., Ling, T.Y., Nyanti, L., Sim, S.F., Grinang, J., Lee, K.S.P., Ganyai, T., 2019 Impacts of sulfide exposure on juvenile Tor tambroides: behavioral responses and mortality. *AAFL Bioflux* 12(3):867-879.

- Arum, E.S., Hariani, N., Hendra, M., 2018 Struktur komunitas plankton permukaan pada Danau Labuan Cermin Kec. Biduk-Biduk, Kab. Berau. Pendidikan Matematika dan IPA 9(1):47-56.
- Astuti, M.Y., Damai, A.A., Supono, 2016 Evaluasi kesesuaian perairan untuk budidaya ikan nila (*Oreochromis niloticus*) di kawasan pesisir Desa Kandang Besi Kecamatan Kota Agung Barat Kabupaten Tanggamus. Rekayasa dan Teknologi Budidaya Perairan 5(1):621-630.
- Carman, O., Sucipto, A., 2013 Pembesaran nila 2,5 bulan. Penebar Swadaya, Jakarta, 100 P.
- Elfidasari, D., Noriko, N., Effendi, Y., Puspitasari, R.L., 2015 Kualitas air Situ Lebak Wangi Bogor berdasarkan analisa fisika, kimia dan biologi. Al-Azhar Indonesia Seri Sains dan Teknologi 3(2):104-112.
- [EPA] E.P.A., 1975 Model state water monitoring program. Environmental Protection Agency, United States, 77 p.
- Erlania, 2010 Pengendalian limbah budidaya perikanan melalui pemanfaatan tumbuhan air dengan sistem constructed wetland. Media Akuakultur 5(2):129-137.
- Garno, Y.S., 2008 Kualitas air dan dinamika fitoplankton di perairan Pulau Harapan. Hidrosfir Indonesia 3(2):87-94.
- Hamuna, B., Tanjung, R.H.R., Suwito, Maury, H.K., Alianto, 2018 kajian kualitas air laut dan indeks pencemaran berdasarkan parameter fisika-kimia di perairan Distrik Depapre, Jayapura. Ilmu Lingkungan 16(1):35-43.
- Hariato, E., Efendi, I., 2017 Analisis fisika kimia perairan untuk pemilihan lokasi budidaya ikan kerapu (*Serranidae*) di Teluk Saleh Kabupaten Sumbawa, Nusa Tenggara Barat dengan metode storet dan analisis multivariat. Akuakultur Sungai dan Danau 2(1):25-42.
- Haris, R.B.K., Yusanti, I.A., 2019 Analisis kesesuaian perairan untuk keramba jaring apung di Kecamatan Sirah Pulau Padang Kabupaten Ogan Komering Ilir Provinsi Sumatera Selatan. Lahan Suboptimal 8(1):20-30.
- Hartami, P., 2008 Analisis wilayah perairan Teluk Pelabuhan Ratu untuk kawasan budidaya perikanan sistem keramba jaring apung. Institut Pertanian Bogor, Bogor, 161 p.
- Hasan, H., Prasetio, E., Muthia, S., 2016 Analisis Kualitas Perairan Sungai Ambawang di Kecamatan Sungai Ambawang, Kabupaten Kubu Raya Untuk Budidaya Perikanan. Ruaya 4 (2):2541-3155.
- Hasim, Koniyo, Y., Kasim, F., 2015 Parameter Fisik-kimia Perairan Danau Limboto sebagai Dasar Pengembangan Perikanan Budidaya Air Tawar. Ilmiah Perikanan dan Kelautan 3(4):130-136.
- Hidayah, A.M., Purwanto, Soeprobowati, T.R., 2014 Biokonsentrasi faktor logam berat Pb, Cd, Cr dan Cu pada ikan nila (*Oreochromis niloticus* Linn.) di karamba Danau Rawa Pening. BIOMA 16(1):1-9.
- Irhayyim, T., Fotedar, R., 2019 Effects of fish size and biofiltration techniques on water quality and nitrogen removal efficiency in recirculating aquaculture systems. AACL Bioflux 12(5):1606-1616.
- Juadi, I.D., Nurfadillah, 2018 Komposisi jenis dan kelimpahan fitoplankton di perairan Ujong Pie Kecamatan Muara Tiga Kabupaten Pidie. Ilmiah Mahasiswa Kelautan dan Perikanan Unsyiah 3(1):112-120.
- Khairunnisa, Barus, T.A., Harahap, Z.A., 2015 Analisis kesesuaian wilayah untuk budidaya ikan keramba jaring apung di perairan Girsang Sipangan Bolon Danau Toba. Aquacoastmarine 3(1):1-11.
- Lihawa, F., Mahmud, M., 2017 Evaluasi karakteristik kualitas air danau Limboto. Pengelolaan sumberdaya alam dan lingkungan 7(3):260-266.
- Makmur, S., Muthmainnah, D., Subagdja, 2017 Pengelolaan ikan hampal (*Hampala macrolepidota* Kuhl & Van Hasselt 1823) di Danau Ranau, Sumatera Selatan dan Lampung. Kebijakan Perikanan Indonesia 9(2):61-70.
- Maniagasi, R., Tumembouw, S.S., Mundeng, Y., 2013 Analisis kualitas fisika kimia air di areal budidaya ikan Danau Tondano Provinsi Sulawesi Utara. Budidaya Perairan 1(2):29-37.

- Muhaemi, Tuhumury, R., Siegers, W., 2015 Kesesuaian kualitas air keramba ikan nila (*Oreochromis niloticus*) di Danau Sentani Distrik Sentani Timur Kabupaten Jayapura Provinsi Papua. *Fisheries Development* 1(2):45-58.
- MZ, N., Soewardi, K., Pratiwi, N.T.M., 2015 Penentuan daya dukung perairan untuk perikanan alami (studi kasus: Situ Cilala, Kabupaten Bogor). *Ilmu Pertanian Indonesia (JIPI)* 20(1):66-71.
- Purwanto, H., Pribadi, T.A., Martuti, N.K.T., 2014 Struktur komunitas dan distribusi ikan di perairan sungai Juwana Pati. *Life Science* 3(1):59-67.
- Saputra, I.W.R.R., Restu, I.W., Pratiwi, M.A., 2017 Analisis kualitas air danau sebagai dasar perbaikan manajemen budidaya perikanan di Danau Buyan Kabupaten Buleleng, Provinsi Bali. *Ecotrophic* 11(1):1-7.
- Selanno, D.A.J., Tuhumury, N.C., Handoyo, F.M., 2016 Status kualitas air perikanan keramba jaring apung dalam pengelolaan sumberdaya perikanan di Teluk Ambon bagian dalam. *Triton* 12(1):42-60.
- Simbolon, A.R., 2016 Pencemaran bahan organik dan eutrofikasi di perairan Cituis, Pesisir Tangerang. *Pro-Life* 3(2):109-118.
- Syawal, M.S., Wardiatno, Y., Hariyadi, S., 2016 Pengaruh aktivitas antropogenik terhadap kualitas air, sedimen dan moluska di Danau Maninjau, Sumatera Barat. *Biologi Tropis* 16(1):1-14.
- Tatangindatu, F., Kalesaran, O., Rompas, R., 2013 Studi parameter fisika kimia air pada areal budidaya ikan di Danau Tondano, Desa Paleloan, Kabupaten Minahasa. *Budidaya Perairan* 1(2):8-19.
- Tokah, C., Undap, S.L., Longdong, S.N.J., 2017 Kajian kualitas air pada area budidaya kurungan jaring tancap (KJT) di danau Tutud Desa Tombatu Tiga Kecamatan Tombatu Kabupaten Minahasa Tenggara. *Budidaya Perairan* 5(1):1-11.
- Urbasa, P.A., Undap, S.L., Rompas, R.J., 2015 Dampak kualitas air pada budi daya ikan dengan jaring tancap di Desa Toulimembet Danau Tondano. *Budidaya Perairan* 3(1):59-67.
- Utomo, A.D., Wibowo, A., Mohtar, H., 2017 Pengelolaan sumberdaya perikanan di Kabupaten Ogan Komering Ulu (OKU) Selatan, Provinsi Sumatera Selatan. *Balai Riset Perikanan Perairan Umum dan Penyuluhan Perikanan Palembang*, Palembang, 142 p.
- Wadu, R.A., Ada, Y.S.B., Panggalo, I.U., 2017 Rancang bangun sistem sirkulasi air pada akuarium/bak ikan air tawar berdasarkan kekeruhan air secara otomatis. *Ilmiah FLASH* 3(1):1-10.
- Yulhadis, Tang, U.M., Nursyirwani, 2018 Analisis dampak lingkungan budidaya ikan dalam keramba di waduk sungai Paku Kecamatan Kampar Kiri Kabupaten Kampar. *Ilmu Lingkungan* 12(1):1-14.



Investigation of water quality in a tilapia (*Oreochromis niloticus*) culture area with embedded net cages in Warkuk Ranau Selatan District, Indonesia

¹Tiara Santeri, ²Mohamad Amin, ³Erna Yuliwati

¹ Environmental Management, Sriwijaya University, Palembang, Indonesia; ² Faculty of Agriculture, Sriwijaya University, Inderalaya, Indonesia; ³ Faculty of Engineering, Muhammadiyah University, Palembang, Indonesia. Corresponding author: M. Amin, mohamadamin@fp.unsri.ac.id

Abstract. The waters of Lake Ranau, Warkuk Ranau Selatan District, Indonesia, are an area suitable for the development of tilapia aquaculture using embedded net cages. Organic waste generated from aquaculture activities can decrease the quality of lake waters. The purpose of this study was to analyze the quality of the waters of Lake Ranau in Warkuk Ranau Selatan District. This research was conducted in January 2020. Analysis of water quality data used the Pollution Index method. The results showed that water quality parameters could be included in the good category, except for ammonia concentration at several stations, where values exceeded the quality standard. This is likely to occur because of excessive fish farming and settlement activities around the waters. Overall, the waters of Lake Ranau in the Warkuk Ranau Selatan District are still viable for tilapia aquaculture activities using embedded net cages.

Key Words: aquaculture, Lake Ranau, organic, viable parameters.

Introduction. Lake Ranau is one of the natural resources used in fish farming. It has long been used by local fishing communities in making a living (Makmur et al 2017). Lake Ranau is a place for Nile tilapia (*Oreochromis niloticus*) aquaculture using embedded net cages (KJT) by the communities near the lake. Communities in the region use KJT aquaculture activities as permanent or side livelihoods.

Based on the 2016 Data of Fishery Production in Warkuk Ranau Selatan District, 322 units of KJT produced 716 tons of tilapia. Fish farming with the KJT system greatly helps the economy and the welfare of the community. However, aquaculture production activities must still pay attention to the preservation of resources and the environment to create a sustainable cultivation area.

Organic waste generated from fish farming activities can decrease the quality of lake waters. The farming waste disperses into the waters, increasing nutrient levels and polluting the environment (Erlania 2010; Urbasa et al 2015; Tokah et al 2017). This is in accordance with Hidayah et al (2014), Muhaemi et al (2015), and Syawal et al (2016), that the water quality derivation is caused by various activities of the lakeshore communities and entrepreneurs.

The research results of Saputra et al (2017) also show the high values of ammonia, nitrate, and sulfide caused by the accumulation of several pollutant wastes from floating net cages (KJA) feed residue, local community waste, and agricultural activities around Lake Buyan. Good water quality will have a positive impact on the fish, ensuring the continuity of tilapia production supply in the desired amount, while poor water quality can cause fish growth and welfare to suffer.

Cultivation locations are a determinant component for successful tilapia farming at Warkuk Ranau Selatan District. It affects the sustainability of aquaculture activities and ecosystems in its area. The location of the cultivation is closely related to the water quality parameters supporting the cultivation process (Muhaemi et al 2015). The waste

Commented [u1]: please cite this document in the references too

materials generated by various human activities need to be considered because they affect the quality of the water physically, chemically, and biologically (Purwanto et al 2014; Novita et al 2015; Harianto & Efendi 2017). This study aimed to provide information about the quality of the waters of Lake Ranau in Warkuk Ranau Selatan District, Indonesia.

Material and Method

Study area. This research was conducted in January 2020 in Lake Ranau Waters, Warkuk Ranau Selatan District, South OKU Regency, South Sumatra Province, Indonesia (Figure 1). The sampling location was selected based on the difference of KJT surface: the waters of Gedung Ranau (station I) was the control location, with no KJT activity, Tanjung Jati (station II), with a KJT surface of 2900 m², Way Wangi Seminung (station III), with a KJT surface of 22005 m², whereas the Kota Batu (station IV), with a KJT surface of 37895 m².

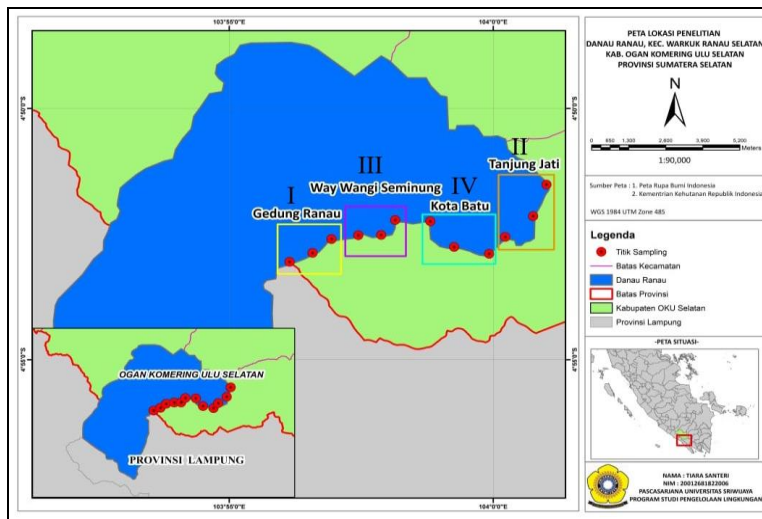


Figure 1. Research location.

Data collection. The data collected in this study consisted of primary and secondary data. Primary data collected included data on water quality measurements and market observations to determine the diversity of fish species in the Warkuk Ranau Selatan District market and its surroundings, while secondary data was obtained from relevant agencies, including general conditions of research stations, area maps, government regulations, and literature studies or other references in the form of journals, books, articles from prior research and other relevant data. Primary data collection was carried out *in-situ* (direct observation) and *ex-situ*, with analyses in the chemical laboratory of the Environmental Health Engineering Institute for Disease Control (BTKL-PP) and the biological laboratory of the Public Aquatic Fisheries Research and Fisheries Research Institute (BRPPUPP). *In-situ* data analysis included the determination of temperature, salinity, depth, brightness, turbidity, current speed, dissolved oxygen (DO), and pH. The *ex-situ* data analysis included determination of nitrate, nitrite, ammonia, phosphate, sulfide concentrations, and abundance of phytoplankton (Hasan et al 2016). The water samples were put into 2 L sample containers for the measurement of chemical parameters. The water samples for phytoplankton analysis were placed into 250 mL sample containers. At each station, water quality measurements were carried out 3 times, in 3 different places in the stations.

Commented [u2]: as previously asked, please mention how you determined each parameter (with what methods), and with what instruments?

Commented [u3]: as previously asked, please mention how you determined the abundance? shortly explain what instruments you used, how you counted the plankton?

Analysis of water quality based on the Pollution Index method. The data analysis of Lake Ranau water quality used the Pollution Index (PI) method. This index is used to determine the level of relative pollution to acceptable water quality parameters. Based on the Decree of the Minister of Environment No 115 of 2003 Annex II, the first step to calculate the PI value is comparing the concentration of each polluted parameter (Ci) with the quality standard (Li). Thus, the measurement results (Ci/Li) are obtained for each parameter. The PI value was calculated with the following equation:

$$PI_j = \sqrt{\frac{\left(\frac{C_i}{L_{ij}}\right)_M^2 + \left(\frac{C_i}{L_{ij}}\right)_R^2}{2}}$$

Where: PI_j - pollution index for the designation of j; C_i - concentration of water quality parameters i; L_{ij} - concentration of water quality parameters i listed in the water designation standard j; M - maximum; R - average.

The water quality assessment categories based on the pollution index value (PI_j) are as follows:

Table 1
Water quality classification from the US Environmental Protection Agency

Number	The Pollution Index Value	Category
1	0 ≤ PI _j ≤ 1	Meet the quality standard
2	1 < PI _j ≤ 5	Lightly polluted
3	5 < PI _j ≤ 10	Moderately polluted
4	PI _j > 10	Heavily polluted

Note: source: Environmental Protection Agency (1975).

Analysis of water quality for the development of Nile tilapia cultivation sites.

This analysis is needed to prepare, control, estimate the impact, and further manage the farming activities, to not pollute the environment. Water quality parameter criteria that support the development of tilapia aquaculture using KJT can be seen in Table 2.

Table 2
Criteria for water quality parameters at tilapia cultivation locations using embedded net cages

Parameters	Weight	Very Good	Score	Parameter Score			
				Medium	Score	Bad	Score
² Temperature (°C)	3	28-32	5	25-<28	3	<25	1
⁴ Brightness (m)	2	≥5	5	3-<5	3	<3	1
⁴ Turbidity (ntu)	2	≤5	5	5-30	3	>30	1
⁶ Depth (m)	1	>3	5	3-2	3	<2	1
⁵ Current speed (m s ⁻¹)	2	0-0.3	5	0.4-1	3	>1	1
² Dissolved oxygen (mg L ⁻¹)	3	>5	5	3-5	3	<3	1
⁶ pH	1	7-8	5	6.5-<7	3	<6.5->9	1
⁷ Ammonia (mg L ⁻¹)	1	<0.02	5	0.02-0.05	3	>0.05	1
³ Nitrate (mg L ⁻¹)	1	<2	5	2-5	3	>5	1
⁶ Nitrite (mg L ⁻¹)	1	<0.04	5	0.04-0.06	3	>0.06	1
³ Phosphate (mg L ⁻¹)	1	<1	5	1-2	3	>2	1
⁶ Sulfide (mg L ⁻¹)	1	<0.002	5	0.002-0.005	3	>0.005	1
¹ The abundance of phytoplankton (ind L ⁻¹)	1	≥15000	5	2000-15000	3	≤2000	1

Note: Astuti et al (2016)¹; Carman & Sucipto (2013)²; Haris & Yusanti (2019)³; Hartami (2008)⁴; Khairunnisa et al (2015)⁵; Muhaemi et al (2015)⁶; SNI 6139:2009⁷.

Muhaemi et al (2015) explained that the water quality characteristics can be calculated from the total score from the multiplication of the parameter value (A) with its weight

Commented [u4]: please cite this document in the references too; if you can, mention the following info when citing the reference:

- who emitted the document (the ministry)
- the year
- the title of the decree
- the number of pages if possible

- do this for all laws/decrees cited

Commented [u5]: please cite this document in the references too

(B), which is then used to determine the feasibility class of the Nile tilapia cultivation location:

$$\text{Total Scoring} = (\text{Total Score} / \text{Total Score Max}) \times 100$$

Based on these calculations, the score of the water feasibility was obtained as presented in Table 3.

Table 3

Water feasibility score

Number	Range of values (%)	Status
1	80-100	Very good
2	50-<80	Medium
3	<50	Bad

Note: source: Muhaemi et al (2015).

Statistic analysis. Data analysis was carried out by using the analysis of variance (ANOVA) to determine significant relationships or differences in water quality parameters influenced by the difference in the surface of KJT. Subsequent data processing was carried out by tabulating the data, and presented in the form of a trend graph based on the cage surface. Trend analysis was used to determine the changes in water quality parameters as a reflection of the effect of changes in the increase of the number of KJT in the waters of Lake Ranau.

Results and Discussion

Evaluation of water quality based on the STORET method. The value of the measurement results of the average water quality parameters during the observation are as follows in Table 4.

Table 4

The average value of the measurement results for water quality parameters

Parameters	Unit	Research Location			
		Gedung Ranau (Station 1)	Tanjung Jati (Station 2)	Way Wangi Seminung (Station 3)	Kota Batu (Station 4)
Temperature	°C	27.7	27.8	27.9	27.9
Brightness	m	4.48	3.32	3.17	3.07
Turbidity	ntu	0,84	0.92	0.95	1.41
Depth	m	8.17	4.72	3.97	3.81
Current speed	m s ⁻¹	0.08	0.084	0.087	0.085
Dissolved oxygen	mg L ⁻¹	3.1	3	2.9	2.9
pH		7.62	8.05	7.9	8.04
Ammonia	mg L ⁻¹	0.001	0.02	0.003	0.02
Nitrate	mg L ⁻¹	3.7	2.4	2.6	3.8
Nitrite	mg L ⁻¹	0.004	0.001	0.001	0.014
Phosphate	mg L ⁻¹	0.161	0.129	0.15	0.14
Sulfide	mg L ⁻¹	0	0	0	0
The abundance of phytoplankton	ind L ⁻¹	19817	20750	29883	15067

The results of data analysis from observations in the 4 stations in the waters of Lake Ranau have the scores presented in Table 5.

Table 5

Score of Lake Ranau water quality parameters based on the STORET method

Surface of embedded net cages	Stations	Total score	Quality status
0 m ²	I	0	Meet the quality standard
2900 m ²	II	0	Meet the quality standard
22005 m ²	III	0	Meet the quality standard
37895 m ²	IV	-2	Lightly polluted

Based on the results of calculations using the STORET method, it can be seen that the water quality conditions in Station I, Station II, and Station III still meet the quality standard. Meanwhile, Kota Batu has a total score of -2, included in Class B due to lightly polluted criteria with a value of -1 to -10. Pollution that occurs in Kota Batu is caused by ammonia concentrations that exceed the quality standard (0.03 mg L⁻¹).

The high KJT surface in Kota Batu is thought to cause ammonia pollution. Overfeeding and high excretion increase the ammonia concentration in Kota Batu waters. The remains of feed that settle to the bottom undergo a process of decay resulting in ammonia (Yulhadis et al 2018). Overall, the results of the analysis using the STORET method show that each station supports fixed KTJ activities, because the scores at the 4 stations are classified as good.

The effect of KJT on water quality. The temperature parameters at the study site ranged from 27.7 to 27.9°C. Figure 2 shows that the relationship between temperature and cage surface is strong (89%). Temperature is known to have a positive influence on KJT, a high temperature positively affecting the number of KJT in these waters. The temperature parameters in each fixed net cage were not different (p>0.05).

Based on Government Regulation No. 82 of 2001 (class II), the temperature range in these waters supports the survival of aquatic organisms, with a deviation of 3°C from the optimal value. Adawiyah et al (2018) stated that the temperature of water bodies is influenced by season, latitude, time of day, air circulation, cloud cover, flow and depth of water bodies. Optimal water temperature supporting the growth of Nile tilapia is 28°C (Tatangindatu et al 2013). According to Aliyas et al (2016), the water temperature will affect the appetite and metabolic processes of fish. The digestion in fish is slow when the temperature is low, whereas in warm temperatures the digestion is faster.

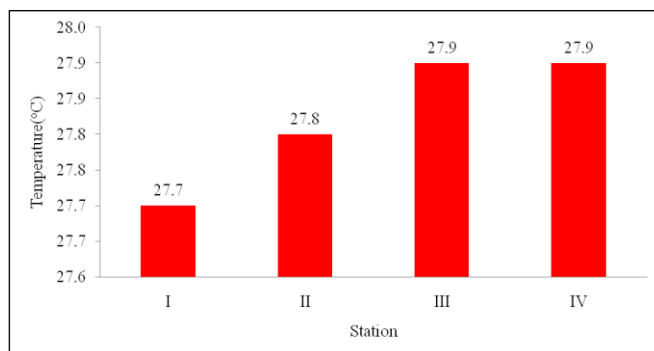


Figure 2. The temperatures in the 4 stations.

In general, the brightness in the waters of Lake Ranau is considered good for the growth of tilapia. According to Hasim et al (2015), the optimal value of water transparency for aquaculture in waters ranges from 20 to 40 cm. The water transparency in the 4 locations ranged from 3.07 m to 4.48 m.

From Figure 3, it can be seen that the brightness had a strong relationship with the cage surface (74.5%). Figure 3 indicates that the brightness is decreasing as the KJT activity increases in these waters. The contribution of waste from fish found in KJT can cause the turbidity to increase. The decrease in brightness level due to cage activity can be caused by suspended feed residue (Maniagasi et al 2013). The large number of anthropogenic activities carried by the current also causes low brightness.

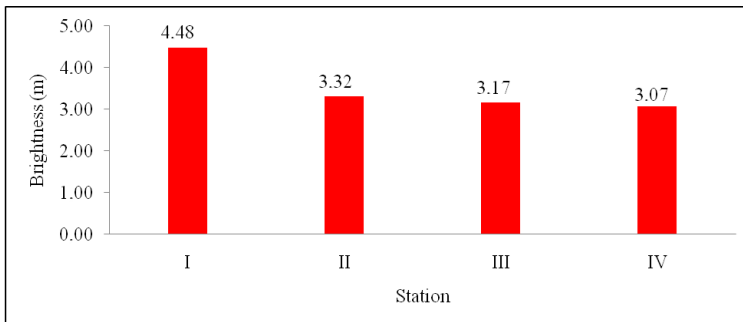


Figure 3. Brightness in the study stations.

Figure 4 shows that the level of water turbidity tended to be higher with increasing KJT activity, with a determination coefficient value of 76%. Thus, the relationship of turbidity to cage surface is strong. ANOVA test outputs show that the significance value is 0.004 ($p < 0.05$), a significant difference occurring in turbidity at the 4 observation stations. The level of water turbidity at each observation station ranges from 0.84 ntu to 1.41 ntu, in good limits for Nile tilapia.

The ideal turbidity value for fish farming should not exceed 5 ntu (Hartami 2008). The highest level of turbidity is at station 2 (Kota Batu), because of the highest surface of KJT. Cages provide a pollution load in the water, causing water turbidity (Saputra et al 2017). In addition, household waste dumped directly into water bodies result in high levels of turbidity in the waters.

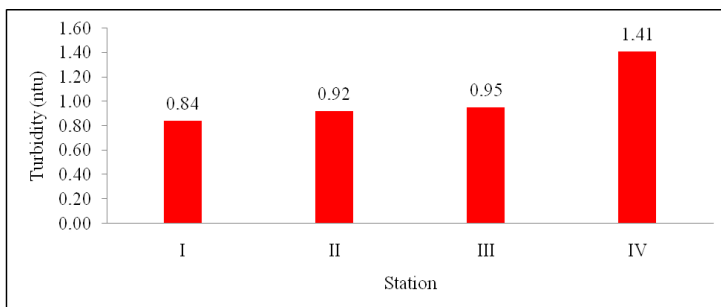


Figure 4. Turbidity in the 4 study stations.

Depth is one of the physical parameters that affect the brightness of the waters, the brightness being lower in deeper waters (Adawiyah et al 2018). The results of the depth measurement obtained in the waters of Lake Ranau are suitable for the life of Nile tilapia, the values ranging from 3.81 m to 8.17 m. Muhaemi et al (2015) stated that the ideal water depth for freshwater cage cultivation is at least 2 m. Space for the fish to move will increase with increasing water depth. The analysis of variance (ANOVA) shows that there was a significant difference ($p < 0.05$) in depth at the 4 KJT locations, denser KJT being

present in lower depths. Station IV is significantly different from station I, station II, and station III.

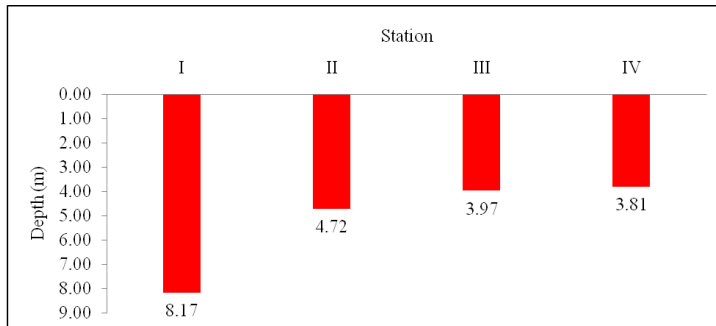


Figure 5. The depth in the 4 study locations.

The surface current speed values in the 4 stations do not have significant differences. The average current speeds range from 0.08 to 0.087 m s⁻¹ in the 4 stations, as presented in Figure 6. The current speed is slow and feasible for KJT activities. In general, lakes have calm water, the water moving at a very slow speed. Khairunnisa et al (2015) explained that the lake is classified into tapered waters, where generally the movement of water in the lake is limited due to the strength of the wind.

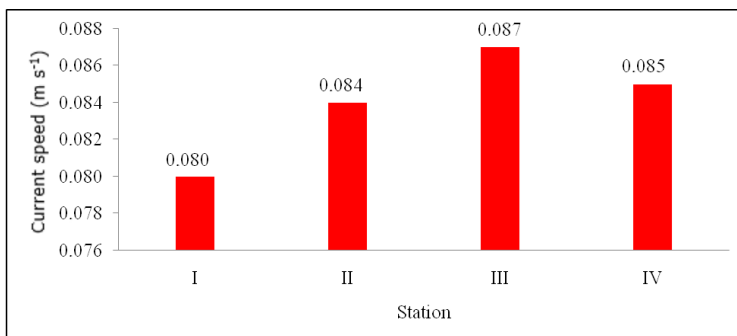


Figure 6. Current speed in the 4 stations.

DO is needed by all aquatic organisms for respiration, metabolic processes, or exchange of substances, helping the production of energy for growth and culture (Hamuna et al 2018). DO concentrations at the study sites ranged from 2.9 to 3.1 mg L⁻¹. The relationship between DO and cage surface is strong, the DO being higher with a lower KJT activity (Figure 7). However, the difference in DO at the observation stations was not significant ($p > 0.05$).

The DO concentration obtained indicates that the waters of Lake Ranau meet quality standards. The lowest DO concentration was found in Station III and Station IV, 2.9 mg L⁻¹. The results of Utomo et al (2017) also show that the DO content in Lake Ranau has a low number, with values ranging from 1.61 to 5.23 mg L⁻¹. The large number of fish farming activities using net cages in Stations IV and III and residential activities contribute to the low DO. Elfidasari et al (2015) stated that the decrease in DO levels is caused by a large amount of organic waste originating from activities in lake water bodies, especially fish farming activities and waste. According to the [Government](#)

Regulation 82 from 2001, the concentration of DO for fish farming should be at least 3 mg L⁻¹. The low DO in Stations III and IV is thought to have also been caused by the high temperature in these waters, DO levels decreasing in high temperatures (Adawiyah et al 2018).

Commented [u6]: please cite this in the references too

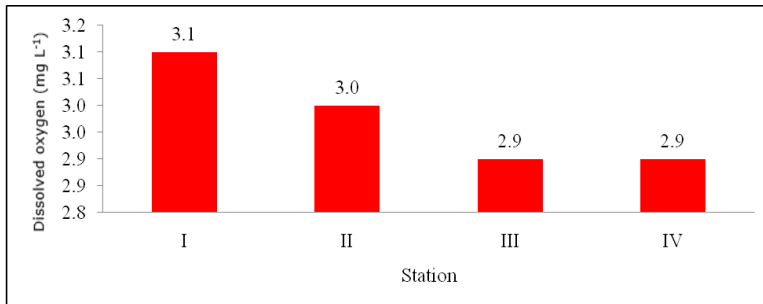


Figure 7. Dissolved oxygen in the 4 study stations.

The measurement results of the average pH values ranged from 7.62 to 8.05 in the 4 stations. Based on quality standards, the pH values in the waters of Lake Ranau do not exceed the quality standard set by Government Regulation 82 of 2001, namely 6 to 9. The pH value of lake water is good for Nile tilapia aquaculture. According to Muhaemi et al (2015), a good pH value for tilapia farming activities ranges from 6 to 9. The pH has a strong relationship with cage surface, where the water has a higher pH in areas with higher KJT activities (Figure 8). The entry of organic and inorganic waste into the waters can affect the pH value that comes from domestic activities and fish cultivation (Selanno et al 2016).

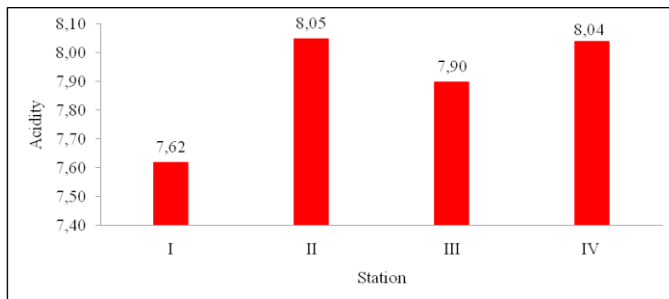


Figure 8. Water pH in the 4 stations.

The ammonia in Lake Ranau water ranged from 0.001 to 0.02 mg L⁻¹. Ammonia has a very strong relationship with cage surface, where the coefficient of determination is 1 (Figure 9). The more KJT activity means a greater excretion by the fish, which causes high ammonia content. The highest ammonia content was in Stations IV and II. Kota Batu (station 4) is the village with the most tilapia farming businesses using KJT, while in Tanjung Jati there are only a few KJT activities, but there are also KJA in the proximity, currents carrying some fish waste from them to the station. The ammonia value at each observation location is normal because it does not exceed the standard ammonia concentration permitted by Government Regulation No. 82 of 2001 for cultivation activities. The quality standard for ammonia was less than 0.02 mg L⁻¹. The content of free ammonia toxic to tilapia and that can cause fish death is between 0.1-0.2 mg L⁻¹ (Carman & Sucipto 2013).

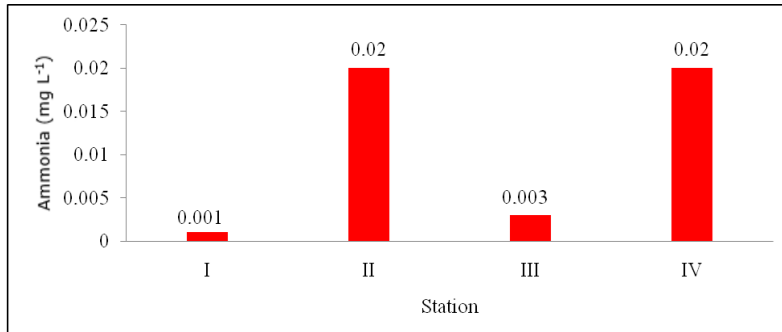


Figure 9. Ammonia content in the 4 stations.

The content of nitrate (NO₃) in the waters of Lake Ranau was relatively low, with averages between 2.4-3.8 mg L⁻¹. Government Regulation Number 82 from 2001 requires a nitrate content of less than 20 mg L⁻¹ for fishery activities. This shows that the nitrate content in these waters is not harmful to the life of tilapia. Based on Figure 10, the nitrate content appears to have a very strong relationship with cage surface, 99.2%.

The highest nitrate concentration occurs in the area with the highest KJT surface, namely Kota Batu (station 4). This can be influenced by the excess of feed waste, domestic waste, and fish waste, which is broken down by bacteria into inorganic material in the form of nitrate. Irhayim & Fotedar (2019) explained that uneaten feed is a source of nitrogen waste. Gedung Ranau, which did not have KJT activity, also had a high nitrate concentration after Kota Batu, presumably due to a large amount of domestic waste from the people living around the waters. This is in line with the research of Haris & Yusanti (2019), who describe the high nitrate due to pollution from human activities and animal feces.

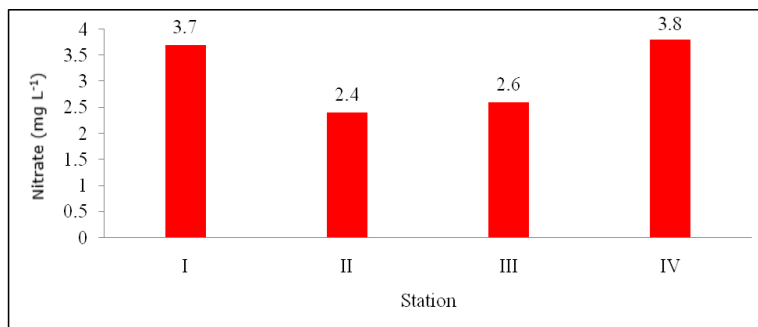


Figure 10. Nitrate concentrations in the 4 stations.

The content of nitrite at each station meets the quality standard requirements for water contamination of the Government Regulation Number 82 from 2001 regarding Class III water requirements, where the value range is from 0.001 to 0.014 mg L⁻¹. Figure 11 shows that the nitrite content of stations II and III is significantly different from the nitrite content at stations I and IV ($p < 0.05$). With more KJT activity, the nitrite concentration is higher. The highest nitrite content is in the waters of Stations IV and I. The high level of nitrite in station IV is closely related to the waste material from the metabolism of fish cultivated using KJT. The results of Tokah et al (2017) also show that high organic matter from fish farming increases the concentration of nitrite in the water.

Station IV is influenced by the large number of people who use these waters. The high population in the area is partially the cause of a large amount of domestic anorganic and organic waste discharged to water bodies. The high content of organic matter in the waters can cause eutrophication, reducing DO levels (Simbolon 2016).

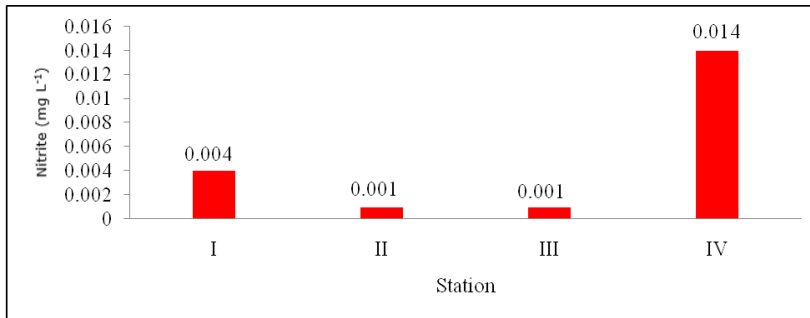


Figure 11. Nitrite concentrations in the 4 stations.

Sulfide (H₂S) can cause problems because it dissolves easily, it is toxic, and causes an unpleasant odor (Lihawa & Mahmud 2017). High sulfide concentrations will reduce DO levels in waters, resulting in fish mortality (Apendi et al 2019). The results of the analysis for the sulfide content in the waters of Lake Ranau show that the sulfide content was 0, meaning that it was following the quality standards as stated in Government Regulation Number 82 from 2001, which is less than 0.02 mg L⁻¹. This is thought to be due to the low decomposition of organic materials containing sulfur by anaerobic bacteria.

Phosphates at cultivation locations in the waters of Lake Ranau were in concentrations ranging from 0.129 to 0.161 mg L⁻¹. The phosphate content at the study sites did not vary significantly and had a very strong relationship with KJT (Figure 12). The phosphate values meet the quality standard value. According to Government Regulation Number 82 from 2001, the quality standard value for phosphate (PO₄) is less than 1 mg L⁻¹.

Haris & Yusanti (2019) stated that a phosphate content less than 1 mg L⁻¹ is good for developing cultivation activities. The highest phosphate content was found in the waters of the Gedung Ranau, which is the control location, without KJT activity. This is thought to have originated from the large number of settlements that produce organic waste. These waters as used for baths, wash, and toilet necessities by people who are living near the lake.

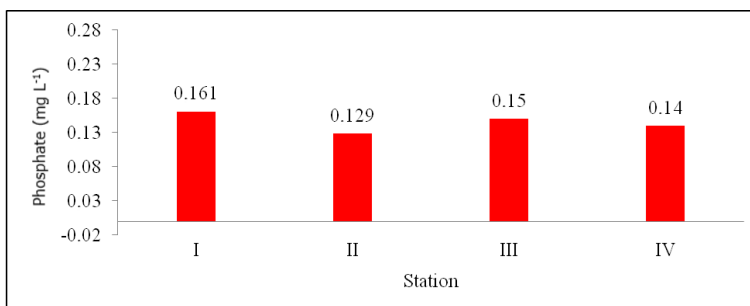


Figure 12. Phosphate concentrations in the 4 stations.

The phytoplankton found in the waters of Lake Ranau, Warkuk Ranau Selatan District consists of 30 genera from 3 classes: Bacillariophyceae, Chlorophyceae, and Cyanophyceae. Chlorophyceae class is the most common phytoplankton. Figure 13 shows that Way Wangi Seminung has the highest abundance of phytoplankton, which is thought to be due to the movement of water masses that carry nutrients in that location. Nutrient content, currents, wind, light, and predators are all factors that influence the presence of phytoplankton in a water body (Garno 2008; Juadi & Nurfadillah 2018). The abundance of phytoplankton in the waters of Lake Ranau is between 15067-29883 ind L⁻¹. Thus, these waters are eutrophic, but still support the life of aquatic organisms, especially fish. Eutrophic waters are waters with high fertility rates, where the abundance of phytoplankton is higher than 15000 ind L⁻¹ (EPA 1975).

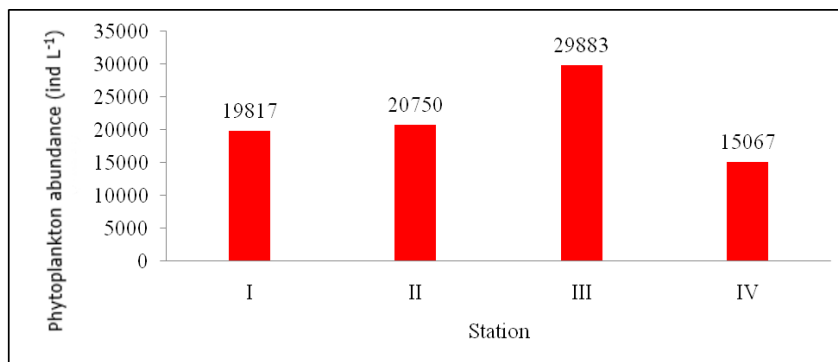


Figure 13. The abundance of phytoplankton in the 4 study stations.

Water quality status for the development of Nile tilapia farming locations. Based on the weighted results of the criteria for water quality parameters, the waters of Lake Ranau are good for Nile tilapia aquaculture activities.

Table 6
Status of water quality for the development of Nile tilapia cultivation locations in Ranau Lake watershed cages in Warkuk Ranau Selatan District, Indonesia

Station	Area	Total of Values	Status
I	Gedung Ranau	88	Very Good
II	Tanjung Jati	86	Very Good
III	Way Wangi Seminung	88	Very Good
IV	Kota Batu	86	Very Good

From the weighting and scoring results in the waters of Lake Ranau, the suitability score for Nile tilapia cultivation in Station IV is 86%, in Station II it is 86%, in Station III it is 88%, and in Station I it is 86%. Based on the results of the feasibility analysis, these waters are classified into the very good category to support the survival of Nile tilapia.

There are several parameters in these waters that need some attention to optimize Nile tilapia aquaculture. DO in Kota Batu (station 4) and Way Wangi Seminung (station III) is lower than in Tanjung Jati and Gedung Ranau for Nile tilapia aquaculture. A large number of KJT near the shore could have caused the low DO in both locations. The KJT trigger an increase in the organic waste, the decomposition process requiring oxygen, decreasing its levels (Simbolon 2016). Meanwhile, the brightness, ammonia, and nitrate parameters did not reach the optimal score, but they were still categorized as good for Nile tilapia aquaculture. A polluted aquatic environment makes Nile tilapia susceptible to disease (Abadi et al 2020). To maintain the tilapia habitat, more attention

is needed to the water quality parameters that do not reach the optimal score, so that Nile tilapia cultivation in KJT can be carried out properly.

Conclusions. The quality of the waters of Lake Ranau, Warkuk Ranau Selatan district is in a good category and supports fish farming activities. Water quality parameters generally meet class III water quality standards by the Government Regulation No. 82 of 2001, except for the ammonia at Station IV (Kota Batu) with the highest KJT surface, where the value exceeds the quality standard. The effect of water cage surface on some water quality parameters is strong. The relationships between temperature, DO, current speed, salinity, and sulfide parameters with cage surface are classified as weak or not significant.

The development of KJT in the waters of Lake Ranau, Warkuk Ranau Selatan District, Indonesia, is strategic for Nile tilapia fish farming activities. However, the number of KJT activities must still be limited and the zoning must be appropriate. The government, stakeholders, and the community need to protect these waters, to minimize anthropogenic waste, to reduce the pollution load originating from KJT in Lake Ranau.

References

- Abadi A. S., Hismayasari I. B., Supriatna I., Saidin, Yani A., Sayuti M., 2020 The mass death of Nile tilapia (*Oreochromis niloticus*) in Sorong District, West Papua, Indonesia. *AAFL Bioflux* 13(4):1906-1916.
- Adawiyah R., Laili S., Syaqui A., 2018 [The water quality of the Bengawanjero river in Bojoasri Village, Kalitengah District, Lamongan Regency]. *Ilmiah Biosaintropis* 3(32):1-9. [In Indonesian].
- Aliyas, Ndohe S., Ya'la Z. R., 2016 [Growth and survival of tilapia (*Oreochromis* sp.) maintained in saline media]. *Sains dan Teknologi Tadulako* 5(1):19-27.
- Apendi A., Ling T. Y., Nyanti L., Sim S. F., Grinang J., Lee K. S. P., Ganyai T., 2019 Impacts of sulfide exposure on juvenile *Tor tambroides*: behavioral responses and mortality. *AAFL Bioflux* 12(3):867-879.
- Astuti M. Y., Damai A. A., Supono, 2016 [Evaluation of the suitability of waters for tilapia (*Oreochromis niloticus*) cultivation in the coastal area of Kandang Besi Village, Kota Agung Barat District, Tanggamus Regency]. *Rekayasa dan Teknologi Budidaya Perairan* 5(1):621-630. [In Indonesian].
- Carman O., Sucipto A., 2013 [Growing tilapia in 2.5 months]. *Penebar Swadaya*, Jakarta, 100 p. [In Indonesian].
- Elfidasari D., Noriko N., Effendi Y., Puspitasari R. L., 2015 [Physical, chemical and biological analysis of water quality in Situ Lebak Wangi Bogor]. *Al-Azhar Indonesia Seri Sains dan Teknologi* 3(2):104-112. [In Indonesian].
- ***EPA (Environmental Protection Agency), 1975 Model state water monitoring program. Environmental Protection Agency, United States, 77 p.
- Erlania, 2010 [Control of aquaculture waste through the use of aquatic plants using a constructed wetland system]. *Media Akuakultur* 5(2):129-137. [In Indonesian].
- Garno Y. S., 2008 [Water quality and phytoplankton dynamics in the waters of Harapan Island]. *Hidrosfir Indonesia* 3(2):87-94. [In Indonesian].
- Hamuna B., Tanjung R. H. R., Suwito, Maury H. K., Alianto, 2018 [Study of sea water quality and pollution index based on physico-chemical parameters in Depapre District waters, Jayapura]. *Ilmu Lingkungan* 16(1):35-43. [In Indonesian].
- Harianto E., Efendi I., 2017 [Chemical and physical analysis of water for selecting the location of grouper (*Serranidae*) cultivation in Saleh Bay, Sumbawa Regency, West Nusa Tenggara using STORET method and multivariate analysis]. *Akuakultur Sungai dan Danau* 2(1):25-42. [In Indonesian].
- Haris R. B. K., Yusanti I. A., 2019 [Analysis of the suitability of waters for floating net cages in Sirah Pulau Padang District, Ogan Komering Ilir District, South Sumatra Province]. *Lahan Suboptimal* 8(1):20-30. [In Indonesian].


- Hartami P., 2008 [Analysis of the waters of Teluk Pelabuhan Ratu in the aquaculture area for floating net cage systems]. Institut Pertanian Bogor, Bogor, Indonesia, 161 p. [In Indonesian].
- Hasan H., Prasetyo E., Muthia S., 2016 [Analysis of Ambawang River water quality in Ambawang District, Kubu Raya Regency, for aquaculture]. *Ruaya* 4(2):2541-3155. [In Indonesian].
- Hasim, Koniyo Y., Kasim F., 2015 [Physico-chemical parameters of Limboto Lake waters as the basis for the development of freshwater aquaculture]. *Ilmiah Perikanan dan Kelautan* 3(4):130-136. [In Indonesian].
- Hidayah A. M., Purwanto, Soeprbowati T. R., 2014 [Bioconcentration of heavy metals Pb, Cd, Cr and Cu in tilapia (*Oreochromis niloticus* Linn.) in Rawa Pening Lake cages]. *BIOMA* 16(1):1-9. [In Indonesian].
- Irhayim T., Fotedar R., 2019 Effects of fish size and biofiltration techniques on water quality and nitrogen removal efficiency in recirculating aquaculture systems. *AACL Bioflux* 12(5):1606-1616.
- Juadi I. D., Nurfadillah, 2018 [The composition and abundance of phytoplankton in Ujong Pie waters, Muara Tiga District, Pidie Regency]. *Ilmiah Mahasiswa Kelautan dan Perikanan Unsyiah* 3(1):112-120. [In Indonesian].
- Khairunnisa, Barus T. A., Harahap Z. A., 2015 [Analysis of the suitability of an area for floating net cage fish cultivation in the waters of Girsang Sipangan Bolon, Lake Toba]. *Aquacoastmarine* 3(1):1-11. [In Indonesian].
- Lihawa F., Mahmud M., 2017 [Evaluation of the water quality characteristics of Limboto Lake]. *Pengelolaan Sumberdaya Alam dan Lingkungan* 7(3):260-266. [In Indonesian].
- Makmur S., Muthmainnah D., Subagdja, 2017 [Management of hampal fish (*Hampala macrolepidota* Kuhl & Van Hasselt 1823) in Lake Ranau, South Sumatra and Lampung]. *Kebijakan Perikanan Indonesia* 9(2):61-70. [In Indonesian].
- Maniagasi R., Tumembouw S. S., Mundeng Y., 2013 [Analysis of the physical and chemical quality of water in the Lake Tondano fish cultivation area, North Sulawesi Province]. *Budidaya Perairan* 1(2):29-37. [In Indonesian].
- Muhaemi, Tuhumury R., Siegers W., 2015 [The suitability of water quality for tilapia (*Oreochromis niloticus*) cages in Lake Sentani, East Sentani District, Jayapura Regency, Papua Province]. *Fisheries Development* 1(2):45-58. [In Indonesian].
- Novita M. Z., Soewardi K., Pratiwi N. T. M., 2015 [Determination of the carrying capacity of waters for natural fisheries (case study: Situ Cilala, Bogor Regency)]. *Ilmu Pertanian Indonesia (JIPI)* 20(1):66-71. [In Indonesian].
- Purwanto H., Pribadi T. A., Martuti N. K. T., 2014 [Community structure and fish distribution in the waters of the Juwana Pati river]. *Life Science* 3(1):59-67. [In Indonesian].
- Saputra I. W. R. R., Restu I. W., Pratiwi M. A., 2017 [Analysis of lake water quality as the basis for improving aquaculture management in Lake Buyan, Buleleng Regency, Bali Province]. *Ecotrophic* 11(1):1-7. [In Indonesian].
- Selanno D. A. J., Tuhumury N. C., Handoyo F. M., 2016 [Status of floating net cage fishery water quality in the management of fishery resources in the inner Ambon Bay]. *Triton* 12(1):42-60. [In Indonesian].
- Simbolon A. R., 2016 [Organic matter contamination and eutrophication in Cituis waters, Tangerang Coast]. *Pro-Life* 3(2):109-118. [In Indonesian].
- Syawal M. S., Wardiatno Y., Hariyadi S., 2016 [Effect of anthropogenic activities on water quality, sediment and mollusks in Lake Maninjau, West Sumatra]. *Biologi Tropis* 16(1):1-14. [In Indonesian].
- Tatangindatu F., Kalesaran O., Rompas R., 2013 [Study of water chemo-physical parameters in fish farming areas in Lake Tondano, Paleloan Village, Minahasa Regency]. *Budidaya Perairan* 1(2):8-19. [In Indonesian].
- Tokah C., Undap S. L., Longdong S. N. J., 2017 [Study of water quality in the cultivation area of fixed net cage (KJT) in Tutud lake, Tombatu Tiga Village, Tombatu District, Southeast Minahasa Regency]. *Budidaya Perairan* 5(1):1-11. [In Indonesian].

- Urbasa P. A., Undap S. L., Rompas R. J., 2015 [Impact of water quality on fixed-net cage fish farming in Toulimembet Village, Danau Tondano]. *Budidaya Perairan* 3(1):59-67. [In Indonesian].
- Utomo A. D., Wibowo A., Mohtar H., 2017 [Management of fishery resources in Ogan Komering Ulu (OKU) Selatan District, South Sumatra Province]. Research Institute for Public Aquatic Fisheries and Fisheries Extension in Palembang, Palembang, Indonesia, 142 p. [In Indonesian].
- Yulhadis, Tang U. M., Nursyirwani, 2018 [Analysis of the environmental impact of fish culture in cages in the Paku river reservoir, Kampar Kiri District, Kampar Regency]. *Ilmu Lingkungan* 12(1):1-14. [In Indonesian].

Authors:

Loke Hai Xin, School of Environmental and Natural Resource Sciences, Faculty of Science and Technology, National University of Malaysia, 43600 Bangi, Selangor, Malaysia, e-mail: lokehx@gmail.com
Kee Alfian Abdul Adzis, School of Environmental and Natural Resource Sciences, Faculty of Science and Technology, National University of Malaysia, 43600 Bangi, Selangor, Malaysia, e-mail: keealf@hotmail.com
Julian Hyde, Reef Check Malaysia, Suite 5.19-5.22, Box 606, Wisma Central, Jalan Ampang, 50450 Kuala Lumpur, Malaysia, e-mail: julian@reefcheck.org.my
Zaidi Che Cob, School of Environmental and Natural Resource Sciences, Faculty of Science and Technology, National University of Malaysia, 43600 Bangi, Selangor, Malaysia, e-mail: zdcc@ukm.edu.my

Commented [u7]: please add, as in the example below:
- the authors full names
- the affiliation
- the affiliation address
- the email address of each author



Investigation of water quality in a tilapia (*Oreochromis niloticus*) culture area with embedded net cages in Warkuk Ranau Selatan District, Indonesia

¹Tiara Santeri, ²Mohamad Amin, ³Erna Yuliwati

¹ Environmental Management, Sriwijaya University, Palembang, Indonesia; ² Faculty of Agriculture, Sriwijaya University, Inderalaya, Indonesia; ³ Faculty of Engineering, Muhammadiyah University, Palembang, Indonesia. Corresponding author: M. Amin, mohamadamin@fp.unsri.ac.id

Abstract. The waters of Lake Ranau, Warkuk Ranau Selatan District, Indonesia, are an area suitable for the development of tilapia aquaculture using embedded net cages. Organic waste generated from aquaculture activities can decrease the quality of lake waters. The purpose of this study was to analyze the quality of the waters of Lake Ranau in Warkuk Ranau Selatan District. This research was conducted in January 2020. Analysis of water quality data used the Pollution Index method. The results showed that water quality parameters could be included in the good category, except for ammonia concentration at several stations, where values exceeded the quality standard. This is likely to occur because of excessive fish farming and settlement activities around the waters. Overall, the waters of Lake Ranau in the Warkuk Ranau Selatan District are still viable for tilapia aquaculture activities using embedded net cages.

Key Words: aquaculture, Lake Ranau, organic, viable parameters.

Introduction. Lake Ranau is one of the natural resources used in fish farming. It has long been used by local fishing communities in making a living (Makmur et al 2017). Lake Ranau is a place for Nile tilapia (*Oreochromis niloticus*) aquaculture using embedded net cages (KJT) by the communities near the lake. Communities in the region use KJT aquaculture activities as permanent or side livelihoods.

Based on the 2016 Data of Fishery Production in Warkuk Ranau Selatan District, 322 units of KJT produced 716 tons of tilapia. Fish farming with the KJT system greatly helps the economy and the welfare of the community. However, aquaculture production activities must still pay attention to the preservation of resources and the environment to create a sustainable cultivation area.

Organic waste generated from fish farming activities can decrease the quality of lake waters. The farming waste disperses into the waters, increasing nutrient levels and polluting the environment (Erlania 2010; Urbasa et al 2015; Tokah et al 2017). This is in accordance with Hidayah et al (2014), Muhaemi et al (2015), and Syawal et al (2016), that the water quality derivation is caused by various activities of the lakeshore communities and entrepreneurs.

The research results of Saputra et al (2017) also show the high values of ammonia, nitrate, and sulfide caused by the accumulation of several pollutant wastes from floating net cages (KJA) feed residue, local community waste, and agricultural activities around Lake Buyan. Good water quality will have a positive impact on the fish, ensuring the continuity of tilapia production supply in the desired amount, while poor water quality can cause fish growth and welfare to suffer.

Cultivation locations are a determinant component for successful tilapia farming at Warkuk Ranau Selatan District. It affects the sustainability of aquaculture activities and ecosystems in its area. The location of the cultivation is closely related to the water quality parameters supporting the cultivation process (Muhaemi et al 2015). The waste

Commented [u1]: please cite this document in the references too
yes I have added it in the reference

materials generated by various human activities need to be considered because they affect the quality of the water physically, chemically, and biologically (Purwanto et al 2014; Novita et al 2015; Harianto & Efendi 2017). This study aimed to provide information about the quality of the waters of Lake Ranau in Warkuk Ranau Selatan District, Indonesia.

Material and Method

Study area. This research was conducted in January 2020 in Lake Ranau Waters, Warkuk Ranau Selatan District, South OKU Regency, South Sumatra Province, Indonesia (Figure 1). The sampling location was selected based on the difference of KJT surface: the waters of Gedung Ranau (station I) was the control location, with no KJT activity, Tanjung Jati (station II), with a KJT surface of 2900 m², Way Wangi Seminung (station III), with a KJT surface of 22005 m², whereas the Kota Batu (station IV), with a KJT surface of 37895 m².

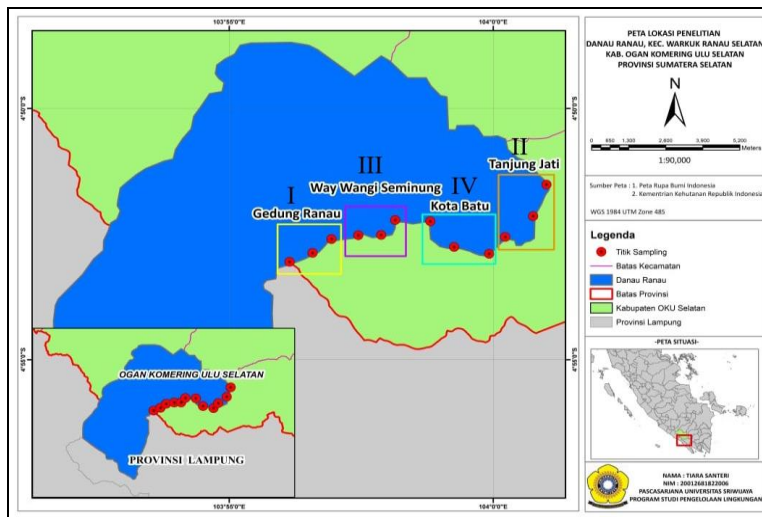


Figure 1. Research location.

Data collection. The data collected in this study consisted of primary and secondary data. Primary data collected included data on water quality measurements and market observations to determine the diversity of fish species in the Warkuk Ranau Selatan District market and its surroundings, while secondary data was obtained from relevant agencies, including general conditions of research stations, area maps, government regulations, and literature studies or other references in the form of journals, books, articles from prior research and other relevant data. Primary data collection was carried out *in-situ* (direct observation) and *ex-situ*, with analyses in the chemical laboratory of the Environmental Health Engineering Institute for Disease Control (BTKL-PP) and the biological laboratory of the Public Aquatic Fisheries Research and Fisheries Research Institute (BRPPUPP). *In-situ* data analysis included the determination of temperature, salinity, depth, brightness, turbidity, current speed, dissolved oxygen (DO), and pH. The *ex-situ* data analysis included determination of nitrate, nitrite, ammonia, phosphate, sulfide concentrations, and abundance of phytoplankton (Hasan et al 2016). The water samples were put into 2 L sample containers for the measurement of chemical parameters. The water samples for phytoplankton analysis were placed into 250 mL sample containers and dripped with 1% lugol. At each station, water quality measurements were carried out 3 times, in 3 different places in the stations.

Commented [u2]: as previously asked, please mention how you determined each parameter (with what methods), and with what instruments?
 yes I have added it to table 1

Commented [u3]: as previously asked, please mention how you determined the abundance? shortly explain what instruments you used, how you counted the plankton?
 yes I have added it

Table 1.

Lake Water Quality Analysis Method

Parameters	Analysis Method	Explanation
Temperature (°C)	SNI 06.6989.23-2005	Thermometer
Brightness (m)	Wetzel dan Likens (1991)	Secchi Disk
Turbidity (ntu)	SNI 06-6989.25-2005	Turbidimeter
Depth (m)	Wetzel dan Likens (1991)	Strappy Anchor
Current speed (m s ⁻¹)	SNI 03 2414-1991	Current Meter
Dissolved oxygen (mg L ⁻¹)	SNI 06.6989.14-2004	DO Meter
pH	SNI 06.6989.11-2004	pH Meter
Ammonia (mg L ⁻¹)	SNI 06-6989.30-2005	Laboratory
Nitrate (mg L ⁻¹)	SNI 06-2480.1991	Laboratory
Nitrite (mg L ⁻¹)	SNI 06-6989.9-2004	Laboratory
Phosphate (mg L ⁻¹)	SNI 06-6989.31-2005	Laboratory
Sulfide (mg L ⁻¹)	SNI 19-6964.4-2003	Laboratory
The abundance of phytoplankton (ind L ⁻¹)	APHA 10200 B - 2012	Plankton net

The abundance of phytoplankton type was calculated based on equations according to APHA (2012), as follows:

$$N = \frac{O_i}{O_p} \times \frac{V_r}{V_a} \times \frac{1}{V_r} \times \frac{n}{p}$$

Where: N - phytoplankton abundance; O_i - cover-glass area; O_p - view area; V_r - filtered water volume; V_o - observed water volume; n - number of phytoplankton in the entire view area; p - number of view areas.

Analysis of water quality based on the Pollution Index method. The data analysis of Lake Ranau water quality used the Pollution Index (PI) method. This index is used to determine the level of relative pollution to acceptable water quality parameters. Based on the Decree of the Minister of Environment No 115 of 2003 Annex II, the first step to calculate the PI value is comparing the concentration of each polluted parameter (C_i) with the quality standard (L_i). Thus, the measurement results (C_i/L_i) are obtained for each parameter. The PI value was calculated with the following equation:

$$PI_j = \sqrt{\frac{\left(\frac{C_i}{L_{ij}}\right)_M^2 + \left(\frac{C_i}{L_{ij}}\right)_R^2}{2}}$$

Where: PI_j - pollution index for the designation of j; C_i - concentration of water quality parameters i; L_{ij} - concentration of water quality parameters i listed in the water designation standard j; M - maximum; R - average.

The water quality assessment categories based on the pollution index value (PI_j) are as follows:

Table 2
Water quality classification from the US Environmental Protection Agency

Number	The Pollution Index Value	Category
1	0 ≤ PI _j ≤ 1	Meet the quality standard
2	1 < PI _j ≤ 5	Lightly polluted
3	5 < PI _j ≤ 10	Moderately polluted
4	PI _j > 10	Heavily polluted

Note: source: Environmental Protection Agency (1975).

Commented [u4]: please cite this document in the references too; if you can, mention the following info when citing the reference:

- who emitted the document (the ministry)
- the year
- the title of the decree
- the number of pages if possible
- do this for all laws/decrees cited

yes I have addet it to references

Analysis of water quality for the development of Nile tilapia cultivation sites.

This analysis is needed to prepare, control, estimate the impact, and further manage the farming activities, to not pollute the environment. Water quality parameter criteria that support the development of tilapia aquaculture using KJT can be seen in Table 3.

Table 3
Criteria for water quality parameters at tilapia cultivation locations using embedded net cages

Parameters	Weight	Very Good	Score	Parameter Score			
				Medium	Score	Bad	Score
² Temperature (°C)	3	28-32	5	25-<28	3	<25	1
⁴ Brightness (m)	2	≥5	5	3-<5	3	<3	1
⁴ Turbidity (ntu)	2	≤5	5	5-30	3	>30	1
⁶ Depth (m)	1	>3	5	3-2	3	<2	1
⁵ Current speed (m s ⁻¹)	2	0-0.3	5	0.4-1	3	>1	1
² Dissolved oxygen (mg L ⁻¹)	3	>5	5	3-5	3	< 3	1
⁶ pH	1	7-8	5	6.5-<7	3	<6.5->9	1
⁷ Ammonia (mg L ⁻¹)	1	<0.02	5	0.02-0.05	3	>0.05	1
³ Nitrate (mg L ⁻¹)	1	<2	5	2-5	3	>5	1
⁶ Nitrite (mg L ⁻¹)	1	<0.04	5	0.04-0.06	3	>0.06	1
³ Phosphate (mg L ⁻¹)	1	<1	5	1-2	3	>2	1
⁶ Sulfide (mg L ⁻¹)	1	<0.002	5	0.002-0.005	3	>0.005	1
¹ The abundance of phytoplankton (ind L ⁻¹)	1	≥15000	5	2000-15000	3	≤2000	1

Note: Astuti et al (2016)¹; Carman & Sucipto (2013)²; Haris & Yusanti (2019)³; Hartami (2008)⁴; Khairunnisa et al (2015)⁵; Muhaemi et al (2015)⁶; SNI 6139:2009⁷.

Muhaemi et al (2015) explained that the water quality characteristics can be calculated from the total score from the multiplication of the parameter value (A) with its weight (B), which is then used to determine the feasibility class of the Nile tilapia cultivation location:

$$\text{Total Scoring} = (\text{Total Score} / \text{Total Score Max}) \times 100$$

Based on these calculations, the score of the water feasibility was obtained as presented in Table 4.

Water feasibility score

Table 4

Number	Range of values (%)	Status
1	80-100	Very good
2	50-<80	Medium
3	<50	Bad

Note: source: Muhaemi et al (2015).

Statistic analysis. Data analysis was carried out by using the analysis of variance (ANOVA) to determine significant relationships or differences in water quality parameters influenced by the difference in the surface of KJT. Subsequent data processing was carried out by tabulating the data, and presented in the form of a trend graph based on the cage surface. Trend analysis was used to determine the changes in water quality parameters as a reflection of the effect of changes in the increase of the number of KJT in the waters of Lake Ranau.

Results and Discussion

Evaluation of water quality based on the Pollution Index method. The value of the measurement results of the average water quality parameters during the observation are as follows in Table 5.

Commented [u5]: please cite this document in the references too
yes, I have added it to references

Table 5

The average value of the measurement results for water quality parameters

Parameters	Unit	Research Location			
		Gedung Ranau (Station 1)	Tanjung Jati (Station 2)	Way Wangi Seminung (Station 3)	Kota Batu (Station 4)
Temperature	°C	27.7	27.8	27.9	27.9
Brightness	m	4.48	3.32	3.17	3.07
Turbidity	ntu	0.84	0.92	0.95	1.41
Depth	m	8.17	4.72	3.97	3.81
Current speed	m s ⁻¹	0.08	0.084	0.087	0.085
Dissolved oxygen	mg L ⁻¹	3.1	3	2.9	2.9
pH		7.62	8.05	7.9	8.04
Ammonia	mg L ⁻¹	0.001	0.02	0.003	0.02
Nitrate	mg L ⁻¹	3.7	2.4	2.6	3.8
Nitrite	mg L ⁻¹	0.004	0.001	0.001	0.014
Phosphate	mg L ⁻¹	0.161	0.129	0.15	0.14
Sulfide	mg L ⁻¹	0	0	0	0
The abundance of phytoplankton	ind L ⁻¹	19817	20750	29883	15067

The results of data analysis from observations in the 4 stations in the waters of Lake Ranau have the scores presented in Table 6.

Table 6

Score of Lake Ranau water quality parameters based on the Pollution Index method

Surface of embedded net cages	Stations	Total score	Quality status
0 m ²	I	0,66	Meet the quality standard
2900 m ²	II	0,75	Meet the quality standard
22005 m ²	III	0,71	Meet the quality standard
37895 m ²	IV	0,76	Meet the quality standard

Based on the results of calculations using the Pollution Index method, it can be seen that the water quality conditions in Station I, Station II, Station III and Station IV still meet the quality standard. Meanwhile, Kota Batu has a higher pollution index value than other stations. Pollution that occurs in Kota Batu is caused by ammonia concentrations that exceed the quality standard (0.03 mg L⁻¹).

The high KJT surface in Kota Batu is thought to cause ammonia pollution. Overfeeding and high excretion increase the ammonia concentration in Kota Batu waters. The remains of feed that settle to the bottom undergo a process of decay resulting in ammonia (Yulhadis et al 2018). Overall, the results of the analysis using the STORET method show that each station supports fixed KTJ activities, because the scores at the 4 stations are classified as good.

The effect of KJT on water quality. The temperature parameters at the study site ranged from 27.7 to 27.9°C. Figure 2 shows that the relationship between temperature and cage surface is strong (89%). Temperature is known to have a positive influence on KJT, a high temperature positively affecting the number of KJT in these waters. The temperature parameters in each fixed net cage were not different ($p > 0.05$).

Based on Government Regulation No. 82 of 2001 (class II), the temperature range in these waters supports the survival of aquatic organisms, with a deviation of 3°C from the optimal value. Adawiyah et al (2018) stated that the temperature of water bodies is influenced by season, latitude, time of day, air circulation, cloud cover, flow and depth of water bodies. Optimal water temperature supporting the growth of Nile tilapia is 28°C (Tatangindatu et al 2013). According to Aliyas et al (2016), the water temperature will

affect the appetite and metabolic processes of fish. The digestion in fish is slow when the temperature is low, whereas in warm temperatures the digestion is faster.

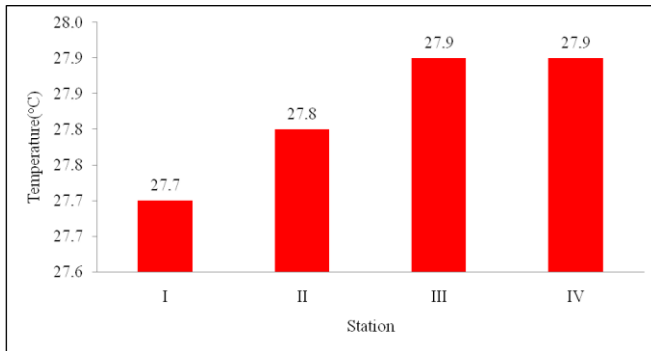


Figure 2. The temperatures in the 4 stations.

In general, the brightness in the waters of Lake Ranau is considered good for the growth of tilapia. According to Hasim et al (2015), the optimal value of water transparency for aquaculture in waters ranges from 20 to 40 cm. The water transparency in the 4 locations ranged from 3.07 m to 4.48 m.

From Figure 3, it can be seen that the brightness had a strong relationship with the cage surface (74.5%). Figure 3 indicates that the brightness is decreasing as the KJT activity increases in these waters. The contribution of waste from fish found in KJT can cause the turbidity to increase. The decrease in brightness level due to cage activity can be caused by suspended feed residue (Maniagasi et al 2013). The large number of anthropogenic activities carried by the current also causes low brightness.

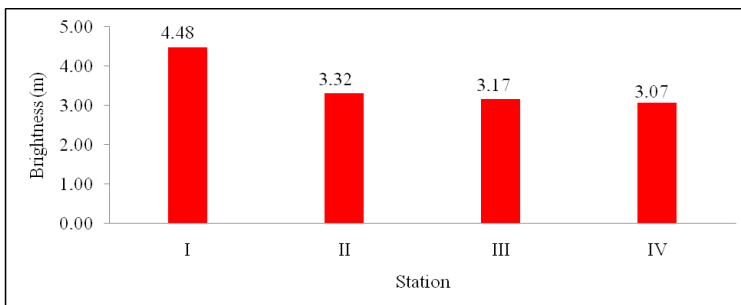


Figure 3. Brightness in the study stations.

Figure 4 shows that the level of water turbidity tended to be higher with increasing KJT activity, with a determination coefficient value of 76%. Thus, the relationship of turbidity to cage surface is strong. ANOVA test outputs show that the significance value is 0.004 ($p < 0.05$), a significant difference occurring in turbidity at the 4 observation stations. The level of water turbidity at each observation station ranges from 0.84 ntu to 1.41 ntu, in good limits for Nile tilapia.

The ideal turbidity value for fish farming should not exceed 5 ntu (Hartami 2008). The highest level of turbidity is at station 2 (Kota Batu), because of the highest surface of KJT. Cages provide a pollution load in the water, causing water turbidity (Saputra et al 2017). In addition, household waste dumped directly into water bodies result in high levels of turbidity in the waters.

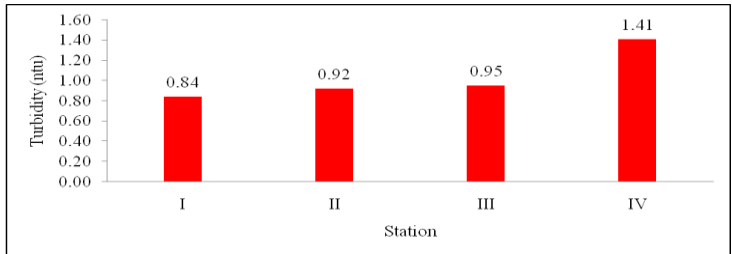


Figure 4. Turbidity in the 4 study stations.

Depth is one of the physical parameters that affect the brightness of the waters, the brightness being lower in deeper waters (Adawiyah et al 2018). The results of the depth measurement obtained in the waters of Lake Ranau are suitable for the life of Nile tilapia, the values ranging from 3.81 m to 8.17 m. Muhaemi et al (2015) stated that the ideal water depth for freshwater cage cultivation is at least 2 m. Space for the fish to move will increase with increasing water depth. The analysis of variance (ANOVA) shows that there was a significant difference ($p < 0.05$) in depth at the 4 KJT locations, denser KJT being present in lower depths. Station IV is significantly different from station I, station II, and station III.

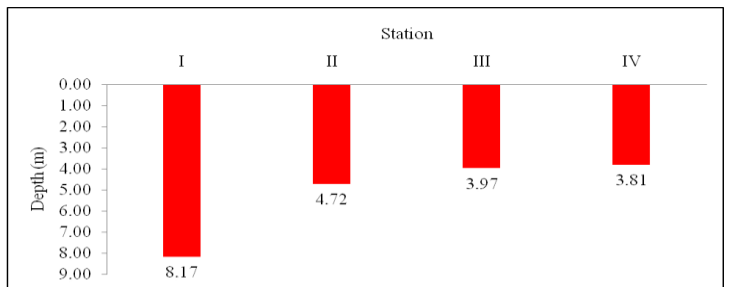


Figure 5. The depth in the 4 study locations.

The surface current speed values in the 4 stations do not have significant differences. The average current speeds range from 0.08 to 0.087 m s^{-1} in the 4 stations, as presented in Figure 6. The current speed is slow and feasible for KJT activities. In general, lakes have calm water, the water moving at a very slow speed. Khairunnisa et al (2015) explained that the lake is classified into tapered waters, where generally the movement of water in the lake is limited due to the strength of the wind.

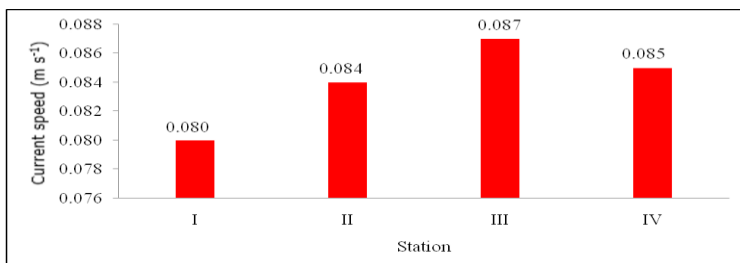


Figure 6. Current speed in the 4 stations.

DO is needed by all aquatic organisms for respiration, metabolic processes, or exchange of substances, helping the production of energy for growth and culture (Hamuna et al 2018). DO concentrations at the study sites ranged from 2.9 to 3.1 mg L⁻¹. The relationship between DO and cage surface is strong, the DO being higher with a lower KJT activity (Figure 7). However, the difference in DO at the observation stations was not significant ($p>0.05$).

The DO concentration obtained indicates that the waters of Lake Ranau meet quality standards. The lowest DO concentration was found in Station III and Station IV, 2.9 mg L⁻¹. The results of Utomo et al (2017) also show that the DO content in Lake Ranau has a low number, with values ranging from 1.61 to 5.23 mg L⁻¹. The large number of fish farming activities using net cages in Stations IV and III and residential activities contribute to the low DO. Elfidasari et al (2015) stated that the decrease in DO levels is caused by a large amount of organic waste originating from activities in lake water bodies, especially fish farming activities and waste. According to the Government Regulation 82 from 2001, the concentration of DO for fish farming should be at least 3 mg L⁻¹. The low DO in Stations III and IV is thought to have also been caused by the high temperature in these waters, DO levels decreasing in high temperatures (Adawiyah et al 2018).

Commented [u6]: please cite this in the references too
Yes I have added it to references

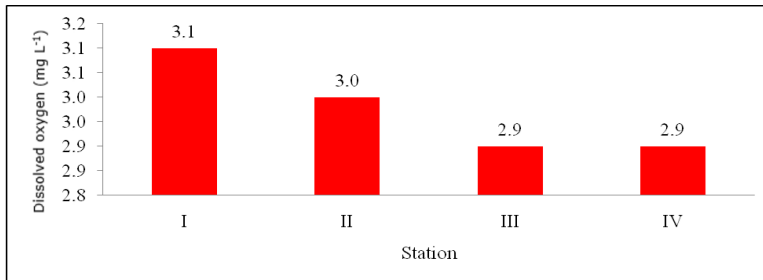


Figure 7. Dissolved oxygen in the 4 study stations.

The measurement results of the average pH values ranged from 7.62 to 8.05 in the 4 stations. Based on quality standards, the pH values in the waters of Lake Ranau do not exceed the quality standard set by Government Regulation 82 of 2001, namely 6 to 9. The pH value of lake water is good for Nile tilapia aquaculture. According to Muhaemi et al (2015), a good pH value for tilapia farming activities ranges from 6 to 9. The pH has a strong relationship with cage surface, where the water has a higher pH in areas with higher KJT activities (Figure 8). The entry of organic and inorganic waste into the waters can affect the pH value that comes from domestic activities and fish cultivation (Selanno et al 2016).

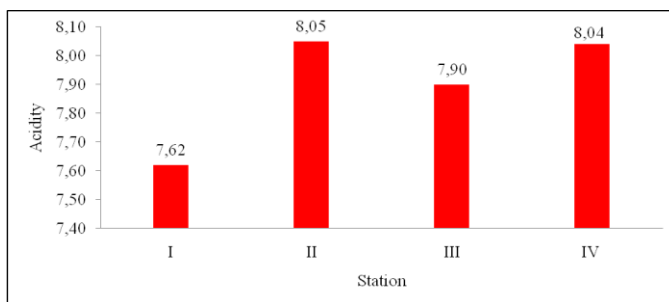


Figure 8. Water pH in the 4 stations.

The ammonia in Lake Ranau water ranged from 0.001 to 0.02 mg L⁻¹. Ammonia has a very strong relationship with cage surface, where the coefficient of determination is 1 (Figure 9). The more KJT activity means a greater excretion by the fish, which causes high ammonia content. The highest ammonia content was in Stations IV and II. Kota Batu (station 4) is the village with the most tilapia farming businesses using KJT, while in Tanjung Jati there are only a few KJT activities, but there are also KJA in the proximity, currents carrying some fish waste from them to the station. The ammonia value at each observation location is normal because it does not exceed the standard ammonia concentration permitted by Government Regulation No. 82 of 2001 for cultivation activities. The quality standard for ammonia was less than 0.02 mg L⁻¹. The content of free ammonia toxic to tilapia and that can cause fish death is between 0.1-0.2 mg L⁻¹ (Carman & Sucipto 2013).

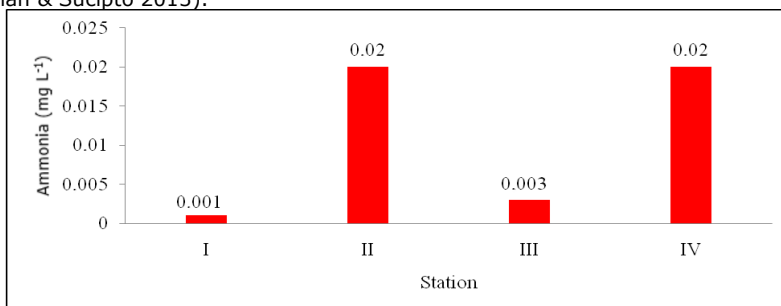


Figure 9. Ammonia content in the 4 stations.

The content of nitrate (NO₃) in the waters of Lake Ranau was relatively low, with averages between 2.4-3.8 mg L⁻¹. Government Regulation Number 82 from 2001 requires a nitrate content of less than 20 mg L⁻¹ for fishery activities. This shows that the nitrate content in these waters is not harmful to the life of tilapia. Based on Figure 10, the nitrate content appears to have a very strong relationship with cage surface, 99.2%.

The highest nitrate concentration occurs in the area with the highest KJT surface, namely Kota Batu (station 4). This can be influenced by the excess of feed waste, domestic waste, and fish waste, which is broken down by bacteria into inorganic material in the form of nitrate. Irhayyim & Fotedar (2019) explained that uneaten feed is a source of nitrogen waste. Gedung Ranau, which did not have KJT activity, also had a high nitrate concentration after Kota Batu, presumably due to a large amount of domestic waste from the people living around the waters. This is in line with the research of Haris & Yusanti (2019), who describe the high nitrate due to pollution from human activities and animal feces.

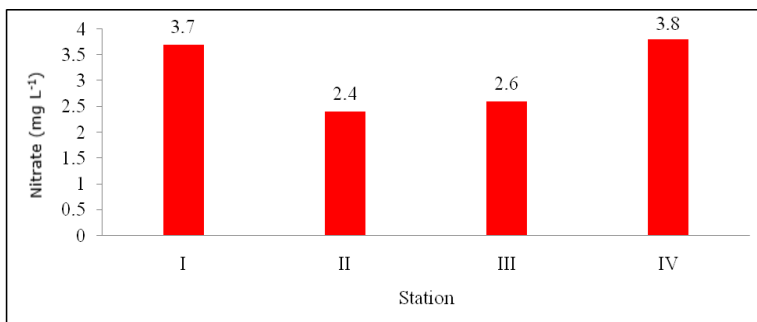


Figure 10. Nitrate concentrations in the 4 stations.

The content of nitrite at each station meets the quality standard requirements for water contamination of the Government Regulation Number 82 from 2001 regarding Class III water requirements, where the value range is from 0.001 to 0.014 mg L⁻¹. Figure 11 shows that the nitrite content of stations II and III is significantly different from the nitrite content at stations I and IV ($p < 0.05$). With more KJT activity, the nitrite concentration is higher. The highest nitrite content is in the waters of Stations IV and I. The high level of nitrite in station IV is closely related to the waste material from the metabolism of fish cultivated using KJT. The results of Tokah et al (2017) also show that high organic matter from fish farming increases the concentration of nitrite in the water.

Station IV is influenced by the large number of people who use these waters. The high population in the area is partially the cause of a large amount of domestic anorganic and organic waste discharged to water bodies. The high content of organic matter in the waters can cause eutrophication, reducing DO levels (Simbolon 2016).

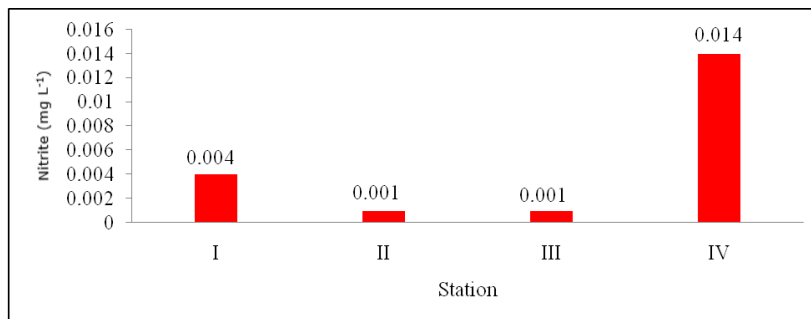


Figure 11. Nitrite concentrations in the 4 stations.

Sulfide (H₂S) can cause problems because it dissolves easily, it is toxic, and causes an unpleasant odor (Lihawa & Mahmud 2017). High sulfide concentrations will reduce DO levels in waters, resulting in fish mortality (Apendi et al 2019). The results of the analysis for the sulfide content in the waters of Lake Ranau show that the sulfide content was 0, meaning that it was following the quality standards as stated in Government Regulation Number 82 from 2001, which is less than 0.02 mg L⁻¹. This is thought to be due to the low decomposition of organic materials containing sulfur by anaerobic bacteria.

Phosphates at cultivation locations in the waters of Lake Ranau were in concentrations ranging from 0.129 to 0.161 mg L⁻¹. The phosphate content at the study sites did not vary significantly and had a very strong relationship with KJT (Figure 12). The phosphate values meet the quality standard value. According to Government Regulation Number 82 from 2001, the quality standard value for phosphate (PO₄) is less than 1 mg L⁻¹.

Haris & Yusanti (2019) stated that a phosphate content less than 1 mg L⁻¹ is good for developing cultivation activities. The highest phosphate content was found in the waters of the Gedung Ranau, which is the control location, without KJT activity. This is thought to have originated from the large number of settlements that produce organic waste. These waters as used for baths, wash, and toilet necessities by people who are living near the lake.

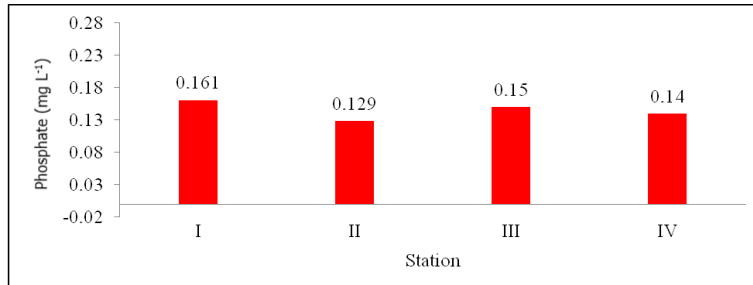


Figure 12. Phosphate concentrations in the 4 stations.

The phytoplankton found in the waters of Lake Ranau, Warkuk Ranau Selatan District consists of 30 genera from 3 classes: Bacillariophyceae, Chlorophyceae, and Cyanophyceae. Chlorophyceae class is the most common phytoplankton. Figure 13 shows that Way Wangi Seminung has the highest abundance of phytoplankton, which is thought to be due to the movement of water masses that carry nutrients in that location. Nutrient content, currents, wind, light, and predators are all factors that influence the presence of phytoplankton in a water body (Garno 2008; Juadi & Nurfadillah 2018). The abundance of phytoplankton in the waters of Lake Ranau is between 15067-29883 ind L⁻¹. Thus, these waters are eutrophic, but still support the life of aquatic organisms, especially fish. Eutrophic waters are waters with high fertility rates, where the abundance of phytoplankton is higher than 15000 ind L⁻¹ (EPA 1975).

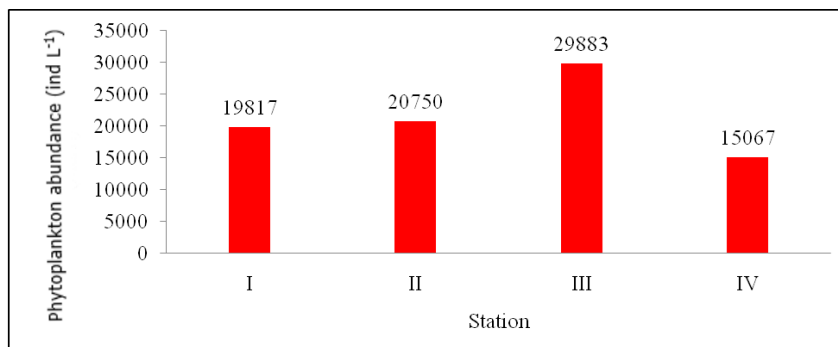


Figure 13. The abundance of phytoplankton in the 4 study stations.

Water quality status for the development of Nile tilapia farming locations. Based on the weighted results of the criteria for water quality parameters, the waters of Lake Ranau are good for Nile tilapia aquaculture activities.

Table 7
Status of water quality for the development of Nile tilapia cultivation locations in Ranau Lake watershed cages in Warkuk Ranau Selatan District, Indonesia

Station	Area	Total of Values	Status
I	Gedung Ranau	88	Very Good
II	Tanjung Jati	86	Very Good
III	Way Wangi Seminung	88	Very Good
IV	Kota Batu	86	Very Good

From the weighting and scoring results in the waters of Lake Ranau, the suitability score for Nile tilapia cultivation in Station IV is 86%, in Station II it is 86%, in Station III it is 88%, and in Station I it is 86%. Based on the results of the feasibility analysis, these waters are classified into the very good category to support the survival of Nile tilapia.

There are several parameters in these waters that need some attention to optimize Nile tilapia aquaculture. DO in Kota Batu (station 4) and Way Wangi Seminung (station III) is lower than in Tanjung Jati and Gedung Ranau for Nile tilapia aquaculture. A large number of KJT near the shore could have caused the low DO in both locations. The KJT trigger an increase in the organic waste, the decomposition process requiring oxygen, decreasing its levels (Simbolon 2016). Meanwhile, the brightness, ammonia, and nitrate parameters did not reach the optimal score, but they were still categorized as good for Nile tilapia aquaculture. A polluted aquatic environment makes Nile tilapia susceptible to disease (Abadi et al 2020). To maintain the tilapia habitat, more attention is needed to the water quality parameters that do not reach the optimal score, so that Nile tilapia cultivation in KJT can be carried out properly.

Conclusions. The quality of the waters of Lake Ranau, Warkuk Ranau Selatan district is in a good category and supports fish farming activities. Water quality parameters generally meet class III water quality standards by the Government Regulation No. 82 of 2001, except for the ammonia at Station IV (Kota Batu) with the highest KJT surface, where the value exceeds the quality standard. The effect of water cage surface on some water quality parameters is strong. The relationships between temperature, DO, current speed, salinity, and sulfide parameters with cage surface are classified as weak or not significant.

The development of KJT in the waters of Lake Ranau, Warkuk Ranau Selatan District, Indonesia, is strategic for Nile tilapia fish farming activities. However, the number of KJT activities must still be limited and the zoning must be appropriate. The government, stakeholders, and the community need to protect these waters, to minimize anthropogenic waste, to reduce the pollution load originating from KJT in Lake Ranau.

References

- Abadi A. S., Hismayasari I. B., Supriatna I., Saidin, Yani A., Sayuti M., 2020 The mass death of Nile tilapia (*Oreochromis niloticus*) in Sorong District, West Papua, Indonesia. *AAFL Bioflux* 13(4):1906-1916.
- Adawiyah R., Laili S., Syaumi A., 2018 [The water quality of the Bengawanjero river in Bojoasri Village, Kalitengah District, Lamongan Regency]. *Ilmiah Biosaintropis* 3(32):1-9. [In Indonesian].
- Aliyas, Ndobe S., Ya'la Z. R., 2016 [Growth and survival of tilapia (*Oreochromis* sp.) maintained in saline media]. *Sains dan Teknologi Tadulako* 5(1):19-27.
- Apendi A., Ling T. Y., Nyanti L., Sim S. F., Grinang J., Lee K. S. P., Ganyai T., 2019 Impacts of sulfide exposure on juvenile *Tor tambroides*: behavioral responses and mortality. *AAFL Bioflux* 12(3):867-879.
- APHA (American Public Health Association), 2012 Standard method for the examination of water and wastewater. 22th edition, APHA, Washington DC.
- Astuti M. Y., Damai A. A., Supono, 2016 [Evaluation of the suitability of waters for tilapia (*Oreochromis niloticus*) cultivation in the coastal area of Kandang Besi Village, Kota Agung Barat District, Tanggamus Regency]. *Rekayasa dan Teknologi Budidaya Perairan* 5(1):621-630. [In Indonesian].
- Carman O., Sucipto A., 2013 [Growing tilapia in 2.5 months]. Penebar Swadaya, Jakarta, 100 p. [In Indonesian].
- Decree of the State Minister for the Environment. 2003. Guidelines for Determining Water Quality Status. Number 115 of 2003.
- Dinas Perikanan dan Peternakan Kabupaten OKU Selatan. 2016. Data Statistik Produksi Perikanan Tangkap Kabupaten OKU Selatan. OKU Selatan : Dinas Perikanan dan Peternakan Kabupaten OKU Selatan.

- Elfidasari D., Noriko N., Effendi Y., Puspitasari R. L., 2015 [Physical, chemical and biological analysis of water quality in Situ Lebak Wangi Bogor]. *Al-Azhar Indonesia Seri Sains dan Teknologi* 3(2):104-112. [In Indonesian].
- ***EPA (Environmental Protection Agency), 1975 Model state water monitoring program. Environmental Protection Agency, United States, 77 p.
- Erlania, 2010 [Control of aquaculture waste through the use of aquatic plants using a constructed wetland system]. *Media Akuakultur* 5(2):129-137. [In Indonesian].
- Garno Y. S., 2008 [Water quality and phytoplankton dynamics in the waters of Harapan Island]. *Hidrosfir Indonesia* 3(2):87-94. [In Indonesian].
- *** Government Regulation No. 82, 2001 Management of water quality and control over water pollution. Jakarta, Indonesia, December 14, 2001, 10 pp.
- Hamuna B., Tanjung R. H. R., Suwito, Maury H. K., Alianto, 2018 [Study of sea water quality and pollution index based on physico-chemical parameters in Depapre District waters, Jayapura]. *Ilmu Lingkungan* 16(1):35-43. [In Indonesian].
- Harianto E., Efendi I., 2017 [Chemical and physical analysis of water for selecting the location of grouper (*Serranidae*) cultivation in Saleh Bay, Sumbawa Regency, West Nusa Tenggara using STORET method and multivariate analysis]. *Akuakultur Sungai dan Danau* 2(1):25-42. [In Indonesian].
- Haris R. B. K., Yusanti I. A., 2019 [Analysis of the suitability of waters for floating net cages in Sirah Pulau Padang District, Ogan Komering Ilir District, South Sumatra Province]. *Lahan Suboptimal* 8(1):20-30. [In Indonesian].
- Hartami P., 2008 [Analysis of the waters of Teluk Pelabuhan Ratu in the aquaculture area for floating net cage systems]. Institut Pertanian Bogor, Bogor, Indonesia, 161 p. [In Indonesian].
- Hasan H., Prasetyo E., Muthia S., 2016 [Analysis of Ambawang River water quality in Ambawang District, Kubu Raya Regency, for aquaculture]. *Ruaya* 4(2):2541-3155. [In Indonesian].
- Hasim, Koniyo Y., Kasim F., 2015 [Physico-chemical parameters of Limboto Lake waters as the basis for the development of freshwater aquaculture]. *Ilmiah Perikanan dan Kelautan* 3(4):130-136. [In Indonesian].
- Hidayah A. M., Purwanto, Soeprobawati T. R., 2014 [Bioconcentration of heavy metals Pb, Cd, Cr and Cu in tilapia (*Oreochromis niloticus* Linn.) in Rawa Pening Lake cages]. *BIOMA* 16(1):1-9. [In Indonesian].
- Irhayyim T., Fotedar R., 2019 Effects of fish size and biofiltration techniques on water quality and nitrogen removal efficiency in recirculating aquaculture systems. *AACL Bioflux* 12(5):1606-1616.
- Juadi I. D., Nurfadillah, 2018 [The composition and abundance of phytoplankton in Ujong Pie waters, Muara Tiga District, Pidie Regency]. *Ilmiah Mahasiswa Kelautan dan Perikanan Unsyiah* 3(1):112-120. [In Indonesian].
- Khairunnisa, Barus T. A., Harahap Z. A., 2015 [Analysis of the suitability of an area for floating net cage fish cultivation in the waters of Girsang Sipangan Bolon, Lake Toba]. *Aquacoastmarine* 3(1):1-11. [In Indonesian].
- Lihawa F., Mahmud M., 2017 [Evaluation of the water quality characteristics of Limboto Lake]. *Pengelolaan Sumberdaya Alam dan Lingkungan* 7(3):260-266. [In Indonesian].
- Makmur S., Muthmainnah D., Subagdja, 2017 [Management of hampal fish (*Hampala macrolepidota* Kuhl & Van Hasselt 1823) in Lake Ranau, South Sumatra and Lampung]. *Kebijakan Perikanan Indonesia* 9(2):61-70. [In Indonesian].
- Maniagasi R., Tumembouw S. S., Mundeng Y., 2013 [Analysis of the physical and chemical quality of water in the Lake Tondano fish cultivation area, North Sulawesi Province]. *Budidaya Perairan* 1(2):29-37. [In Indonesian].
- Muhaemi, Tuhumury R., Siegers W., 2015 [The suitability of water quality for tilapia (*Oreochromis niloticus*) cages in Lake Sentani, East Sentani District, Jayapura Regency, Papua Province]. *Fisheries Development* 1(2):45-58. [In Indonesian].
- Novita M. Z., Soewardi K., Pratiwi N. T. M., 2015 [Determination of the carrying capacity of waters for natural fisheries (case study: Situ Cilala, Bogor Regency)]. *Ilmu Pertanian Indonesia (JIPI)* 20(1):66-71. [In Indonesian].

- Purwanto H., Pribadi T. A., Martuti N. K. T., 2014 [Community structure and fish distribution in the waters of the Juwana Pati river]. *Life Science* 3(1):59-67. [In Indonesian].
- Saputra I. W. R. R., Restu I. W., Pratiwi M. A., 2017 [Analysis of lake water quality as the basis for improving aquaculture management in Lake Buyan, Buleleng Regency, Bali Province]. *Ecotrophic* 11(1):1-7. [In Indonesian].
- Selanno D. A. J., Tuhumury N. C., Handoyo F. M., 2016 [Status of floating net cage fishery water quality in the management of fishery resources in the inner Ambon Bay]. *Triton* 12(1):42-60. [In Indonesian].
- Simbolon A. R., 2016 [Organic matter contamination and eutrophication in Cituis waters, Tangerang Coast]. *Pro-Life* 3(2):109-118. [In Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 1991, [Method of measurement of river debit and open channel]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 1991, [The method of testing nitrate levels in water is using a brucine sulfate spectrophotometer]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2003, [Seawater quality - Part 1: How to test for nitrite (NO₂-N) with sulfanilamide by spectrophotometry]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2004, [Water and wastewater - Part 9: How to test for nitrite (NO₂-N) by spectrophotometry]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2004, [Water and wastewater - Part 11: How to test the degree of acidity (pH) using a pH meter]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2004, [Water and wastewater - Part 14: How to test for dissolved oxygen byodometric (modified azide)]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2005, [Water and wastewater - Part 23: How to test temperature with a thermometer]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2005, [Water and wastewater - Part 25: Method of turbidity test with a nephelometer]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2005, [Water and wastewater - Part 30: Test methods of ammonia content with spectrophotometers by phenates]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2005, [Water and wastewater - Part 31: How to test phosphate levels with a spectrophotometer using ascorbic acid]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- SNI (Standardisasi Nasional Indonesia) [Indonesia National Standard], 2009, [Production of broodstock black tilapia (*Oreochromis niloticus* Bleeker) primary main class]. Badan Standardisasi Nasional, Jakarta [in Indonesian].
- Syawal M. S., Wardiatno Y., Hariyadi S., 2016 [Effect of anthropogenic activities on water quality, sediment and mollusks in Lake Maninjau, West Sumatra]. *Biologi Tropis* 16(1):1-14. [In Indonesian].
- Tatangindatu F., Kalesaran O., Rompas R., 2013 [Study of water chemo-physical parameters in fish farming areas in Lake Tondano, Paleloan Village, Minahasa Regency]. *Budidaya Perairan* 1(2):8-19. [In Indonesian].
- Tokah C., Undap S. L., Longdong S. N. J., 2017 [Study of water quality in the cultivation area of fixed net cage (KJT) in Tutud lake, Tombatu Tiga Village, Tombatu District, Southeast Minahasa Regency]. *Budidaya Perairan* 5(1):1-11. [In Indonesian].
- Urbasa P. A., Undap S. L., Rompas R. J., 2015 [Impact of water quality on fixed-net cage fish farming in Toulimembet Village, Danau Tondano]. *Budidaya Perairan* 3(1):59-67. [In Indonesian].

Utomo A. D., Wibowo A., Mohtar H., 2017 [Management of fishery resources in Ogan Komering Ulu (OKU) Selatan District, South Sumatra Province]. Research Institute for Public Aquatic Fisheries and Fisheries Extension in Palembang, Palembang, Indonesia, 142 p. [In Indonesian].

Wetzel, R. G., Likens, G. E., 1991. [Limnological Analysis : Second Edition]. Springer Verlag, New York.

Yulhadis, Tang U. M., Nursyirwani, 2018 [Analysis of the environmental impact of fish culture in cages in the Paku river reservoir, Kampar Kiri District, Kampar Regency]. Ilmu Lingkungan 12(1):1-14. [In Indonesian].

Authors:


Tiara Santeri, School of Environmental Management, Faculty of Graduate Program, University of Sriwijaya, Bukit Besar, Jl. Padang Selasa No.524, Bukit Lama, Kec. Ilir Bar. I, South Sumatra 30139, Palembang, e-mail: tiarasanteri@gmail.com

Mohamad Amin, School of Aquaculture, Faculty of Agriculture, University of Sriwijaya, Jl. Raya Palembang - Prabumulih Km. 32 Indralaya, Ogan Ilir District, South Sumatra 30662, e-mail: mohamadamin@fp.unsri.ac.id

Erna Yuliwati, School of Chemical Engineering, Faculty of Engineering, University of Muhammadiyah Palembang, Jl. Jenderal Ahmad Yani 13 Ulu Seberang Ulu II, 13 Ulu, Plaju Sub-District, Palembang City, South Sumatra 30263, e-mail: erna.yuliwati@unsri.ac.id

Commented [u7]: please add, as in the example below:

- the authors full names
- the affiliation
- the affiliation address
- the email address of each author

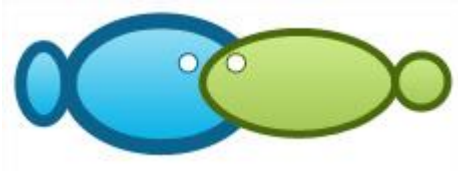

Bioflux (publishing house)
54 Ceahlau Street,
Cluj-Napoca 400488,
Romania, European Union

Certificate

This certificate shows that the manuscript entitled „**Study of water quality in Lake Ranau on Tilapia (*Oreochromis niloticus*) culture area using difference embedded net cage (KJT) density at Warkuk Ranau Selatan District**”, authored by Tiara Santeri, Mohamad Amin, Erna Yuliwati, submitted to our journal AACL Bioflux - International Journal of the Bioflux Society, has been finally accepted for publication and will be published in Volume 14, Issue 1, 2021.

Thank you for your participation!

Cordially yours,

Editor,
Tudor Păpuc

Senior Researcher
Ioan Valentin Petrescu-Mag, PhD
editor-in-chief

