

ISSN Print: 0976-6308

ISSN Online: 0976-6316

<http://www.iaeme.com/ijciyet/index.asp>

International Journal of Civil Engineering & Technology (IJCIET)



IAEME Publication

Plot : 03, Flat- S 1,

Poomalai Santosh Pearls Apartment

Plot No. 10, Vaiko Salai 6th Street

Jai Shankar Nagar, Palavakkam, Chennai- 600 041

Tamilnadu, India



Enter Search Keyword

[Online Paper Submission](#)

16972 Articles From 87 Journals

[CALL FOR PAPER September - September 2019 ISSUE](#)

New

[Submit an Article](#)

Pilih Bahasa ▼

[About IAEME](#)
[Authors Information](#)
[International Journals](#)
[Processing Charges](#)
[Quality of Journals](#)
[Download](#)
[Journal Subscription](#)
International Journal of Civil Engineering and Technology (IJCET)

ISSN Print : 0976 - 6308

ISSN Online: 0976 - 6316

Volume 9, Issue 9 (2018)

Copyright ©IAEME, 2019

Bibliometrics

DownLoad (3 Weeks)	: 1155
DownLoad (6 Weeks)	: 1540
DownLoad (6 Months)	: 1917
DownLoad (1 Year)	: 2218



S.No	Article ID	Title of the Paper	Authors	Pages	Downloads	How to cite this article
1	IJCET_09_09_001	THE CORRELATION OF NEUROPHYSIOLOGIC AND SOCIAL MECHANISMS OF THE SUBCONSCIOUS MANIPULATION IN MEDIA TECHNOLOGY New! Download	LARISA V. MUREYKO, OLGA D. SHIPUNOVA, MAKSIM A. PASHOLIKOV, INNA B. ROMANENKO and YURIY M. ROMANENKO	1 - 9	107	View
		PDF Abstract Reference				
2	IJCET_09_09_002	STUDY OF FROST MOUND TEMPERATURE CONDITION New! Download	E. V. MARKOV, S. A. PULNIKOV, YU. S. SYSOEV	10 - 15	59	View
		PDF Abstract Reference				
3	IJCET_09_09_003	TYPOLOGY AND STUDY OF LANDSLIDES AFFECTING THE TANGIER – OUED R'MEL MOTORWAY SEGMENT New! Download	SAHAR HOUSSAINI and LAHCEN BAH	16 - 22	36	View
		PDF Abstract Reference				
4	IJCET_09_09_004	STABILIZATION OF SLOPES: CASE OF THE TANGIER-TANGIER MED PORT HIGHWAY New! Download	SAHAR HOUSSAINI, LAHCEN BAH, OTHMANE HNIAD, ET AMGAAD SAADIA	23 - 31	25	View
		PDF Abstract Reference				
5	IJCET_09_09_005	PARTIAL REPLACEMENT OF NATURAL FINE AGGREGATE WITH FLY ASH AND ITS COMPRESSIVE STRENGTH New! Download	JUNAID-UL-ISLAM and ZULUFQAR-BIN-RASHID	32 - 36	47	View
		PDF Abstract Reference				
6	IJCET_09_09_006	WORKING CLIMATE, PHYSICAL WORKLOAD AND ITS RELATION TO HEAT STRAIN ON CONSTRUCTION WORKERS AT AIRPORT DEVELOPMENT PROJECT New! Download	YULIANI SETYANINGSIH, KEMALA IMAS and SUROTO	37 - 42	24	View
		PDF Abstract Reference				
7	IJCET_09_09_007	CASE STUDY – MULTIPLE VALUATION APPROCHES OF PROJECTS FOR DIFFERENT CONSTRUCTION DESIGNS & TECHNIQUES New! Download	PRASAD, I.L.N, BALAJI, K.V.G.D	43 - 50	22	View
		PDF Abstract Reference				
8	IJCET_09_09_008	HIGH VOLUME FLY ASH CONCRETE MODIFIED BY NANO SILICA PARTICLES AND EXPOSED TO SEWERAGE ENVIRONMENT New! Download	RUSL AL RAMMAHI, FADHIL RASIN, FARIS AL ANI	51 - 62	35	View
		PDF Abstract Reference				
9	IJCET_09_09_009	FEASIBILITY STUDY AND ECONOMIC ASSESSMENT FOR AL-QADISIYAH UNIVERSITY HOSPITAL OF SPECIALIZED SURGERIES New! Download	S.A. HASAN, A.D. ALBDIRI and A.H. MOHSEN	63 - 72	13	View
		PDF Abstract Reference				
10	IJCET_09_09_010	NON-REGULAR INTERFERENCE OF CATCHING-UP SHOCK WAVES. CLASSIFICATION OF SHOCK WAVE CONFIGURATIONS AND THEIR DOMAINS New! Download	VLADIMIR V. UPYREV, PAVEL V. BULAT, NIKOLAY V. PRODAN	73 - 83	17	View
		PDF Abstract Reference				
11	IJCET_09_09_011	EVALUATION OF THE INTERNAL STRUCTURE OF DOLERITE SPECIMENS USING X-RAY AND LASER ULTRASONIC TOMOGRAPHY New! Download	I.A. SHIBAEV, E.B. CHEREPETSKEYA, A.S. BYCHKOV, V.P. ZARUBIN, P.N. IVANOV	84 - 92	23	View

PDF Abstract Reference

[ANALYSIS OF STEPPED BEAMS ON ELASTIC SUBGRADE](#)[New!](#) [Download](#)

12 IJCET_09_09_012

ADEL A. AL-AZZAWI

84 - 92

27

[View](#)

PDF Abstract Reference

[STRENGTH AND DURABILITY OF HIGH PERFORMANCE CONCRETE CONTAINING FLY ASH AND MICRO SILICA](#)[Download](#)

13 IJCET_09_09_013

MOSLIH AMER SALIH

104 - 114

30

[View](#)

PDF Abstract Reference

[AN EFFECT OF DATA MINING TECHNIQUES IN PUBLIC HEALTHCARE- A CASE STUDY](#)[New!](#) [Download](#)

14 IJCET_09_09_014

M.A. SHANTI, K. SARAVANAN

115 - 122

21

[View](#)

PDF Abstract Reference

[NUMERICAL MODEL FOR CPTED EVALUATION OF KOREAN SCHOOL FACILITIES BUILT BEFORE CPTED](#)[New!](#) [Download](#)

15 IJCET_09_09_015

JONGSIK LEE

123 - 134

17

[View](#)

PDF Abstract Reference

[WORK ORDER BUILDING INFORMATICS PLATFORM FOR PLANNING RESIDENTIAL BUILDING PROJECTS AND MAINTENANCE WORK](#)[New!](#) [Download](#)

16 IJCET_09_09_016

AMUSAN, LEKAN, KEHINDE AYO-YUSSUF, AYODEJI OGUNDE, TUNJI-OLAYENI P., ADEDEJI AFOLABI, JAMES OWOLABI

135 - 146

12

[View](#)

PDF Abstract Reference

[MAINTAINING THE FIRST COMFORT CONDITION IN RESIDENTIAL BUILDINGS UNDER THE COMPLIANCE OF ENERGY EFFICIENCY REQUIREMENTS](#)[New!](#) [Download](#)

17 IJCET_09_09_017

S D VYATKINA, T S ZHILINA, I E MOLOSTOVA, V V MIRONOV, O A STEPANOV

147 - 155

12

[View](#)

PDF Abstract Reference

[ORTHOPHOTO PRODUCTION FROM AERIAL PHOTOGRAPH BY USING MATLAB AND GIS](#)[New!](#) [Download](#)

18 IJCET_09_09_018

YOUSIF H. KHALAF and NAGHAM A. ABDULATEEF

156 - 164

8

[View](#)

PDF Abstract Reference

[AN APPLICATION OF HEALING VERSES \(AS-SYIFA VERSES\) AS THERAPY APPROACH TO REDUCE STRESS IN DRUG ADDICTION](#)[New!](#) [Download](#)

19 IJCET_09_09_019

ZULFA IZZA MOHAMED @ HASHIM, SAMHANI ISMAIL, R HUSAIN, SHS OMAR and N MOHAMAD

165 - 173

9

[View](#)

PDF Abstract Reference

[MANAGEMENT ACCOUNTING AND REWARD SYSTEMS IN LOCAL GOVERNMENT COMPANY](#)[New!](#) [Download](#)

20 IJCET_09_09_020

NANANG SHONHADJI

174 - 184

11

[View](#)

PDF Abstract Reference

[MECHANICAL BEHAVIOR OF RUBBERIZED INTERLOCKING BRICKS FOR MASONRY STRUCTURAL APPLICATIONS](#)[New!](#) [Download](#)

21 IJCET_09_09_021

AMIN AL-FAKIH, BASHAR S. MOHAMMED, MOHD SHAHIR LIEW, WESAM S ALALOUL, MUSA ADAMU, VEERENDRAKUMAR C KHED, M. A. DAHIM and H. AL-MATTARNEH

185 - 193

28

[View](#)

PDF Abstract Reference

[BEHAVIOR OF SAND SOIL DUE TO INTERACTION BETWEEN SOIL AND STRUCTURAL MATERIALS](#)[New!](#) [Download](#)

22 IJCET_09_09_022

AHMED RAAD, BASIM JABBAR ABBAS, HUSSEIN M. ASHOUR AL.KHUZAIE

194 - 214

21

[View](#)

PDF Abstract Reference

[SAFETY IN CONSTRUCTION: REDUCING THE PHYSICAL DEMANDS ON WORKERS IN NIGERIA](#)[New!](#) [Download](#)

23 IJCET_09_09_023

O.O. IZOBO-MARTINS, E.O AYO-VAUGHAN, O.O BADEJO, E.N. EKHAESE, C ELENWO and I NWAKUDU

215 - 221

7

[View](#)

PDF Abstract Reference

[SULPHURIC ACID ATTACK ON M40 GRADE SELF COMPACTING CONCRETE](#)[New!](#) [Download](#)

24 IJCET_09_09_024

S BALIRAM and B SURAJ

222 - 229

17

[View](#)

PDF Abstract Reference

[EFFECT OF BACTERIA SUBTILIS ON CONCRETE SUBSTITUTED FULLY AND PARTIALLY WITH DEMOLITION WASTES](#)[New!](#) [Download](#)

25 IJCET_09_09_025

I. ROHINI and R. PADMAPRIYA

230 - 243

18

[View](#)

PDF Abstract Reference

[EVALUATION OF FACTORS CAUSING ORDO 3 RIVER FLOOD IN URBAN](#)[New!](#) [Download](#)

26 IJCET_09_09_026

PRANOTO SAMTO ATMOJO, SUTARTO EDHISONO, M and SIGIT, ROMI. N

244 - 255

15

[View](#)

PDF Abstract Reference

[ICT AND SKILL DEVELOPMENT OF THE WORKFORCE -A REVIEW OF LITERATURE \(WITH SPECIAL REFERENCE TO PRADHAN MANTRI KAUSHAL VIKASH YOJANA- PMKVY\)](#)[New!](#) [Download](#)

27 IJCET_09_09_027

SNIGDHA SUHAGIN, B.C.M. PATNAIK and IPSEETA SATPATHY

256 - 262

5

[View](#)

PDF Abstract Reference

[SMART CITY BASED ON CLOUD COMPUTING AND IOT](#)[New!](#) [Download](#)

28 IJCET_09_09_028

MYTHILI N and SWARAJ PATI

263 - 270

29

[View](#)

PDF Abstract Reference

[DESTRUCTIVE AND NON-DESTRUCTIVE EVALUATION OF GEOPOLYMER CONCRETE](#)[New!](#) [Download](#)

29 IJCET_09_09_029

PITTA ARCHANA and VENU MALAGAVELLI

271 - 279

20

[View](#)

PDF Abstract Reference

30	IJCET_09_09_030	MATHEMATICAL MODEL OF BIOGAS TREATMENT PROCESS WITH A ZEOLITE FILTER New! Download	VARVARA P. DRUZYANOVA, YURI ZH. DONDOKOV, OROSMAMAT M. OSMONOV, ANASTASIA A. BRICHAGINA and OLGA P. SEMENOVA	280 - 288	11	View
		PDF Abstract Reference				
31	IJCET_09_09_031	A REVIEW ON DIFFERENT TYPES OF WASTES USED AS FILLERS IN BITUMINOUS MIX New! Download	V. ASHOK VARMA and M.T.S. LAKSHMAYYA	289 - 300	24	View
		PDF Abstract Reference				
32	IJCET_09_09_032	TREATMENT OF WATER BY TRADITIONAL METHODS New! Download	P. VIJAYALAKSHMI, B PRITHIV KRISHNA and S PREM KUMAR	301 - 314	39	View
		PDF Abstract Reference				
33	IJCET_09_09_033	PROVIDING PRIVACY AND DIMENSIONAL SEARCH ON LONGITUDINAL DATA USING SAFE COMPUTING: A CASE STUDY New! Download	DEEPA .M, K. SANTHI, M. LAWNIA SHRI, M. B. BENJULA ANBU MALAR, G. PRIYA and FESLIN ANISH MON	315 - 322	3	View
		PDF Abstract Reference				
34	IJCET_09_09_034	IMPROVEMENT OF ORDINARY AND PURE GYPSUM PROPERTIES BY USING POLYVINYL ALCOHOL (PVA) New! Download	ABO DHAHEER, MOHAMMED. S,HAIDER K. AMMASH and KASSIM KADHIM HAMEED	323 - 334	16	View
		PDF Abstract Reference				
35	IJCET_09_09_035	MEASUREMENT OF URBAN SPRAWL AND COMPACTNESS CHARACTERISTICS NASIRIYAH CITY - IRAQ AS CASE STUDY New! Download	AHMED SHAMKHI JEBER AL-KHAFAJI and NADIA ABDUL-MAJEED AL-SALAM	335 - 343	9	View
		PDF Abstract Reference				
36	IJCET_09_09_036	MODERATING PARTIAL LEAST SQUARE TO THE MANAGEMENT INFORMATION SYSTEM WITH TOTAL QUALITY MANAGEMENT OF STUDY PROGRAM PERFORMANCE New! Download	JEMMY RUMENGAN, CHABULLAH WIBISONO, BAMBANG WIDJANARKO OTOK	335 - 343	11	View
		PDF Abstract Reference				
37	IJCET_09_09_037	CONSTRUCTION TECHNOLOGY OF FRENCH COLONIAL WINDOWS AND THE REASON BEHIND THE GEOMETRY New! Download	K. MATHAN KANNAN, R.V. NAGARAJAN and M. DHANALAKSHMI	344 - 352	9	View
		PDF Abstract Reference				
38	IJCET_09_09_038	BONDING BEHAVIOUR OF EPOXY RESIN OVER MINERAL COMPOSITE IN FRP RETROFIT New! Download	RAGHAVENDRA VASUDEVA UPADHYAYA and T. G. SUNTHARAVADIVEL	362 - 371	14	View
		PDF Abstract Reference				
39	IJCET_09_09_039	EFFECTS OF GLASS AND POLY PROPYLENE FIBRE ON STRENGTH AND DURABILITY OF PERVIOUS CONCRETE WITH GRADATION OF AGGREGATES New! Download	SHILPA PATIL, PRADEEP M and ANIL KUMAR M S	372 - 384	14	View
		PDF Abstract Reference				
40	IJCET_09_09_040	SANITATION IMPLEMENTATION FOR PALANGKA RAYA CITY BASED ON CARBON FOOTPRINT BALANCE New! Download	FERNANDO, HERRY PALANGKA JAYA, YETRIE LUDANG	385 - 389	4	View
		PDF Abstract Reference				
41	IJCET_09_09_041	THE INFLUENCE OF MARKETING AND DESIGN INTEGRATION, BARRIERS TO INTEGRATION ON MARKETING PERFORMANCE New! Download	SUGIH ARTO PUJANGKORO, SUKARIA SINULINGGA, HARMEIN NASUTION, HUMALA NAPITUPULU	390 - 400	5	View
		PDF Abstract Reference				
42	IJCET_09_09_042	EFFECTS OF NITRIC ACID ON DURABILITY CHARACTERISTICS OF M60 SELF COMPACTING CONCRETE New! Download	R VENU, BARAIK SURAJ and G. VENKATA RAMANA	401 - 407	11	View
		PDF Abstract Reference				
43	IJCET_09_09_043	ENHANCING END-TO-END DEVICE SECURITY OF INTERNET OF THINGS USING DYNAMIC CRYPTOGRAPHIC ALGORITHM New! Download	CHALLA MADHAVI LATHA and K.L.S. SOUJANYA	408 - 415	5	View
		PDF Abstract Reference				
44	IJCET_09_09_044	FORMULATION OF METHOD OF REINFORCED CONCRETE COLUMN DESIGN USING QUADRATIC POLYNOMIALS New! Download	TJIANG ARIF GUNADI, HERMAN PARUNG, ABD. RACHMAN DJAMALUDDIN and A. ARWIN AMIRUDDIN	416 - 425	22	View
		PDF Abstract Reference				
45	IJCET_09_09_045	ASSESSING THE IMPACT OF QUALITY SUPERVISION ON CONSTRUCTION OPERATIVES' PROJECT DELIVERY IN NIGERIA New! Download	KUNLE E. OGUNDIPE, HEZEKIAH F. OLANIRAN, ADEKUNLE M. AJAO, BABATUNDE F. OGUNBAYO	426 - 439	8	View
		PDF Abstract Reference				
46	IJCET_09_09_046	REVIEW OF WORLD EARTHQUAKES New! Download	J.O. OLUWAFEMI, O.M. OFUYATAN, O.M. SADIQ, S.O. OYEBISI, J.S. ABOLARIN, K.O. BABAREMU	440 - 464	17	View
		PDF Abstract Reference				

47	IJCET_09_09_047	EFFECT OF AWARENESS AGAINST TAXPAYERS TAX COMPLIANCE, SMALL AND MEDIUM ENTERPRISES IN MEDAN New! Download	HERMAN PANJAITAN, TARMIZI, MURNI DAULAY, RAHMANTA GINTING	465 - 475	11	View
		PDF Abstract Reference				
48	IJCET_09_09_048	AN EVALUATION OF THE BASIC FACILITY NEEDS OF PRIVATE UNIVERSITY STUDENTS IN OGUN STATE, NIGERIA New! Download	OLUWUNMI, A. O., AKINJARE, O. A., AJIBOLA, M. O., OLOKE, O. C.	476 - 484	19	View
		PDF Abstract Reference				
49	IJCET_09_09_049	THE DETERMINATION OF RAINFALL CATCHMENT COEFFICIENT OF HIGH RISE BUILDING New! Download	ISMAIL SA'UD, S. KAMILIA AZIZ, SUNGKONO	485 - 493	16	View
		PDF Abstract Reference				
50	IJCET_09_09_050	SOFT MODEL CONSUMER ONLINE DECISION JOURNEY: MARKETING MIX, SOCIAL CULTURALO. INFORMATION TECHNOLOGY AND HUMANISM AS A MODERATING EFFECT New! Download	IRWAN CHRISTANTO EDY, RIYANTO, HERIYANTA BUDI UTAMA	494 - 507	16	View
		PDF Abstract Reference				

Pages 1 | 2 | 3 | 4 | 5 |

IJM | IJARET | IJCET | IJMET | IJECET | IJEET | IJCET | IJITMIS | IJGM | IJARM | IJMHRM | IJIPR | JCET | IJLIS | JECET | JEET | JCIET | JOM | JMET
 Google Scholar | Thomson Reuters' Research ID | Call For Paper | Online Paper Submission | List of Journals | Subscription | Processing Fee
 Home | About IAEME | Contact Us | Payment Policy



THE EFFECT OF W/C AND RICE HUSK ASH (RHA) ON MECHANICAL PROPERTIES OF SELF-COMPACTING CONCRETE (SCC)

Saloma

Civil Engineering Department, Faculty of Engineering,
Sriwijaya University, Indonesia

Hanafiah

Civil Engineering Department, Faculty of Engineering,
Sriwijaya University, Indonesia

Niko Setiawan

Civil Engineering Department, Faculty of Engineering,
Sriwijaya University, Indonesia

ABSTRACT

One of the innovations in the world concrete industry development is Self Compacting Concrete (SCC), which is known as concrete that can compact by itself. The material used in SCC differs from conventional concrete, for example, the reduction of amount and passing size 10 mm for coarse aggregate, the addition of fine aggregate amount, and the addition of quartz sand with grain size 50 - 650 μ m to reduce hydration heat and increase the flow ability and workability on fresh concrete mixtures. In addition, chemical admixture with high-range water reducer (HRWR) type is used to reduce the water use and mineral admixture is also used in the form of rice husk ash as a substitution material for cement use. SCC is expected to reduce the cement use in concrete mixtures which is not environment friendly. This study used variations of w/c = 0.275, w/c = 0.300, and w/c = 0.325 and the rice husk ash by 0%, 5%, 10%, and 15% of the cement use. Flow ability test, and workability test were performed using test equipments such as slump cone test, V-funnel, and L-box to know the SCC criteria. After that, the concrete compressive strength test was performed at age 3, 7, 14, and 28 days with cylindrical samples with size 100x200 mm. The higher use of rice husk ash causes the value of flow ability and workability tends to decrease and the decrease of concrete density. The result of compressive strength test at age 28 days of SCC-10-0.275 mixture showed a significant increase of compressive strength of 70.528 MPa and the minimum compressive strength was 46.679 MPa for mixture SCC-15-0.325.

Key words: Self compacting concrete, V-funnel, L-box, rice husk ash, flow ability

Cite this Article: Saloma, Hanafiah and Niko Setiawan, The Effect of W/C and Rice Husk Ash (RHA) on Mechanical Properties of Self-Compacting Concrete (SCC). *International Journal of Civil Engineering and Technology*, 9(9), 2018, pp. 957-967.
<http://www.iaeme.com/IJCIET/issues.asp?JType=IJCIET&VType=9&IType=9>

1. INTRODUCTION

Concrete is one of the most commonly used construction materials in various construction works, it is undeniable that all aspects in constructions world are related to concrete. In the manufacture of concrete, it is generally used some materials that mixed together, so that it can be concrete. The mixture of conventional concrete is from cement, water, fine aggregate, and coarse aggregate. In the 1980s in Japan, SCC was produced at the University of Tokyo in collaboration with leading contractors for concrete manufacturing. Concrete is designed to flow through very small reinforcement gaps without any bleeding and segregation. Superplasticizer becomes an additional material for the concrete to get a high slump [1, 2, 3]. SCC is described as a self-placing concrete, and self-leveling concrete, which is part of SCC [4, 5].

SCC is a high performance concrete that can compact by self-weight and fill all the voids without segregation, excessive bleeding or any other separation of materials, without the need of vibrator. SCC characteristics are filling ability, passing ability, and segregation resistance [6, 7, 8].


In this study, SCC concrete was made using water, cement, fine aggregate, coarse aggregate, superplasticizer and addition of rice husk ash. Rice husk ash is a type of mineral additive that has silica elements that resembles cement. Rice husk is the outer cover of the rice plant grain with a high concentration of silica about more than 80-85% [9, 10]. Rice husk ash (RHA) is obtained from the residue of the rice husk combustion from rice mill, Buyung Putra Pangan Inc., which is located in South Sumatera province. The expectation of cement use being substituted by rice husk ash is that it can be more environments friendly and able to make concrete that can do the compaction by itself, which can increase the ease of work, especially in concrete industry.

SCC can compact by its self-weight and fill every corner of the formwork in confined reinforcements. SCC consists of ingredients like cement, aggregates, water, and admixtures. However, for good workability, optimum dosage of superplasticizer admixture is used to reduce the water content. Superplasticizer helps decreases the w/c ratio to increase the segregation resistance [11].

The key properties of SCC are filling ability, passing ability, and segregation resistance. Filling ability is the property to flow through the formwork and fill all the spaces. Passing ability is the property to flow without any blocking. The segregation resistance is the property of SCC to maintain a uniform composition hence the paste and the aggregate bind together [12]

2. MATERIAL AND METHOD

This study was conducted with variations of rice husk ash use by 5%, 10%, and 15% as the substitution of cement use and variations of w/c 0.275, 0.300, and 0.325. Fine aggregate and coarse aggregate test used the ASTM standards and SCC workability test used the EFNARC standards. The materials used are as follows cement, water, fine aggregate, coarse aggregate, superplasticizer, and rice husk ash.

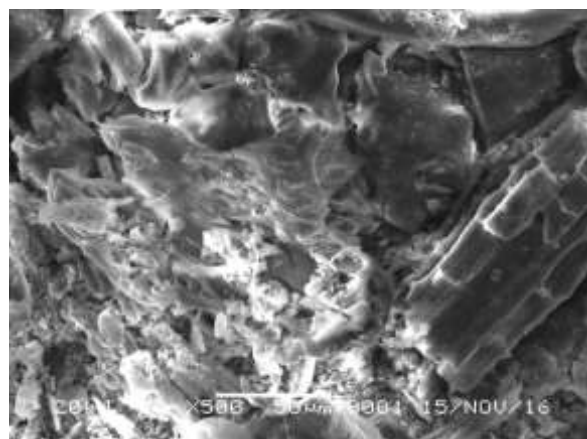**Figure 1** SEM of RHA**Table 1** Chemical composition of RHA

No.	Contents	Weight (%)
1	Silicon Dioxide (SiO ₂)	94.68
2	Aluminum Oxide (Al ₂ O ₃)	0.24
3	Iron (III) Oxide (Fe ₂ O ₃)	0.80
4	Calcium Oxide (CaO)	1.77
5	Magnesium Oxide (MgO)	0.00
6	Sulfur Trioxide (SO ₃)	0.43
7	LOI	2.80

Table 2 Mix proportion of 1 m³ SCC

Mix	OPC (kg)	RHA (kg)	FA (kg)		CA (kg)	Water (kg)
			1	2		
SCC-0-0.275	600	0	246	540	823	165
SCC-0-0.300	600	0	246	540	823	180
SCC-0-0.325	600	0	246	540	823	195
SCC-5-0.275	570	30	246	540	823	165
SCC-5-0.300	570	30	246	540	823	180
SCC-5-0.325	570	30	246	540	823	195
SCC-10-0.275	540	60	246	540	823	165
SCC-10-0.300	540	60	246	540	823	180
SCC-10-0.325	540	60	246	540	823	195
SCC-15-0.275	510	90	246	540	823	165
SCC-15-0.300	510	90	246	540	823	180
SCC-15-0.325	510	90	246	540	823	195

The cement used in this study was OPC (Ordinary Portland Cement) type I with cement fineness value of 340m²/kg. Water used in this study was water of PDAM. Distilled water is water through the distillation process. The process of distillation was done by cooking water with a temperature of more than 100°C. The fine aggregate used was natural sand from Tanjung Raja. In accordance with ASTM standards, the used fine aggregate grain size ranged from 0.125 - 4 mm and quartz sand grain size ranged from 50 - 650 µm. The coarse aggregate used was the Merak split stone. The used coarse aggregate size was split stone with a maximum size of 10 mm. The superplasticizer used in this research is type F superplasticizer. The basic material of superplasticizer used is polycarboxylate ether (PCE). The use of

superplasticizer was to raise the compressive strength and reduce the water cement ratio (w/c). RHA is a waste of rice husk combustion from PT. Buyung Putra Pangan. RHA was first filtered with a sieve size of 200 that resembles a cement grain size. The test result is shown on Table 1. SEM of RHA was tested at Pusat Survei Geologi Laboratory with 500x magnification. The result can be seen on Figure 1. The composition of SCC mixture that used can be seen in Table 2.

3. RESULT AND DISCUSION

3.1. Slump Flow

The value obtained in the slump flow test was obtained from four perpendicular directions, and then the data were averaged. Figure 2 shows that with the increase use of RHA, the slump flow diameter becomes smaller. This is because the volume and rate of water absorption in RHA in the mixture are high.

Figure 3 shows the results of the slump flow test based on the variations of w/c ratio. The higher value of w/c ratio, the diameter obtained from the slump flow test is larger, this is due to the increase of mortar volume because it contains high water content at high w/c ratio. Slump flow values ranged from 59 – 77 cm. The maximum slump flow value was found in the SCC-0-0.325 mixture, while the minimum slump flow value was in the SCC-15-0.275 mixture.

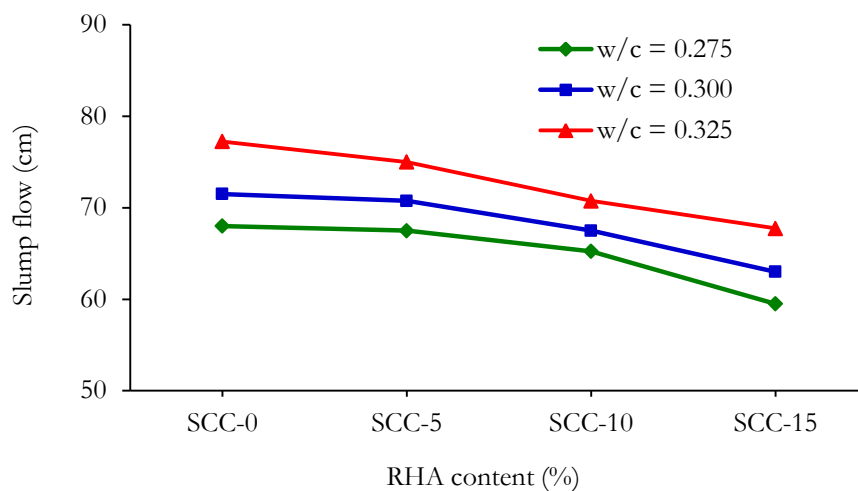


Figure 2 The effect of RHA content on slump flow

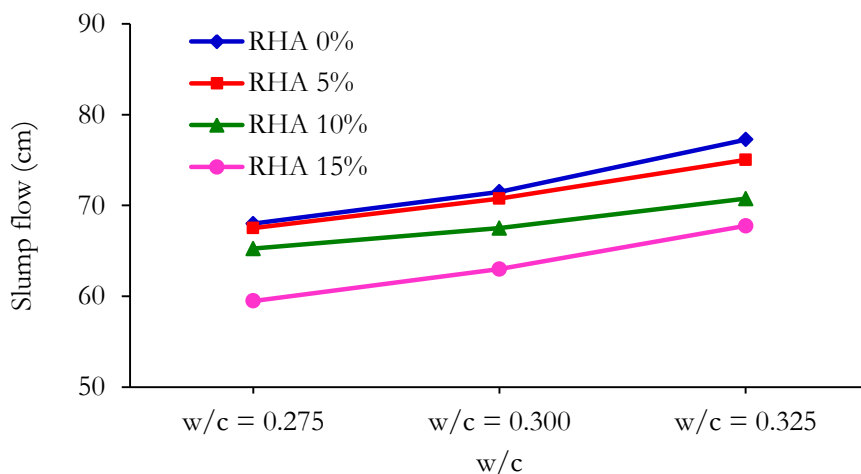


Figure 3 The effect of w/c ratio on slump flow

3.2. V-Funnel

V-funnel value was obtained from the result of time measurement required by fresh concrete mixture to flow from V-shaped tool. V-funnel test result can be seen in Figure 4 and Figure 5. Figure 4 is a result of a V-funnel test based on RHA that explains that the increase of RHA makes the V-funnel time becomes longer. The increase of RHA particles in the mixture causes the increase of fresh concrete viscosity. The maximum V-funnel value was in the SCC-15-0.275 mixture for 23.43 seconds, while the minimum V-funnel value was in the SCC-0-0.325 mixture for 4.88 seconds. Figure 5 explains that as the value of w/c ratio increases, the V-funnel time becomes faster. V-funnel values ranged from 4 - 23 seconds. The maximum V-funnel value was in the SCC-15-0.275 mixture for 23.43 seconds, while the minimum V-funnel value was in the SCC-0-0.325 mixture for 4.88 seconds.

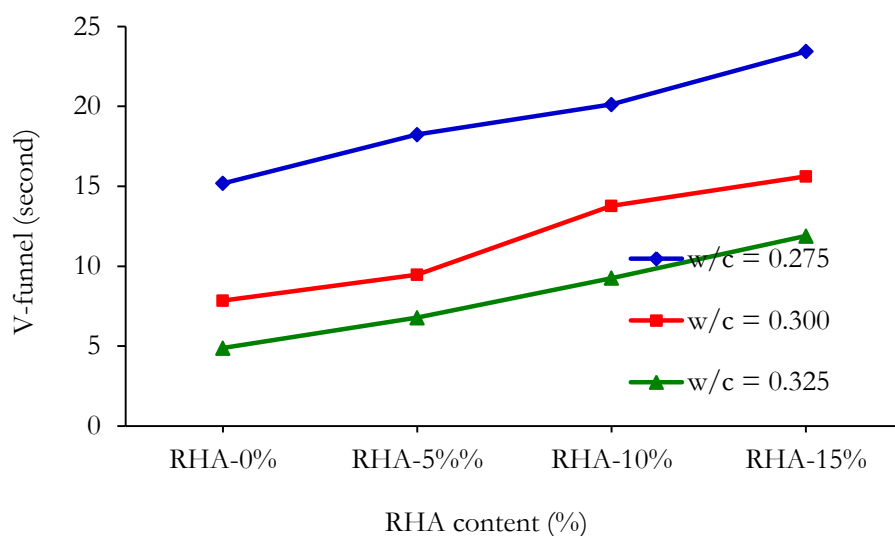


Figure 4 The effect of RHA content on V-funnel test

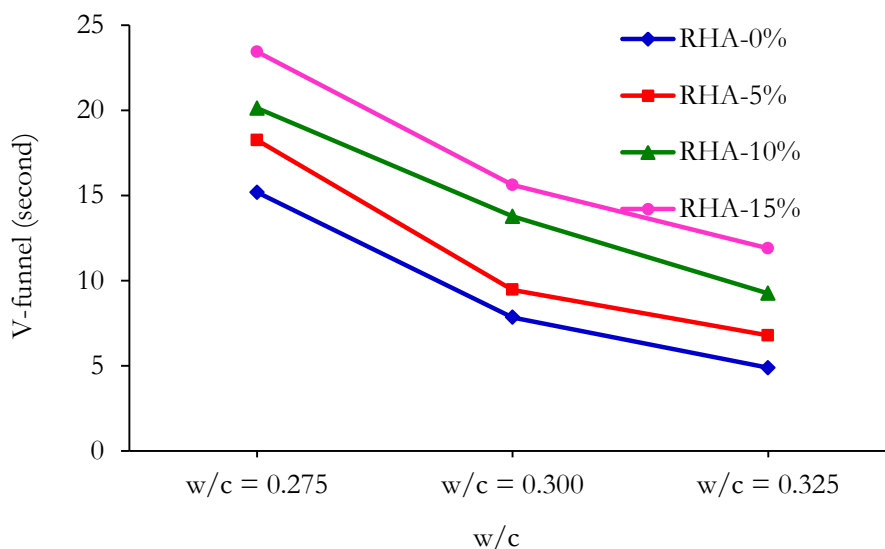


Figure 5 The effect of w/c on V-funnel test

3.3. L-Box

The L-box value is obtained from the comparison between the average of three-point measurement results from the base and the end of the L-box body. L-box test results can be seen in Figure 6 and Figure 7. Figure 6 explains that with increase of RHA, the L-box ratio

becomes smaller. This is due to the increase of viscosity and the decrease of ability of fresh concrete to flow. The minimum value of H_2/H_1 ratio was found in the SCC-15-0.275 mixture of 0.78 and the maximum value of the H_2/H_1 ratio was found in the SCC-0-0.325 mixture. This shows that the higher use of RHA causes the decrease of the H_2/H_1 ratio as the increase of RHA particles in the mixture causes the viscosity of fresh concrete to increase. Figure 7 explains along with the increase of w/c ratio, it makes the L-box ratio becomes higher. The higher the w/c ratio makes the higher the L-box ratio, which is affected by the large amount of water that makes the concrete mixture faster to flow. The L-box value ranged from 0.77 to 1.00. The maximum value of L-box ratio was found in the mixture of SCC-0-0.325 with value of 1.00, while the minimum L-box ratio was in the SCC-0-15-0.275 mixture with value of 0.77.

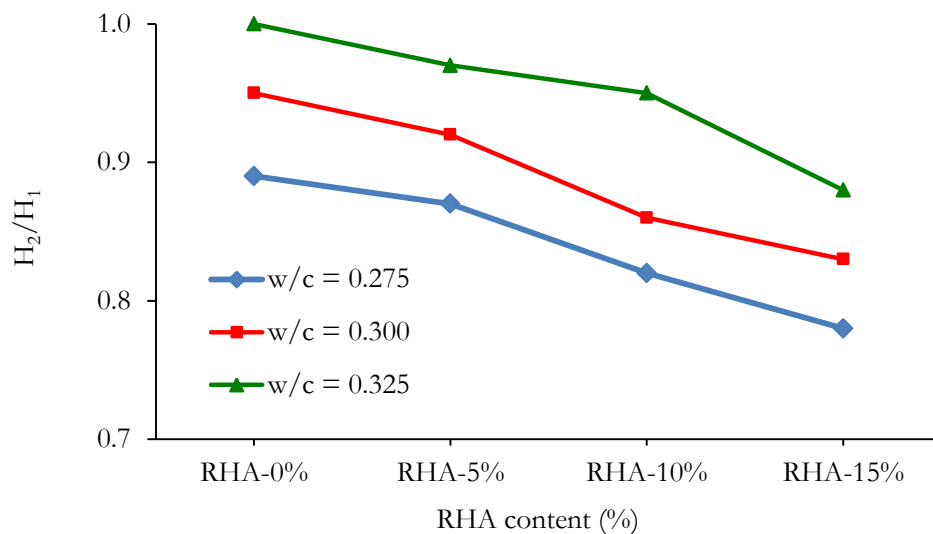


Figure 6 The effect of RHA on L-Box test

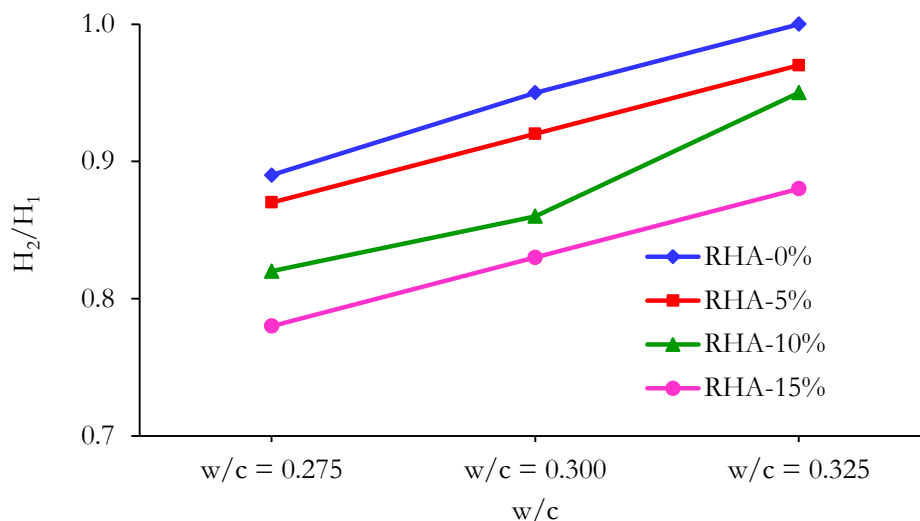


Figure 7 The effect of w/c on L-Box test

3.4. Compressive Strength

The results of hardened concrete test in this study were with concrete compressive strength tests at age 3, 7, 14, and 28 days. Figure 8 shows the compressive strength of SCC-0 concrete, without the addition of RHA at age 3, 7, 14, and 28 days. The minimum compressive strength

of normal concrete was in the SCC mixture with w/c 0.325 for each concrete age, while the maximum compressive strength was in the mixture of SCC-0-0.275 aged 28 days with a compressive strength of 63.383 MPa. The increase of w/c ratio in the concrete mixture makes the decrease of compressive strength. Figure 8 shows the effect of concrete age on compressive strength results of SCC-0. The minimum compressive strength of normal concrete was in the SCC mixture with w/c 0.325 for each concrete age, while the maximum compressive strength was in the mixture of SCC-0-0.275 of age 28 days with a compressive strength of 63.383 MPa.

Figure 9 shows the effect of concrete age on the compressive strength of SCC-5. In the SCC test with RHA content of 5% as a substitution of cement, the result of maximum compressive strength in mixture with variation w/c = 0.275 was obtained. At age 3 days, the compressive strength was 32.664 MPa, age 7 days was 40.132 MPa, age 14 days was 57.245 MPa, and the maximum compressive strength was obtained at age 28 days of 68.280 MPa.

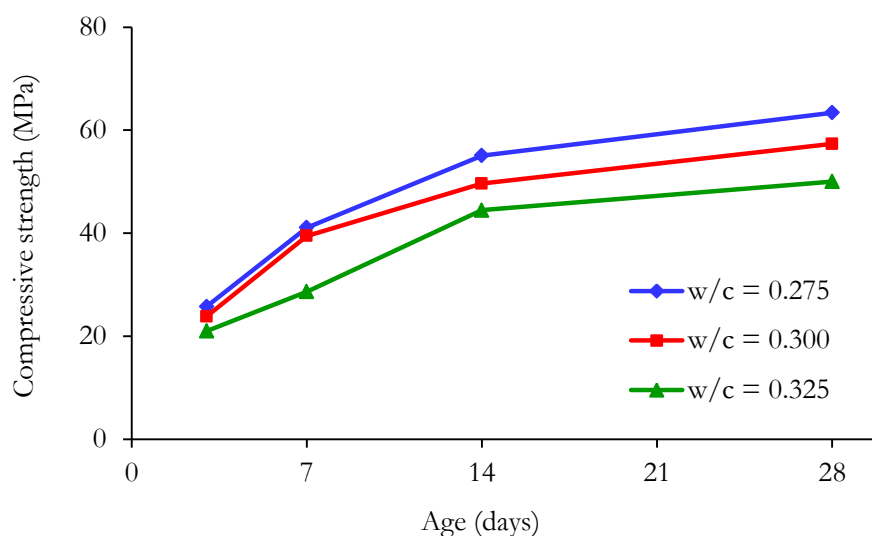


Figure 8. The compressive strength of RHA-0%

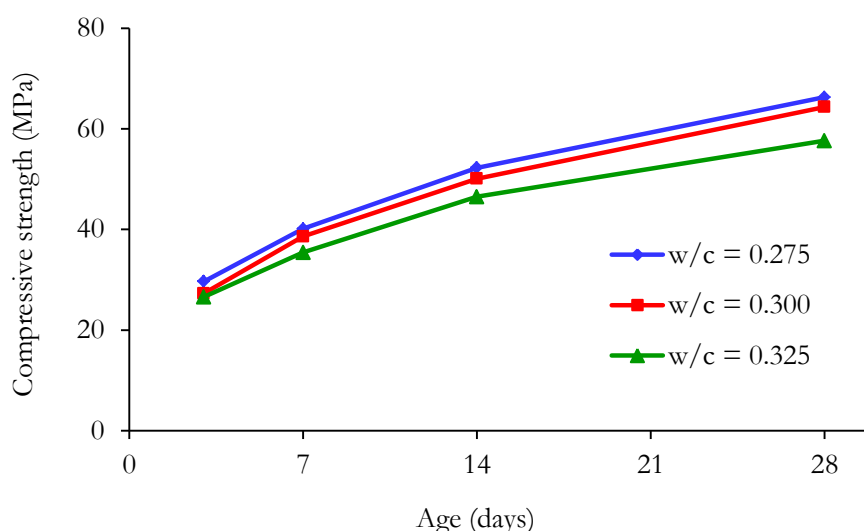


Figure 9 The compressive strength of RHA-5%

According to Figure 10, SCC test with RHA content of 10% as substitution of cement, the result of maximum compressive strength in mixture with variation w/c = 0.275 was obtained. At the age of 3 days, the compressive strength was 34.749 MPa, age 7 days was 48.284 MPa,

age 14 days was 57.982 MPa, and the maximum compressive strength was obtained at age of 28 days of 70.588 MPa. Figure 11 shows the effect of concrete age on SCC-15 compressive strength results at age 3, 7, 14, and 28 days. Based on the result of 3 days compressive strength test, the maximum compressive strength in SCC-15-0.275 was 26.940 MPa and the minimum value 22.244 MPa at SCC-0-0.325. At age of 28 days was obtained the maximum compressive strength of 70.528 MPa for SCC-10-0.275 mixture and the minimum compressive strength of 47.679 MPa for SCC-15-0.325 mixture.

Figure 12 shows the effect of w/c on the 28 days concrete compressive strength results. The higher w/c ratio makes the compressive strength of the concrete decreases. It can be seen on concrete compressive strength results in SCC-0-0.275 mixture of 63.383 MPa greater than SCC-0-0.325 of 50.018 MPa with difference -13.356 MPa. Figure 13 shows the results of concrete compressive strength test at age 28 days with RHA content as substitution material from cement use. The maximum value of compressive strength on SCC-10-0.275 mixture was 70.528 MPa and the minimum value of 47.479 MPa on SCC-15-0.325 mixture. There was a significant increase in compressive strength from the use of RHA 5% and RHA 10% from SCC 0% and decrease of compressive strength in SCC with RHA 15%.

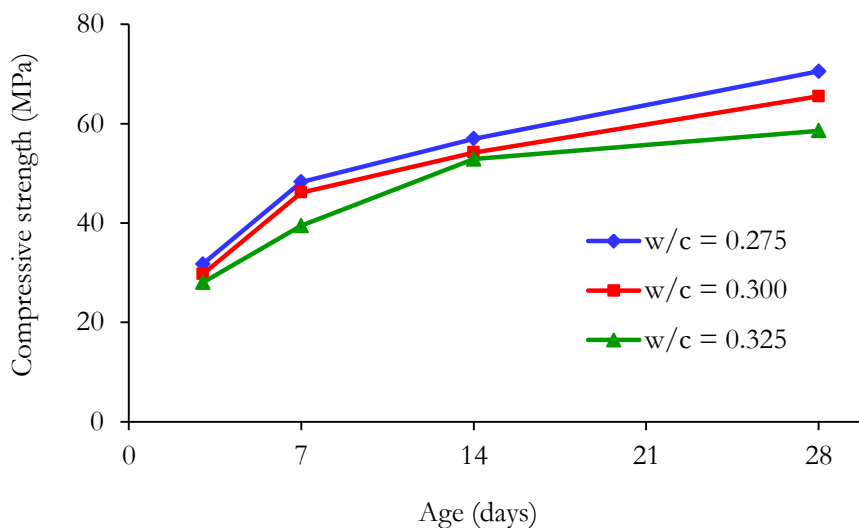


Figure 10 The compressive strength of RHA-10%

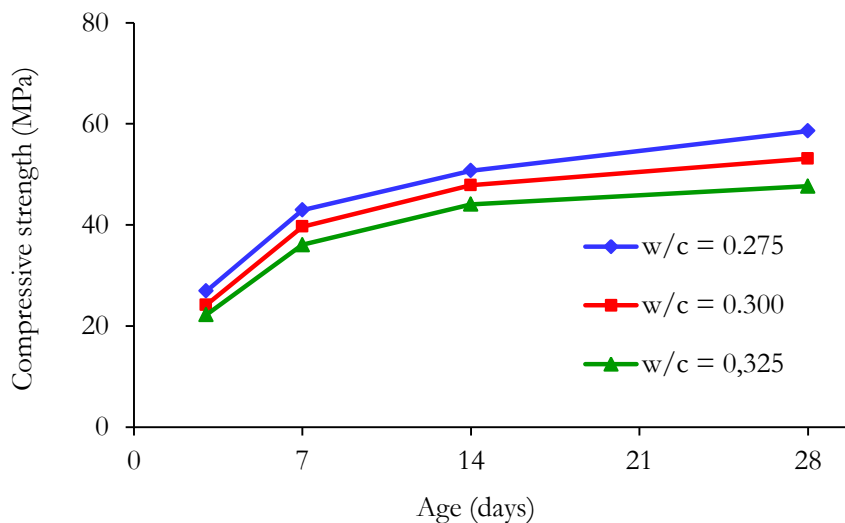


Figure 11 The compressive strength of RHA-15%

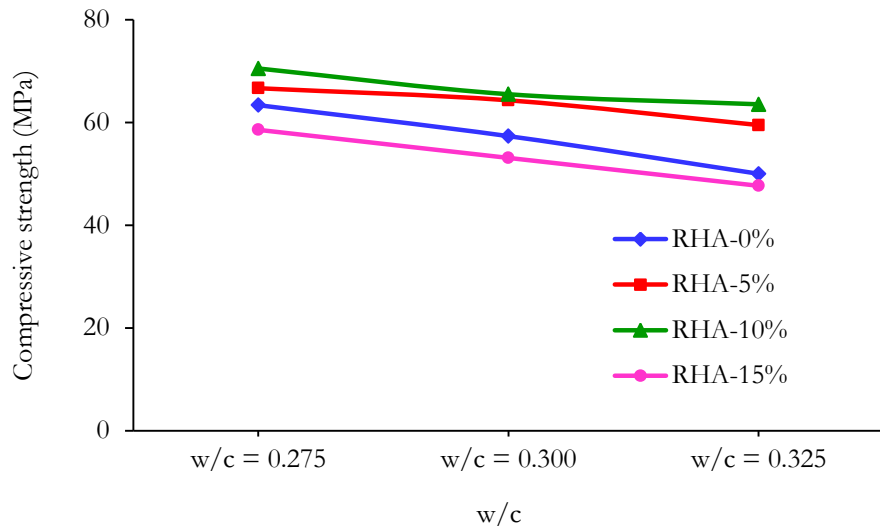


Figure 12 The effect of w/c on 28 days compressive strength

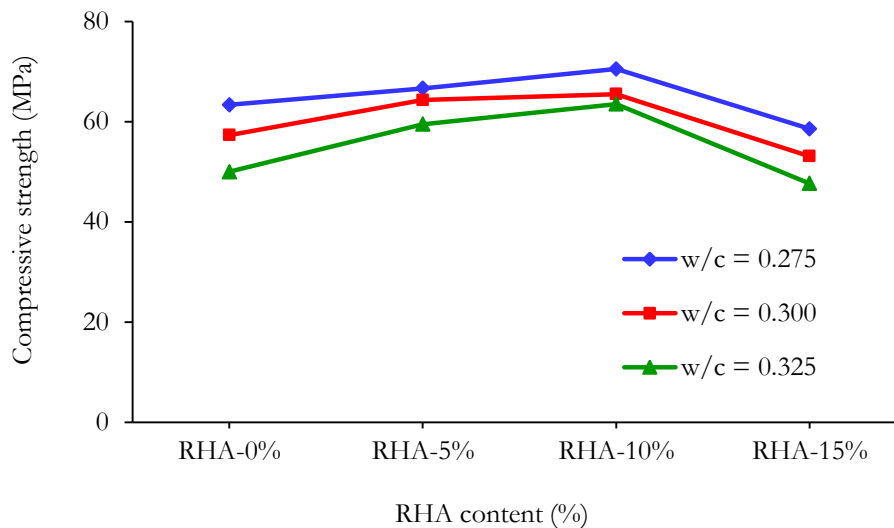


Figure 13 The compressive strength of 28 days concrete based on RHA content

4. CONCLUSIONS

The conclusions obtained from the study results are as follows:

- The maximum composition of the SCC mixture with the RHA substitution material shows the best performance in the mixture composition with a 10% substitution of RHA on the amount of cement used.
- The result of the slump flow test on fresh concrete shows a decrease in the diameter of fresh concrete along with the increase use of RHA. Slump flow test on fresh concrete showed the largest diameter at w/c = 0.325 with value of 77.25 cm and the smallest diameter at w/c = 0.275 with value of 59.50 cm.
- The result of the V-funnel test on fresh concrete shows the increase of flow time as RHA use increases. The V-funnel test on fresh concrete showed the fastest flow time at w/c = 0.325 with value of 4.88 seconds and the longest flow time at w/c = 0.275 with value of 23.43 seconds.

The Effect of W/C and Rice Husk Ash (RHA) on Mechanical Properties of Self-Compacting Concrete (SCC)

- The result of L-box test on fresh concrete shows a decrease of H₂/H₁ ratio along with increase of RHA use. The L-box test on fresh concrete showed the largest H₂/H₁ ratio at w/c = 0.325 with value of 1.00 and the smallest H₂/H₁ ratio at w/c = 0.275 with value of 0.78.
- The result of the specific gravity test shows that for each variation w/c was obtained the density for SCC of 2.70 - 3.20 gram/cm³.

The result of SCC compressive strength test at age 28 days with variation of SCC-10-0.275 and 10% RHA shows that there was a significant increase of concrete compressive strength. The result of the largest compressive strength value was 70.528 MPa for SCC-10-0.275 mixture and the minimum compressive strength was 47.679 MPa for SCC-15-0.325 mixture.

REFERENCES

- [1] A. H. Hassan and H. B. Mahmud, "Mixture proportioning of Self Compacting Concrete (SCC) containing fly ash, rice husk ash and blast furnace slag," *Electronic Journal of Structural Engineering*, vol. 13, pp. 16-20, 2013.
- [2] B. Bharali, "Experimental study on Self Compacting Concrete (SSC) using GGBS and fly ash," *International Journal of Core Engineering & Management*, vol. 2, pp. 1-11, 2015.
- [3] G. C. Behrera and R. K. Behera, "A study on properties of Self Compacting Concrete with slag as coarse aggregate," *International Research Journal of Engineering and Technology*, vol. 3, pp. 591-602, 2016.
- [4] T. Hemalatha, A. Ramaswamy, and J. M. C. Kishen, "Simplified mixture design for production of Self- Consolidating Concrete," *American Concrete Institute*, vol. 112, pp. 277-285, 2015.
- [5] Hanafiah, Saloma, Victor, and N. A. Khoirunnisa, "The effect of w/c ratio on microstructure of self-compacting concrete (SCC) with sugarcane bagasse ash (SCBA)," *AIP Conference Proceedings*, vol. 1903, pp. 050006, 2017.
- [6] F. Ghazi, Kheder, and R. S. A. Jadiri, "New method for proportioning Self-Consolidating Concrete based on compressive strength requirements," *ACI Materials Journal*, vol. 107, pp. 490-497, 2010.
- [7] E. Güneyisi, M. Gesoglu, and E. Özbay, "Permeation properties of Self-Consolidating Concretes with mineral admixtures," *ACI Materials Journal*, vol. 108, pp. 150-158, 2011.
- [8] Painuli, Payal and Uniyal, "Literature review of Self-Compacting Concrete," *International Journal of Technical Research and Applications*, pp. 178-180, 2016.
- [9] Hanafiah, Saloma, and N. K. W. Putri, "The behavior of self-compacting concrete (SCC) with bagasse ash," *AIP Conference Proceedings*, vol. 1903, pp. 050005, 2017.

- [10] Erniati1, M. W. Tjaronge, V. Sampebulu, and R. Djamaluddin, "Porosity and microstructure phase of self compacting concrete using sea water as mixing water and curing," *Advanced Materials Research*, vol. 1119, pp. 647-651, 2015.
- [11] V. M. Reddy, and M. V. S. Rao, "Effect of w/c ratio on workability and mechanical properties og high strength Self Compacting Concrete (M70 Grade)," *Journal of Mechanical and civil Engineering*, vol. 11(5), pp. 15-21, 2014.
- [12] R. Vasusmitha and P. S. Rao, "Strength and durability study of high strength Self Compacting Concrete," *International Journal of Mining, Metallurgy & Mechanical Engineering*, vol. 1, pp. 18-26, 2013.

REGISTRASI KARYA ILMIAH

Berdasarkan data yang terdapat pada kami, maka tulisan/artikel/penelitian dengan judul:

- THE EFFECT OF W/C AND RISK HUSK ASH (RHA) ON MECHANICAL PROPERTIES OF SELF-COMPACTING CONCRETE (SCC)

Termuat dalam International Journal Of Civil Engineering and Technology (IJCIET)

ISSN : 0976-6316

<http://www.iaeme.com/IJCIET/index.asp>

Penulis : Dr. Ir. Hanafiah, MS

Telah teregistrasi dengan No.

NOMOR REGISTRASI																	
0	3	0	1	0	1	0	4	1	8	0	1	0	3	1	7	7	0
Kode Fakultas		Kode PS/Jurusan		Kode Publikasi		Kode Penulis		Tahun Publikasi		Kode Sumber Tulisan		Sumber Dana		Nomor urut Publikasi dan Fakultas			

Inderalaya, 08 Mei 2019

Koord,

Unit PPMK FT. UNSRI



Widya Fransiska FA, S.T., MM., Ph.D
NIP. 197602162001122001