

[2]STUDY ABOUT UTILIZATION OF USED OIL BY CERAMIC MEMBRANE.pdf

By hatta dahlan



1 Study about Utilization of Used Oil by Ceramic Membrane to Separate The Metal Elements

M. Hatta Dahlan*, Yuni Aisyah, Amalia Puteri S

Chemical Engineering study program, Sriwijaya University

*Corresponding Author : halogenated@hotmail.com

ABSTRACT

High quantity of vehicle use have been triggered to increase the use of oil and caused the increase of used oil in environment. Used oil might contained the metallic elements such as aluminum (Al), iron (Fe), copper (Cu) and zinc (Zn). In this study, ceramic membrane was used to separate the metal elements to utilize the used oil. The objective of this research were to investigate the metal separation process from used oil and to analyze the effect of metal separation by using ceramic membrane. The materials that used as membrane component were zeolite, iron powder and clay. Flux analysis showed that ceramic membrane which contain 30% zeolite, 5% iron powder and 65% clay at flowrate 3L/min were resulted in Al 0.12 ppm, 0.12 ppm Fe, Cu 0.003 ppm and Zn 0.07 ppm.

Keywords: ceramic membranes, oil, metallic, flash point.

I. INTRODUCTION

1 High quantity of vehicle use have been triggered to increase the use of oil and caused the 1 increase of used oil in environment. The engine 1 was liquid oil that has been used as cleaner, cover, and lubricant for vehicle machine. The perform of this oil would be decreased after use periodically^[1]. The characteristis of oil would change in colour and composition^[2]. The used oil 1 contained waste namely acid, corosion, and heavy metal^[3]. Used oil might contained the metal 1 elements such as aluminum (Al), iron (Fe), 1 copper (Cu) and zinc (Zn). This waste would 1 came the environmental and health issue for environment. The metal elements in used oil were 1 unwa 1 id elements that should be removed.

Nowadays, membrane technology has been used to separate particle with different size of molecule. Membrane, a tiny media that has 1 1 mpermiabile pore size would passed the small particle and trapped big particle in pore^[4].

One of membrane technology that often used was ceramic membrane. Ceramic membrane was used to separate component that has different molecule size. This microporous membran with asimetric poresize has been applied for microfiltration and ultrafification with random distribution and highly voided molecule^[5]. 1

In this study, the metals were separated from used oil by using ceramic membrane. The 1 id oil that has been already separated from their metals element were expected to be used again as oil for vehicles, asphalt additive, and fuel.

1 The purposes of this study were to investigate the 1 metal separation process from used oil and to analyze what kind of metal elements that could be separated by using ceramic membrane.

II. METHODOLOGY

Materials and Equipments

1 The used oil was obtained from Honda 1 rvice station at Musi Raya Timur Street. The equipments that used in this study were ceramic membrane with zeolite, steel and clay composition, the housing of ceramic membrane, housing filter, oil pump, flowmeter, PVC pipe, analytical balance, plastic container, and plastic pipe.

Methodology

1 The procedure for this experiment were 1 ided into four stages; the preparation of used oil, the equipments instalation, the filtration process using ceramic membrane, and filtrate 1 alysis. Pretreatment process was obtained by heating the used oil at 40°C before use. Before 1 mary treatment, the used oil was passed through zeoilte and silica part for trapped unwa 1 ted waste that has big molecule size.

This study was used three different ceramic membrane; zeolite ceramic membrane 20%, 30%, and ceramic mambrane thatcontain 30% zeolite with steel powder 5% for primary treatment.




1
 Filtrate was taken in every 30 minute in filtration process, with different flowrate treatments. The used oil was passed through filter and at 180 minutes, the used oil was collected in bottle sample for further analysis.


II.RESULT AND DISCUSSION

Ceramic membrane that used in this study were ceramics membrane with composition zeolite 20% - clay 80%; zeolite 30% - clay 70% and zeolite 20% - steel powder 5% - clay 65%.

The correlation between flux and time of those membrane could be seen in Figure 1-3. The graphic showed that the membrane was decreased metals component in used oil.

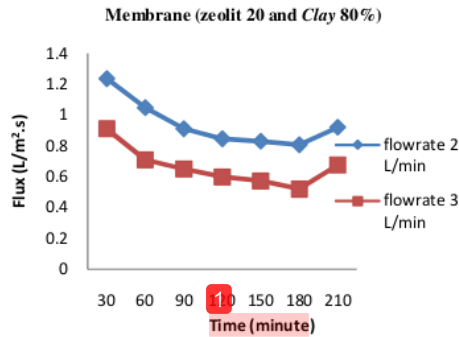


1
Figure 1. the correlation between flux and time (zeolite 20% and clay 80%)

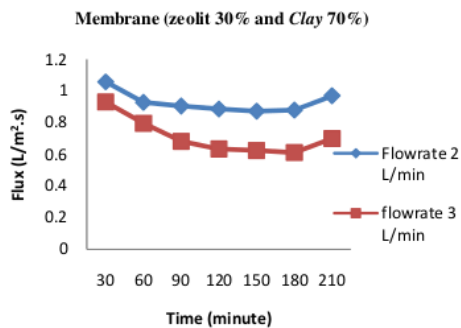

1
Figure 2. the correlation between flux and time (zeolite 30% and clay 70%)

1
 Figure 1-3 showed that the flux value of membrane with flowrate 2L/min was higher than the flux value of membrane with flowrate 3L/min.

1
 It means that the membrane process was affected by flowrate.

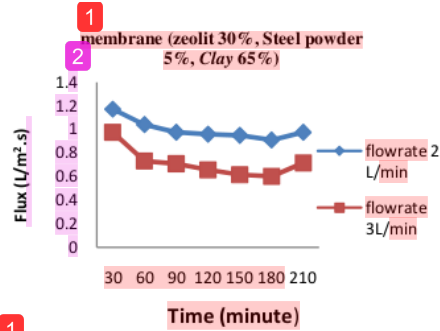


1
Figure 3. the correlation between flux and time (zeolite 30%, steel powder 5% and clay 65%)


1
 The decrease of flux value was affected by operation time. The longer operation time, the lower the flux value. Flux was high at 210 minutes due to at that time backwash occurred. Backwash was done for wash the liquid waste that trapped in ceramic membrane during operation. The waste that formed tiny film through membrane made the membrane perform decreased.

Coefficient of rejection


1
 Coefficient of rejection was calculated the value of membrane to remove the metals element in used oil. The coefficient rejection of Aluminium (Al) could be shown in Figure 4. The higher value of coefficient showed the higher membrane perform to separate the metals from used oil. Figure 4 showed that the maximum value of coefficient rejection for flowrate 2l/min was 47,5% (t= 180 minute) and 50 % for flowrate 3l/min (t= 180 minute)

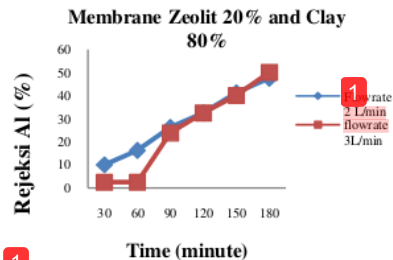

1
Figure 4. The correlation between time and coefficient of rejection of Aluminium (Membrane: Zeolite 20% and Clay 80%)

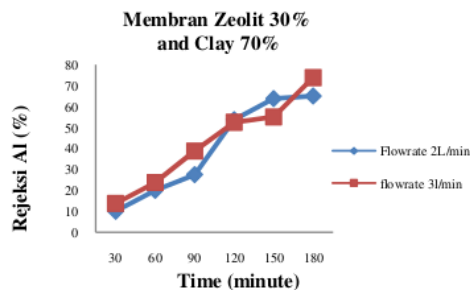

1
Figure 5. The correlation between time and coefficient of rejection of Aluminium (Membrane:Zeolit 30% and Clay 70%)

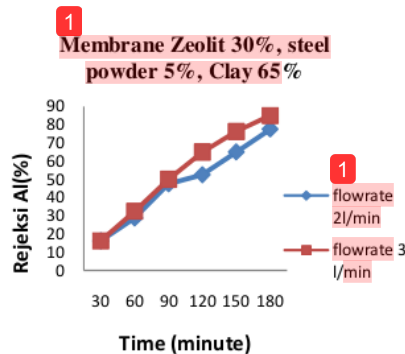


1
Figure 6. The correlation between time and coefficient of rejection of Aluminium (Membrane Zeolit 30%, steel powder 5% and Clay 80%)


Figure 5 showed that the coefficient of rejection was affected by the membrane perform to separate the metals element. The highest coefficient value for flowrate 2L/min was 65% and for flowrate 3L/min was 73,75%.

The highest coefficient of rejection for membrane in Figure 6 was 77,5% at florate 2l/min and 85% for flowrate 3L/min the coefficient rejection value in figure 6 was the highest among other membrane. It means that membrane with composition of Zeolit 30%, steel powder 5% and Clay 80% was the best for separate Aluminium element in used oil among others.

The decrease of Aluminium value removal during operation time

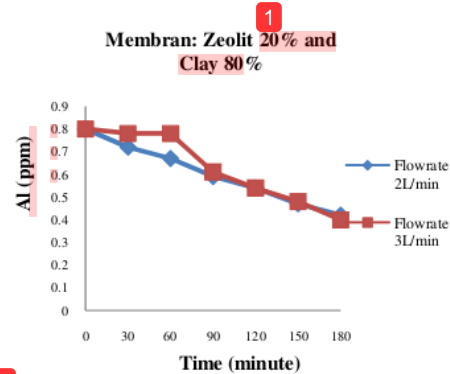


1
Figure 7. The decrease of Aluminium value in used oil during operation time (membrane: zeolite 20% and clay 80%)

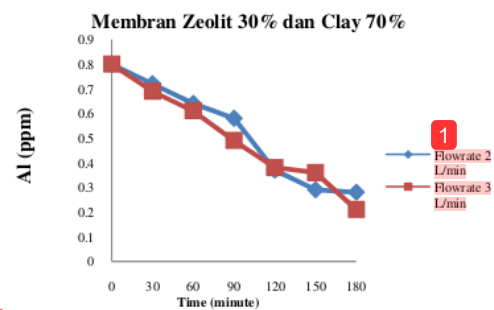

1
Figure 8. The decrease of Aluminium value in used oil during operation time (membrane: zeolit 30% and clay 70%)


It could be seen in Figure 7 that Aluminium value before treatment was 0,8 ppm. After treatment, the aluminium value in used oil was decreased. At flowrate 2L/min (30 minutes), the aluminium value was 0,72 ppm. In minute-180, aluminium value was 0,42 ppm. Flowrate 3 L/min showed that the aluminium value was also decreased from 0,8 to 0,4 ppm.

Figure 8 showed that at flowrate 2L/min the aluminium value was 0,72 to 0,28 ppm. At Flowrate 3 L/min the value was 0,69 to 0,21 ppm. The aluminium value in Figure 9 was 0,67 to 0,18 ppm (at flowrate 2L/min) and was 0,67 to 0,12 ppm (At Flowrate 3 L/min). The longer operation time, the lower the aluminium content in used oil.

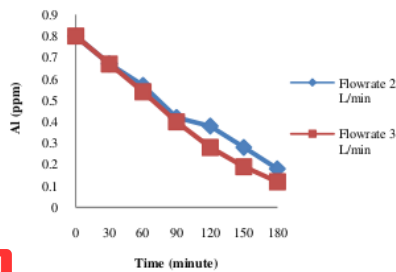


1
Figure 9. The decrease of Aluminium value in used oil during operation time (membrane: zeolit 30%, steel powder 5% and clay 65%).

The Correlation between flash point and operation time

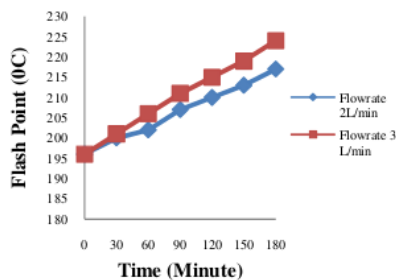


1
Figure 10. The Correlation between flash point and operation time (membrane: Zeolit 20% and clay 80%)

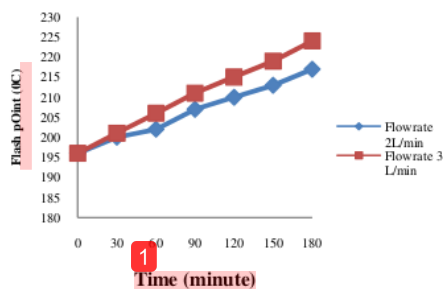

1
Figure 11. The Correlation between flash point and operation time (membrane: zeolit 30% and clay 70%)

1
Figure 10 showed that flash point of used oil before treatment was 196°C. Treatment with flowrate 2L/min, flash point was 199°C to 207°C. It showed that flash point was increased during operation time. Treatment with flowrate 3L/min, the flash point value was ranged between 200°C to 211°C. It could be seen in Figure 11 at flowrate 2L/min, the flash point were ranged between 200°C to 217°C, and at flowrate 3L/min was 201°C to 224°C.

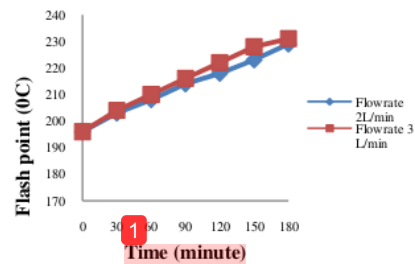

1
Figure 12. The Correlation between flash point and operation time (membrane: zeolit 30%, steel powder 5% and clay 65%)

1
Figure 12 showed that the flash point at flowrate 2L/min were ranged between 203°C to 229°C, and ranged between 204°C to 231°C at flowrate 3L/min.

V. CONCLUSION

1
It can be concluded from the study that the membrane process was affected by flowrate. The flux value of membrane with flowrate 2L/min was higher than the flux value of membrane with flowrate 3L/min. The decrease of flux value was affected by operation time. The longer operation time, the lower the flux value. The higher value of coefficient of rejection showed that the higher membrane perform to separate the metals from used oil. Membrane with composition of Zeolit 30%, steel powder 5% and Clay 80% was the best for separate Aluminium element in used oil among others. The longer operation time, the lower the aluminium content in used oil. It showed that flash point was increased during operation time. The decrease of metals element content in used oil would increase the flash point value. The highest flash point value was 231°C (ceramic membrane with composition of zeolit 30%, steel powder 5% and clay 65% at flowrate 3L/min).



1

1

REFERENCES

- [1] Hudoyo roy, made, dkk. 2011. *Pengujian Pengaruh Penambahan Material Pengotor Oli Bekas Jemuh Sebagai Kandungan Identifikasi Pada Oli Murni*. Prosding Seminar Nasional Sains dan Pendidikan Sains, Vol :8, Salatiga : UKSW.
- [2] Sani. 2010. *Pengaruh Pelarut Phenol Pada Reklamasi Minyak Pelumas Bekas*. Jakarta : Unesa University Press.
- [3] Sukarmin. 2004. *Hidrokarbon dan Minyak Bumi*. Bagian Proyek Pengembangan Kurikulum. Jakarta: DIREKTORAT Pendidikan Menengah dan Kejuruan, DEPDIKNAS.
- [4] Dahlan, Hatta. 2011. *Upaya Mengurangi Dampak Limbah Cair Pada Pabrik Pulp Menggunakan Membran Sintetis*. Jurnal Sintesa Kemika, Vol.8, No.1, 2011: 53-60, Palembang : Fakultas Teknik UNSRI.
- [5] Baker, Richard. 2004. *Membrane Technology And Application*. Edisi 2. England : Mc. Graw-Hill
- [6] Nobel RD, Stern. 1995. *Membrane separation technology Principle and Applications*. Netherlands : Elsevier Science B.V.
- [7] Dahlan, Hatta, E Dewi. 2005. *Prototipe Alat Ultrafiltrasi Membran Untuk Pengolahan Air Siap Diminum*. Jurnal Teknik Kimia. Vol.6. No. 1. 2005 : 24-28. Palembang: Tekim UNSRI.
- [8] Dahlan, Hatta, Lutfia Rahmiati, dkk. 2013. *Pengolahan Limbah Industri Kain Jumputan dengan Menggunakan Membran Keramik*. Palembang : UNSRI.

[2]STUDY ABOUT UTILIZATION OF USED OIL BY CERAMIC MEMBRANE.pdf

ORIGINALITY REPORT

75%

SIMILARITY INDEX

PRIMARY SOURCES

1	ejournal.unsri.ac.id Internet	1716 words — 75%
2	eprints.utm.my Internet	17 words — 1%

EXCLUDE QUOTES OFF

EXCLUDE MATCHES OFF

EXCLUDE BIBLIOGRAPHY OFF