

2

by Dinar Da Putranto

Submission date: 17-Oct-2018 01:15PM (UTC+0800)

Submission ID: 1021494632

File name: ANDRIANI_IJCIET_08_10_107.pdf (1.37M)

Word count: 3888

Character count: 20737



IDENTIFICATION OF LOWLAND CHARACTERISTICS AT TANJUNG API-API AREA USING BY LANDSAT 8

2

Andriani

Doctoral Student of Environmental Science, Sriwijaya University,
Palembang, Indonesia

Civil Engineering Departement, Faculty of Engineering,
Andalas University, Padang, Indonesia

Eddy Ibrahim

Minning Engineering Departement, Faculty of Engineering,
Sriwijaya University, Palembang, Indonesia

2

Dinar Dwi Anugerah Putranto

Civil Engineering Departement, Faculty of Engineering,
Sriwijaya University, Palembang, Indonesia

Azhar Kholiq Affandi

Physics Departement, Faculty of Mathematics and Natural Sciences,
Sriwijaya University, Palembang, Indonesia

ABSTRACT

Tanjung Api-Api area is part of lowlands located in South Sumatera. In order to develop the lowland area into built up area, its necessary to know the physical characteristics of this region. This study aims to determine physical characteristics of lowland using landsat 8 data. The method used in this study were TCT (Tasseled Cap Transformation), NDVI (Normalized Difference Vegetation Index), NDBI (Normalized Difference Built up Index), NDWI (Normalized Difference Water Index). The results showed that using the approach of NDVI, NDBI, NDWI can be determined land use/ land cover (LULC) in the Tanjung Api-Api area. The land use / land cover dominated by vegetated area that consists of secondary mangrove forests, plantations, agriculture, shrubs and rice fields. Besides that there also settlements, industrial buildings, ponds and others. Tanjung Api-Api area has lot of vegetation (dense vegetation) areas which produce a lot of prespiration so that the moisturity at study area is higher compared to the low-vegetated areas/ built up area.

Keywords : Landsat 8, Lowland, Physical characteristics, NDVI, TCT, NDBI, NDWI.

1

Cite this Article: Andriani, Eddy Ibrahim, Dinar Dwi Anugerah Putranto and Azhar Kholiq Affandi, Identification of Lowland Characteristics At Tanjung Api-Api Area Using By Landsat 8, International Journal of Civil Engineering and Technology, 8(10), 2017, pp. 1029–1038.

<http://www.iaeme.com/IJCIET/issues.asp?JType=IJCIET&VType=8&IType=10>

1. INTRODUCTION

Lowlands are areas that the soil is saturated with water, either permanent or temporal. In the lowlands there are various types of vegetation, such as freshwater swamp forest, peat swamp forest, mangrove forest, grassland and others. Conversion of lowlands to built up areas will lead to environmental degradation. Reclamation of swamp area as the settlement area, will caused to a decrease of water absorption, disrupting the hydrological balance in the lowlands (Bolun et al. 2016; Muhammad & Pedia 2012) [3,11].

Tanjung Api-Api area is part of lowland located on the downstream of Musi River Basin, bordering the East Coastal of Sumatra Island. Conversion of Tanjung Api-Api area as special economic zone will caused to high growth of settlements. The Special Economic Zone of Tanjung Api-Api have two functions as a port and industrial area, so that its necessary to conduct research on the physical characteristics of lowlands in this region. Reclamation to acquire dry land will affect environmental conditions. To prevent of environmental degradation, its necessary to know the physical character of the lowland, which includes: land use/ land cover (LULC), vegetation density level, built up area and inundation area or area which has high moisturity. The physical character of the environment can be interpreted using approach of TCT (Tasseled Cap Transformation), NDVI (Normalized Difference Vegetation Index), NDBI (Normalized Difference Built Up Index) and NDWI (Normalized Difference Water Index) (Annemarie 2012; Rayan & Diana 2016; Suwarsono et al. 2013; Zhe et al. 2015) [1, 13,16, 21].

Analysis of environmental processes, monitoring and topographic surveys, dense vegetation or other of local factors could be done with remote sensing techniques (Chen 2002; Dengsheng et al. 2007; Ebtihal 2014; Rawat 2015; Manjunatha et al. 2015) [4,5,6,9,10]. Remote sensing techniques and satellite imageries have been employed to monitor significant land disturbances, spatially and temporally. On February 17th 2013, The Landsat Data Continuity Mission has been a successful launch. LANDSAT 8 satellite has two main sensors: the Operational Land Imager (OLI) and the Thermal Infrared Sensor (TIRS). Advantages use of landsat 8 is a clearer view with better and greater sensitivity to brightness and color than previous (Tri & Intae 2015) [17]. Changes of the land use/ land cover can be interpretation using remote sensing technique, so that can be environmental considerations in the urban planning processes of an increasing number of governments around the world (Xu 2008; Patel et al. 2015; Ramita 2009) [7,12,14].

Classification of land use/ land cover (LULC) used combination band 6, band 5 and band 4 (Red- Green – Blue) by landsat 8 was done to analyze vegetation (Tri and Intae 2015) [17]. Vegetation analysis used Normalized Difference Vegetation Index (NDVI) give advantage of the unique shape of the reflectance curve of vegetation, and has been widely used for mapping vegetation on the global (Ebtihal 2014; Szilard et al. 2016; Vani & Venkata 2017; Youshi et al. 2009) [6,15,19,20]. TCT (Tasseled Cap Transformation) can interpretation of physical characteristics of land using by T-

cap Components i.e. T-cap Brightness, T-cap Greenness (TCG), T-cap Wetness (TGW) and then compare with NDVI value (Baig et al. 2014) [2]. The classification of land use land cover (LULC) was done by using parameters NDVI, NDWI, NDBI and NDBa1. NDVI is used to determine the quality and distribution of vegetation, NDWI to know the characteristics of waters, and NDBI to know the distribution and change of open land (Suwarsono & Khomarudin, 2014) [16].

14

2. MATERIALS & METHODS

2.1. Study Area

The study area is Tanjung Api-Api, Banyuasin district, South Sumatera. In order to develop Tanjung Api-Api area as Special Economic Zone, the Government plans to build infrastructure that could support the potential of the area. Geographically located at coordinates between 104° 45' to 104° 55' E Longitude and 2° 17' to 2° 24' S Latitude (Figure 1). This study area has a wet tropical climate with an average rainfall of 2,723 mm/ year. Topographic conditions are dominated by areas that are relatively flat in the form of coastal areas, tidal swamps and lebak. This area is suitable to be developed as a residential and agricultural area because the slope is 0 - 2% , but the area has flood potential (Banyuasin dalam Angka, 2012).

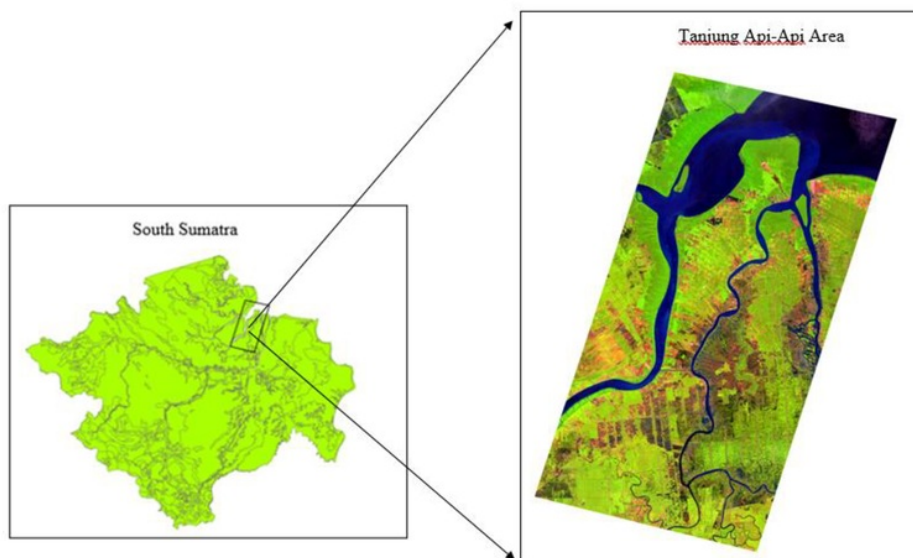


Figure 1. Location of the study area (Landsat WRS Path 124/Row 062)

2.2. Description of The Data

The study involved various activities including data acquisition, data processing and data analysis and interpretation. The remotely sensed data used in this study are data of Landsat 8 that cover area is contained within the Landsat Path/Row 124/062 acquired on 16 December 2016 (resolution 30 m and Satellite imageries were downloaded from United States Geological Survey site). The data has already georeferenced to the UTM coordinate system WGS 1984 (Zone 48 S). On this period was rainy session so that had more precipitation than dry session and resulting in relatively high water content in soils.

1

2.3. Methods

Classification of land use and land cover (LULC) using multispectral composite bands. In this study used composite band; RGB (Red=6; Green=5 and Blue=4). Selection of RGB (6-5-4) because most of the lowland at study area has dense vegetated but the built up area has low density. Maximum likelihood classifier (MLC) was used to classification land use and land cover (LULC), taking into account the spectral characteristics of the satellite images and existing knowledge of land use of the study area. To ensure that the results achieved were accurate, ground checking at study area was done. Table 10 provides detailed spectral characteristics of Landsat OLI/TIRS Spectral Bands. The Landsat 8 image has a red band (R) and near infrared (NIR) that look narrower than the ETM + image. The information on the density of vegetation and its changes, the area of land, and the state of the field can be detected from remote sensing technique using satellite imagery. Landsat 8 has a different range of frequencies along the color electromagnetic spectrum, though not always the color seen by the human eye. Each range is called a band, and Landsat 8 has 11 bands.

Table 1 Multispectral bands of landsat 8

Landsat 8	Spectral Range (µm)	Spatial Resolution (m)
OLI		
Coastal/ Aerosol Blue	Band 1	30
Green	Band 2	30
Red	Band 3	30
Ner-IR	Band 4	30
SWIR-1	Band 5	30
SWIR-2	Band 6	30
Panromatic	Band 7	30
Cirrus	Band 8	30
LWIR-1	Band 9	15
LWIR-2	Band 10	30
	Band 11	30

Source : USGS (United State Geological Survey) landsat 8 product, 2013 [18]

To understand the vegetation performance as one of the objectives NDVI surfaces were generated from the imageries and their values analyzed on a Gis platform. Tasseled Cap Transformation (TCT) is done to know the brightness, wetness and greenness at study area which have relation with land use/ land cover (LULC). Furthermore, to know the density of vegetation done by using NDVI, analyze of NDBI to know the built up area, whereas NDWI is used to know area having high moisture and inundation area. Next calculation of four spectral indices i.e. Tasseled Caps Transformation (TCT), Normalized Difference Vegetation Index (NDVI), Normalized Difference Built up Index (NDBI) and Normalized Difference Water Index (NDWI). TCT were calculated according Table 2, while NDVI, NDBI and NDWI were calculated according to equations (1), (2) and (3). Geographic Information System (GIS) operations were performed with ArcGis 10.2.

Table 2 Tasseled Caps Transformation (TCT) for landsat 8 at satellite reflectance

TCT	Blue Band 2	Green Band 3	Red Band 4	NIR Band 5	SWIR 1 Band 6	SWIR2 Band 7
Brightness	0.3029	0.2786	0.4733	0.5599	0.5080	0.1872
Greenness	-0.2941	-0.2430	-0.5424	0.7276	0.0713	-0.1608
Wetness	0.1511	0.1973	0.3283	0.3407	-0.7117	-0.4559

Source : Baig et.al., 2014 [2]

Formula for calculate NDVI, NDBI and NDWI on Landsat - 8 OLI.

$$NDVI = \frac{NIR - RED}{NIR + RED} = \frac{B5 - B4}{B5 + B4} \quad (1)$$

$$NDBI = \frac{SWIR - NIR}{SWIR + NIR} = \frac{B6 - B5}{B6 + B5} \quad (2)$$

$$NDWI = \frac{GREEN - SWIR}{GREEN + SWIR} = \frac{B3 - B6}{B3 + B6} \quad (3)$$

3. RESULT AND DISCUSSION

3.1. Interpretation of Land Use/ Land Cover (LULC) with composite band, NDVI and NDBI

RGB of Landsat 8 (band 6, 5, 4) color composite contains the same 3 bands as the previous, because vegetation reflects higher in the near infrared than the other two bands, the green color dominates. So this combination will makes the vegetation look more natural. The composite band 654 (Red=6; Green = 5 and Blue= 4) was chosen at this study because Tanjung Api-Api area is an area that has high vegetation. Figure 2a showed the composite band with unsupervised classification, while Figure. 2b showed the composite band that has been classified in a supervised maximum likelihood. The land use / land cover dominated by vegetated area that consists of secondary mangrove forests, plantations, agriculture, shrubs and rice fields. Land use such as settlements, industrial buildings and ponds is least. Tanjung Api-Api area has lot of vegetation areas which produce a lot of prespiration so that the moisture at study area is higher compared to the low vegetated areas/ built up area. Interpretation of land use/ land cover (LULC) can be using NDVI, because it can be known the level of density and greenness of vegetation. Table 3 showed the spectral values of NDVI based on vegetation density levels.

Table 3 Spectral values of NDVI based on vegetation density level at study area


NDVI Value	Vegetation Density	Land Use/ Land Cover (LULC)
-0.803-0.0842	Non vegetation	Water body, river and pond
0.0842- 0.214	Non vegetation	Settlement area, industry building and bare soil.
0.214 – 0.453	Rarely vegetation	shrubs
0.453 – 0.710	Medium vegetation	Rice fields and dry farms mixed with shrubs
0.710 – 0.883	Dense vegetation	Mangrove forests and plantations

NDVI values obtained by calculated of near infrared with visible light reflected by the plant. Based on NDVI calculations, most of Tanjung Api-Api areas are vegetated areas with high density.


Figure 2 (c) showed dense vegetation predominantly on coastal areas, this area is mangrove forest and coconut plantation area. Medium density areas are characterized by greenish colour, dominated by agricultural areas of rice fields and agriculture of mixed shrubs, whereas rarely density was dominated by shrubs and non-vegetated areas were waters/ water bodies, settlements and open land areas.




(2a) Composite Band (RGB = 6-5-4), before classification

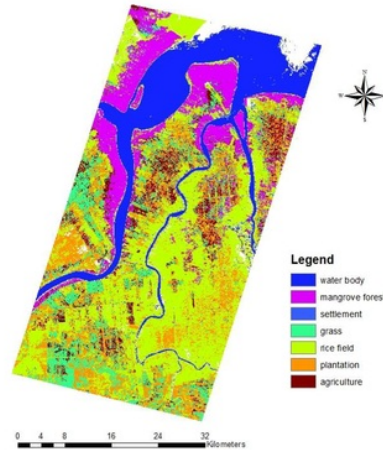

(2b) Composite Band (RGB = 6-5-4), after Supervised Maximum Likelihood classification.

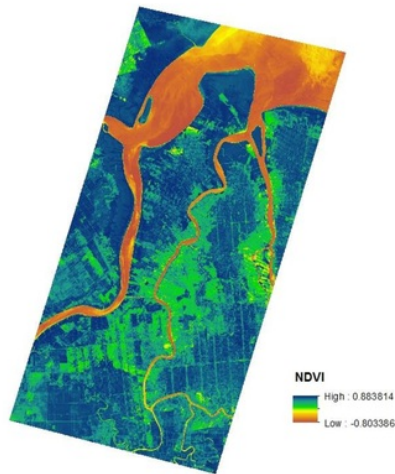

(2c) Classification of LULC using NDVI

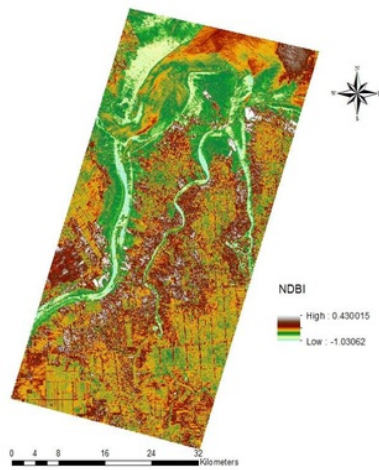

(2d) Classification of LULC using NDBI

¹⁵
Figure 2. Classification of Land Use/ Land Cover (LULC)

⁶ The NDBI index will focus on highlighting urban areas or built areas where there is usually a higher reflection in the Shortwave Infrared (SWIR) area, when compared to Near-Infrared (NIR) areas. This application is very useful for monitoring and planning of land use/land cover (LULC). Figure 2(d) showed, in Tanjung Api-Api area there are little areas that are built and the area is still dominated by vegetation. In general, area conversion is used for plantation and agriculture, and a small part is for residential areas and industrial buildings. Built-up areas exhibit higher heat conductivity than bare soil areas, resulting in the higher emissivity and albedo values of thermal infrared waves in built-up areas relative to bare soil areas. The region with spectral value greater than 0.1 are plantation and agriculture area whereas the region having spectral value greater than 0.3 are settlement area and spectral value smaller than -1.0 are water body and vegetation area.

3.2. Interpretation of Lowland Characteristic with Tasseled Caps Transformation (TCT)

Brightness and Greenness bands are the important components mostly used to interpret the land use/landcover. Figure 3 showed high of brightness value at built-up areas, man-made features, roads and bare soil, its caused by high reflectance. Brightness responds to the physical properties that affect the total reflection. The brightness value indicates the built up area, the result of the interpretation indicates that in the Tanjung Api- Api area has occurred conversion of lowlands used for agriculture and plantation, while for the settlement is lower than vegetation area. Figure 3(a) showed brightness and built up areas, roads, concrete structure and soil without vegetation are shown as red or approximately purple. Figure 3(b) showed interpretation of vegetation at study area. Greenness value is responsive to the characteristic of healthy vegetation, higher of value greenness showed dense of vegetation. The greenness value indicated health and density of plant, in this research the highest of greenness value obtained by mangrove forest and plantation (spectral value between 0.167 to 0.367), rice field and shrub have spectral value between 0.07 to 0.163 while the spectral value for settlements, industrial buildings and water bodies are negative.


3.3. Interpretation of Lowland Characteristic with Tasseled Caps Wetness and NDWI (Normalized Difference Water Index)

⁴ NDWI can effectively distinguish water and vegetation and extract water bodies. With combining ratio two different bands, the NDWI index enhances water spectral signals, in the NIR range, water has a strong absorption capacity, unlike vegetation. By using NDWI (Normalized Difference Water Index) and TCW (Tasseled Cap Wetness) could be interpreted areas that have high moisture and waterlogged/inundation areas.

The Areas that have a dense vegetation is an area that has a high moisture. Figure 3c and 3d, showed that Tanjung Api-Api area has high moisture level especially in area of mangrove forest, plantation and agriculture. The areas that have dense vegetation will have high moisture value and otherwise areas with low vegetation will have low moisture values. Table 4 showed the spectral values of NDWI to interpretation of land use/land cover (LULC).


¹⁶ **Table 4** Spectral values of NDWI to Interpretation Land Use/ Land Cover (LULC)

NDWI Value	Land Use/ Land Cover (LULC)
-0.695 to -0.399	Plantation and dry farms mixed with shrubs
-0.400 to -0.204	Mangrove forests
-0.205 to 0.153	Rice fields
0.154 to 0.589	Inundation area
0.590 to 1.00	Water body and river

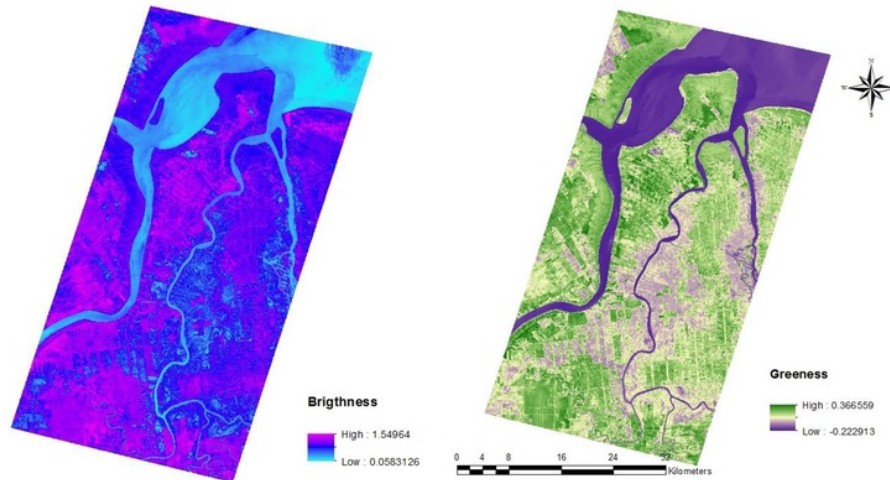

(3a) Tasseled Cap Brightness

(3b) Tasseled Cap Greenness

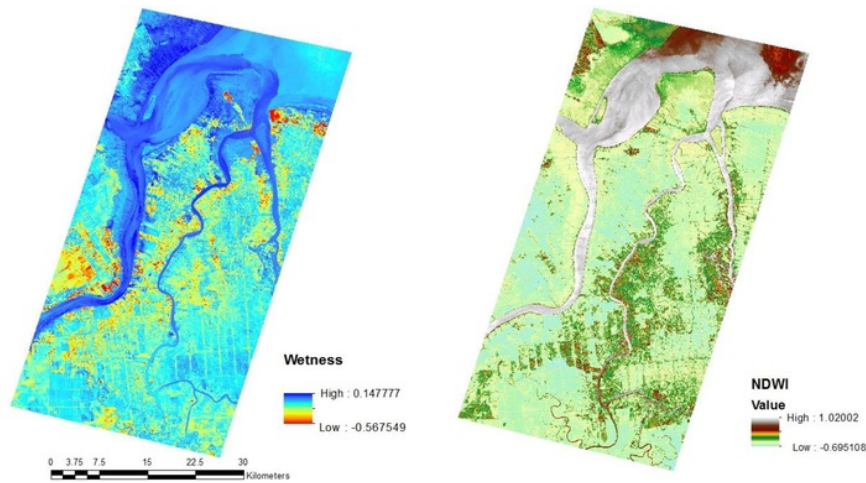

(3c) Tasseled Cap Wetness

(3d) NDWI value

Figure 3. Interpretation characteristic of Lowland using TCT and NDWI

4. CONCLUSION

Remote sensing techniques can be used to interpreted lowland characteristics. Lowland characteristics are strongly influenced by the presence of water, to determined the moisturity of the lowland area could be done by using the approach value of NDWI and TCW. Areas with high density (NDVI values is high) will have high moisturity (NDWI value is high) but areas with low vegetation densities will have NDWI values is low.

NDVI values for vegetated areas have spectral values between 0.214 and 0.883, while residential and industrial areas have a spectral value of 0.0842 to 0.214, and aquatic area has a spectral value between -0.803 to 0.0842. The settlement area has a NDBI greater than 0.3. While the innudation area and river have NDWI values between 0.154 to 1.00. Analysis by TCT (Tasseled Caps Transformation) showed the brightness value indicates the built up area, the result of the interpretation indicates that in the Tanjung Api- Api area has occured conversion of wetlands used for agriculture and plantation, while for the settlement is lower than vegetation area

Land use/ Land Cover (LULC) in Tanjung Api-Api area is dominated by vegetation consist of mangrove forest, plantation, rice field, agriculture and shrubland. Tanjung Api-Api areas have high vegetation density but the built up areas is low, so the area has high of moisturity.

5. ACKNOWLEDGEMENTS

Government of Banyuasin District that has provided secondary data of Banyuasin and surrounding districts for the purposes of this study.

REFERENCES

- [1] Annemarie, S. Monitoring land cover change in urban and per-urban using dense time stacks of landsat satellite data and a data mining approach. *Remote Sensing of Enviroment*, **124**, 2012, pp. 689-704 .
- [2] Baig, M.H.A., Lifu, Z., Tong, S. and Qingxi, T. Derivation of a tasselled cap transformation based on Landsat 8 at-satellite reflectance. *Remote Sensing*, **5**(5), 2014, pp. 423–431.
- [3] Bolun, L., Chaopu, T., Yongqiang, Z. and Xiaoyuan, Y. Estimating Soil Moisture with Landsat Data and Its Application in Extracting the Spatial Distribution of Winter Flooded Paddies. *Remote Sensing*, **8**(1), 2016.
- [4] Chen, X. Using remote sensing and GIS to analyse land cover change and its impacts on regional sustainable development. *International Journal of Remote Sensing*, **23**, 2002, pp. 107–124 .
- [5] Dengsheng, L. and Qihao, W. A survey of image classification methods and techniques for improving classification performance. *International Journal of Remote Sensing*, **28**(5), 2007, pp. 823–870.
- [6] Ebtihal, T. H. Using (NDVI), (NDBI) and (NDWI) Indexes for Change Detection in Land Cover for Selected Area from the Province of Najaf for the Period from (2001-2006) by Using Remote Sensing Data. *Journal of Kufa – Physics*, **6** (2), 2014, pp.12-18.
- [7] H. Xu. Modification of normalised difference water index (NDWI) to enhance open water features in remotely sensed imagery. *International Journal of Remote sensing*, **27**(14), 2006.
- [8] H. Xu. A new index for delineating built-up land features in satellite imagery. *International Journal of Remote Sensing*, **29**(14), 2008. pp. 4269–4276.

- [9] J. Rawat., Manish, K. Monitoring Land use/ Cover Change Using Remote Sensing and GOS Technique: a Case Study of Hawallbagh block, district Almora, Uttarakhand, India. *Egypt Journal of Remote Sensing and Space Science*, **18**, 2015, pp. 77-84.
- [10] Manjunatha, M.C., Basavarajappa, H.T. and Jeevan, L. Geomatics Analysis on Land Use Land Cover Classification System in Precambrian Terrain of Chitradurga District Karnatka, India. *International Journal of Civil Engineering and Technology*, **6**(2), 2015, pp. 46-60.
- [11] Muhammad, R and Pedia, A. Dampak Perubahan Hidrologis dan Perkembangan Tata Guna Lahan pada Permukiman di Lahan Basah di Kota Dumai. *Jurnal Arsitektur Universitas Bandar Lampung*, **1**(3), 2012, pp.36-39.
- [12] Patel, V.M., Dholakia, M. B. and Ray, S. S. Remote Sensing Techniques for Land Use/Land Cover Mapping in Mahi Right Bank Canal Command Area, Gujarat. *Journal of Civil Engineering and Technology*, **2**(2), 2015, pp. 01-10.
- [13] Rayan, H. A. and Diana, M. Using Landsat-8 Data to Explore The Correlation Between Urban Heat Island and Urban Land Uses. *International Journal of Research in Engineering and Technology*, **05** (03), 2016, pp. 457 – 466.
- [14] Ramita, M., Inakwu, O.A.O. and Tiho, A. Improving the Accuracy of Land Use and Land Cover Classification of Landsat Data Using Post-Classification Enhancement. *Remote Sensing*, **1**, 2009, pp. 330-344.
- [15] Szilard, S., Zoltan, G., and Boglarka, B. Specific Features of NDVI, NDWI and MNDWI as Reflected in Land Cover Categories. *Landscape & Environment*, **10** (3-4), 2016, pp. 194-202.
- [16] Suwarsono, Jalu, T.N. and Wiweka. Identification of Inundated Area Using Normalized Difference Water Index (NDWI) on Lowland Region of Java Island. *International Journal of Remote Sensing and Earth Science*, **10**(2), 2013, pp. 114-121.
- [17] Tri, D.A. and Intae, Y. Exploring Landsat 8. *International Journal of IT, Engineering and Applied Sciences Research*, **4**(4), 2015, pp. 4 -10.
- [18] USGS (United State Geological Survey) landsat 8 product, 2013 USGS. http://www.landsat.usgs.gov/Landsat8_Using_Product.php.
- [19] Vani ,V and Venkata Ravibabu Mandla. Comparative Study of NDVI and SAVI Vegetation Indices in Anantapur District Semi-Arid Areas. *International Journal of Civil Engineering and Technology*, **8**(4), 2017, pp. 559–566.
- [20] Youshi, Z., Inakwu, O.A.O. and Chunfeng, H. Bitemporal characterization of land surface temperature in relation to impervious surface area, NDVI and NDBI, using a sub-pixel image analysis. *International Journal of Applied Earth Observation and Geoinformation*, **11**(4), 2009, pp. 256–264.
- [21] Zhe, Z., Shixiong, W., and Curtis, E.W. Improvement and expansion of the Fmask algorithm: Cloud, cloud shadow, and snow detection for Landsats 4–7, 8, and Sentinel 2 images. *Remote Sensing of Environment*. **159**, 2015, pp. 269–

ORIGINALITY REPORT

16%

SIMILARITY INDEX

%

INTERNET SOURCES

16%

PUBLICATIONS

0%

STUDENT PAPERS

PRIMARY SOURCES

-
- 1** Taiwo O. Durotoye, Joseph O. Akinmusuru, Kunle E. Ogundipe. "Experimental datasets on engineering properties of expansive soil treated with common salt", Data in Brief, 2018
Publication 2%
-
- 2** Indrayani, Erika Buchari, Dinar D. A. Putranto, Edward Saleh. "Analysis of land use in the Banyuasin district using the image Landsat 8 by NDVI method", AIP Publishing, 2017
Publication 1%
-
- 3** F. Bektas Balcik, E. M. Ergene. "DETERMINING THE IMPACTS OF LAND COVER/USE CATEGORIES ON LAND SURFACE TEMPERATURE USING LANDSAT8-OLI", ISPRS - International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences, 2016
Publication 1%
-
- 4** Gao, H, L Wang, L Jing, and J Xu. "An effective modified water extraction method for Landsat-8 OLI imagery of mountainous plateau 1%

regions", IOP Conference Series Earth and Environmental Science, 2016.

Publication

5

As-syakur, Abd. Rahman, I Wayan Sandi Adnyana, I Wayan Arthana, and I Wayan Nuarsa. "Enhanced Built-Up and Bareness Index (EBBI) for Mapping Built-Up and Bare Land in an Urban Area", Remote Sensing, 2012.

Publication

1%

6

Bandi Sasmito, Andri Suprayogi. "Spatial Analysis of Environmental Critically due to Increased Temperature in The Built Up Area With Remote Sensing", IOP Conference Series: Earth and Environmental Science, 2018

Publication

1%

7

Jianbin Tao, Yong Zhou, Wenbin Wu, Lei Yu. "Estimating carbon dioxide concentrations in urban areas from satellite imagery using Bayesian network", 2014 The Third International Conference on Agro-Geoinformatics, 2014

Publication

1%

8

Manandhar, Ramita, Inakwu O. A. Odeh, and Tiho Ancev. "Improving the Accuracy of Land Use and Land Cover Classification of Landsat Data Using Post-Classification Enhancement",

1%

Remote Sensing, 2009.

Publication

9

Y. Zha. "Use of normalized difference built-up index in automatically mapping urban areas from TM imagery", International Journal of Remote Sensing, 2/10/2003

Publication

1%

10

Li, Bolun, Chaopu Ti, Yongqiang Zhao, and Xiaoyuan Yan. "Estimating Soil Moisture with Landsat Data and Its Application in Extracting the Spatial Distribution of Winter Flooded Paddies", Remote Sensing, 2016.

Publication

1%

11

Mohammad Subzar Malik, J. P. Shukla. "Retrieving of Land Surface Temperature Using Thermal Remote Sensing and GIS Techniques in Kandaihimmat Watershed, Hoshangabad, Madhya Pradesh", Journal of the Geological Society of India, 2018

Publication

1%

12

Paul Macarof, Florian Starescu. "Comparasion of NDBI and NDVI as Indicators of Surface Urban Heat Island Effect in Landsat 8 Imagery: A Case Study of Iasi", Present Environment and Sustainable Development, 2017

Publication

1%

13

M.P. Wylie-Green. "Dynamic spectrum sensing

by multiband OFDM radio for interference mitigation", First IEEE International Symposium on New Frontiers in Dynamic Spectrum Access Networks, 2005. DySPAN 2005., 2005

Publication

1%

14

Sterk, Geert. "Optimal land use/land cover classification using remote sensing imagery for hydrological modeling in a Himalayan watershed", Journal of Applied Remote Sensing, 2009.

Publication

1%

15

Xiong, Yongzhu, Shaopeng Huang, Feng Chen, Hong Ye, Cuiping Wang, and Changbai Zhu. "The Impacts of Rapid Urbanization on the Thermal Environment: A Remote Sensing Study of Guangzhou, South China", Remote Sensing, 2012.

Publication

1%

16

Nguyen, Anh Kim, Yuei-An Liou, Ming-Hsu Li, and Tuan Anh Tran. "Zoning eco-environmental vulnerability for environmental management and protection", Ecological Indicators, 2016.

Publication

<1%

17

Zhu, Zhe, Yingchun Fu, Curtis E. Woodcock, Pontus Olofsson, James E. Vogelmann, Christopher Holden, Min Wang, Shu Dai, and Yang Yu. "Including land cover change in

<1%

analysis of greenness trends using all available
Landsat 5, 7, and 8 images: A case study from
Guangzhou, China (2000-2014)", Remote
Sensing of Environment, 2016.

Publication

Exclude quotes On
Exclude bibliography On

Exclude matches < 15 words