

File ASL

By Bhakti Suprpto

WORD COUNT

3205


TIME SUBMITTED

19-MAR-2022 09:47PM

PAPER ID

83837473

Home / Advanced Science Letters, Volume 23, Number 5



Attitude and Altitude Control of a Quadcopter Using Neural Network Based Direct Inverse Control Scheme

Buy Article:
\$105.00 plus tax
(Refund Policy)
[ADD TO CART](#)
[BUY NOW](#)

Sign-In - [Register](#)

Username:

Password:

[SIGN IN NOW](#)

Remember Login Login reminder

[OpenAthens](#) [Shibboleth](#)

Authors: Heryanto, M. Ary; Suprijono, Herwin; Suprpto, Bhakti Yudho; Kusumoputro, Benyamin
Source: Advanced Science Letters, Volume 23, Number 5, May 2017, pp. 4060-4064(5)
Publisher: American Scientific Publishers
DOI: <https://doi.org/10.1166/asl.2017.8328>

[< previous article](#) [view table of contents](#) [next article >](#) [ADD TO FAVOURITES](#)

Abstract | [References](#) | [Citations](#) | [Supplementary Data](#) | [Article Media](#) | [Metrics](#)

This paper proposes the application of Neural Network based Direct Inverse Control (DIC) for the attitude and altitude control of quadcopter unmanned aerial vehicle (UAV). The backpropagation learning algorithm were utilized in order to find the appropriate connection weights of neurons by using real quadcopter flight data on hovering state. The experimental results showed that the NN-controlled quadcopter can follow the desired trajectory and maintain the hovering state at different levels of altitude with low errors. This results have proven that the performance of the proposed NN DIC controller in controlling a quadcopter UAV is satisfying.

Keywords: Backpropagation Algorithm; Direct Inverse Control; Neural Network; Quadcopter

Document Type: Research Article

Affiliations: Universitas Indonesia, Depok, Indonesia

Publication date: May 1, 2017

[More about this publication?](#)

- ### Tools
- [Reference exports +](#)
 - [Linking options +](#)
 - [Receive new issue alert](#)
 - [Latest TOC RSS Feed](#)
 - [Recent Issues RSS Feed](#)
 - [Get Permissions](#)
 - [Favourites](#)

Pilih Bahasa

Diberdayakan oleh [Google Terjemahan](#)


Share Content

[f](#) [t](#) [in](#) [more](#)

- ### Access Key
- [F](#) Free content
 - [P](#) Partial Free content
 - [N](#) New content
 - [O](#) Open access content
 - [PO](#) Partial Open access content
 - [S](#) Subscribed content
 - [PS](#) Partial Subscribed content
 - [T](#) Free trial content

Advanced Science Letters

ISSN 1936-6612 (Print)



ADVANCED SCIENCE LETTERS is an international peer-reviewed journal with a very wide-ranging coverage, consolidates research activities in all areas of (1) Physical Sciences, (2) Biological Sciences, (3) Mathematical Sciences, (4) Engineering, (5) Computer and Information Sciences, and (6) Geosciences to publish original short communications, full research papers and timely brief (mini) reviews with authors photo and biography encompassing the basic and applied research and current developments in educational aspects of these scientific areas.

Publisher: American Scientific Publishers
[More about this publication?](#)

Volume 23, Number 5, May 2017
[previous issue](#) [all issues](#) [next issue](#)

Contents [Links](#) [Supplementary Data](#)

[Add all to Favourites](#)

research-article

Selected Peer-Reviewed Articles from the International Conference on Mathematics and Science Education (InCoMS2016), Bandung, Indonesia, 31 May–2 June, 2016
 pp. 3817-3818(2)
Authors: Hussain, Azham; Mat, Ruzinoor Che; Rahim, Yahaya Abd; Pee, Ahmad Naim Che; Sulaiman, Harnzah Asyran

Favourites:
 ADD

Arduino Based Automatic Air Control System with Pulse Width Modulation
 pp. 3819-3823(5)
Authors: Castilla, Derrick J; Caldo, Rionel Belen

Favourites:
 ADD

Effect of Different Automobile Cabin Geometry to Acoustic Cavity Mode Analysis
 pp. 3824-3828(5)
Authors: Wong, Azella Aziz; Abu, Aminudin; Mansor, Shuhaimi; Rudin, Noor Fawazi Md Noor; Johar, Azri Hazwan; Yotim, Norfazrina Hayati Mohd

Favourites:
 ADD

Voltage Regulation Using Hybrid PI-Fuzzy Logic Controller Based Static Var Compensator for Maintaining Power Quality
 pp. 4055-4059(5)
Authors: Winarno, Istiyo; Suryatmojo, Heri; Ashari, Mochamad

Favourites:
 ADD

Attitude and Altitude Control of a Quadcopter Using Neural Network Based Direct Inverse Control Scheme
 pp. 4060-4064(5)
Authors: Heryanto, M. Ary; Suprjono, Herwin; Suprpto, Bhakti Yudhi; Kusumaputra, Benyamin

Favourites:
 ADD

Implementation of SOA and EDFA Combination in DWDM System
 pp. 4065-4067(3)
Authors: Ismail, Khadjah; Menon, P. Sushitha; Shaari, Sahbudin

Favourites:
 ADD

Improving Accuracy of Decoding Process with Pore-Based Fingerprint Fuzzy Vault in Biometric Cryptosystem
 pp. 4068-4073(6)
Authors: Mahmud, Siti Munawwarah; Daud, Salwani Mohd; Yuhani, Siti Sophiyati; Azlan, Azizul; Sjarif, Nilam Nur Amir

Favourites:
 ADD

Effect of Cloud Computing and Information Technology Capability to Innovation Capability, Case Study in Digital Creative Industry
 pp. 4074-4076(3)
Author: Heripracoyo, Sulisty

Favourites:
 ADD

Sign-in - [Register](#)

Username:

Password:

Remember Login Login reminder

[OpenAthens](#) [Shibboleth](#)

Tools

-  [Receive new issue alert](#)
-  [RSS for latest issue](#)
-  [RSS for recent issues](#)
-  [Reference exports +](#)
-  [Linking options +](#)
-  [Favourites](#)









Pilih Bahasa 

Dibutuhkan oleh [Google](#) [Terjemahan](#)

Share Content

   [more](#)

Access Key

-  [Free content](#)
-  [Partial Free content](#)
-  [New content](#)
-  [Open access content](#)
-  [Partial Open access content](#)
-  [Subscribed content](#)
-  [Partial Subscribed content](#)
-  [Free trial content](#)



AMERICAN
SCIENTIFIC
PUBLISHERS

Copyright © 2015 American Scientific Publishers

All rights reserved

Printed in the United States of America

Advanced Science Letters

Vol. XXXXXXXXX

Attitude and Altitude Control of a Quadcopter using Neural Network Based Direct Inverse Control Scheme

M Ary Heryanto^{1,2}, Herwin Supriyono^{1,2}, Bhakti Yudho^{1,3}, Benyamin Kusumoputro¹

¹Universitas Indonesia, Depok, Indonesia

²on leave from Universitas Dian Nuswantoro, Semarang, Indonesia

³on leave from Universitas Sriwijaya, Palembang, Indonesia

3

This paper proposes the application of Neural Network based Direct Inverse Control (DIC) for the attitude and altitude control of quadcopter unmanned aerial vehicle (UAV). The backpropagation learning algorithm were utilized in order to find the appropriate connection weights of neurons by using real quadcopter flight data on hovering state. The experimental results showed that the NN-controlled quadcopter can follow the desired trajectory and maintain the hovering state at different levels of altitude with low errors. This results have proven that the performance of the proposed NN DIC controller in controlling a quadcopter UAV is satisfying.

29

Keywords: Backpropagation algorithm, Direct Inverse Control, Neural Network, Quadcopter.

1 INTRODUCTION

A quadcopter is classified as a rotary wing with four rotors located at its four corners. The advantage of this structure laid on the ability to perform Vertical Take Off and Landing (VTOL), high maneuverability along its course, and stable hovering^{1,2}. Therefore, a quadcopter based unmanned aerial vehicle (UAV) provides exceptional benefits and is eligible for many civil and military applications such as aerial observation, photography, security monitor, search and rescue missions and other comparative applications³⁻⁷.

A quadcopter is intended to have the capability as a helicopter, with a more straightforward mechanical system yet more stable in its maneuvers because of a four motors system. On the other hand, a quadcopter is a very dynamic system due to the non-linear characteristic of the plant, under actuated and cross-coupling from its

gyroscopic moments of the motors^{8,9}. Thus, controlling the quadcopter within a six degree of freedom (DoF) is a challenging problem.

Some of the most widely used control methods for a quadcopter are PID, LQR, and Backstepping. PID and LQR control algorithms are a linear control algorithm that is not suitable for non-linear systems, while the robustness of a Backstepping control algorithm is still questionable¹⁰.

Some researchers have developed various neural network based control systems and all methods revealed a good performance characteristics¹¹⁻¹⁴. In the previous studies, we have also developed a quadcopter control system using neural network-based inverse system in a Direct Inverse Control (DIC) scheme¹⁵. The cross configuration quadcopter system was developed in the Computational Intelligence and Intelligent Systems Laboratory, Universitas Indonesia. The back propagation

*Corresponding author: kusumo@ee.ui.ac.id

neural networks based inverse (BPNN-INV) control system that was used as the quadcopter controller system, however, is trained and tested by using a database taken from a stationary vertical test-bed system. As the consequence, the database obtained from this experiment is valid for a constant altitude condition only. In order to develop an autonomous BPNN-INV control system, in this paper, the neural networks based inverse system is trained by using a real data flight of the quadcopter.

This paper is structured as follows. Section 2 introduces the structure of Quadcopter. The dynamics and kinematics of quadcopter model. The experimental data acquisition is also put forward in this section. The neural network control algorithm is discussed in Section 3, followed by the elaboration of simulation results on the experimental data in Section 4. Finally, our work in this paper is summarized in the last section.

2 THE QUADCOPTER AND DATA ACQUISITION

A. Quadcopter Model

The dynamic model of the quadcopter is defined by dividing the system into two reference frames as shown in Fig. 1. A body frame (BF) is the first reference frame, where the OB (X, Y, Z) is chosen to coincide with the center of mass. The second reference frame is the earth frame (EF), where the OE (x, y, z) is the axis origin. The position and orientation of the BF or the quadcopter is described with respect to the EF reference frame¹⁶.

The quadcopter used a fixed pitch blade at each motor, so that the motor generates an equal thrust on the quadcopter movement. The front (M1) and rear (M3) motors rotate clockwise, while the other two motors (M2, M4) rotate counter clockwise (Fig. 1), hence, these motors configuration structure canceled the rotational torque for a stable movement of the quadcopter. The movement of the quadcopter is then only controlled by increasing or decreasing the rotor speed.

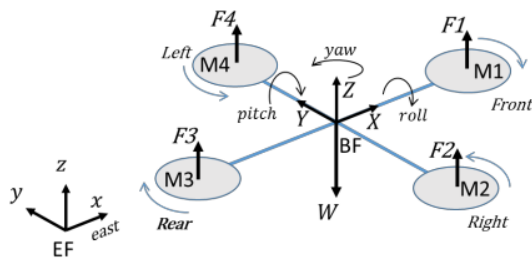


Fig. 1. Quadcopter basic movement

Increasing or decreasing the four propeller rotation at the same velocity produces an U_1 force for a vertical movement (Z_B axis), and the U_1 force generated by the same velocity of the motors has to be equal with the thrust required in a determined altitude for a hovering movement of the quadcopter. Changing the velocity of the propeller 2 and 4, respectively, i.e., Ω_2, Ω_4 , creates an U_2

force for a roll (ϕ) rotation. The U_2 force produced by changing the speed of the propellers rotation makes the quadcopter rolling to the right or left in the Y_B axis, if the quadcopter is already stable by a determined U_1 force for a determined altitude.

Likewise, changing the velocity of the propeller 1 and 3, respectively, i.e., Ω_1, Ω_3 , creates a U_3 force for a pitch (θ) rotation. The produced U_3 force makes a forward or a backward movement in the X_B axis. As the same with the condition in a rolling movement, the quadcopter should be in a stable condition of hovering state that the changing velocity of the propeller 1 and 3 makes the quadcopter moving forward or backward.

When making a different motor speed between each pair of 2 blades, i.e., a counter-torque is generated by the motors system, the U_4 force makes a yaw (ψ) rotation. Thus, the quadcopter is driven by four rotors that would produce a controlled thrust and torque to move from one point to others with a determined roll, pitch, and yaw moving condition. However, although quadcopter has the ability to move in a 6 DoF system, only a 4 DoF movement that are controlled directly by the four rotors^{17,19}.

To simplify the modeling of a quadcopter, some assumptions are adopted such as: the quadcopter structure is rigid and symmetrical, the propellers are rigid, thrust and drag forces are proportional to the square of propellers speed rotation, and the distribution of the quadcopter mass is symmetrical²⁰⁻²². These assumptions make it difficult to develop a model of quadcopter as realistically as possible.

The equation of motion of the quadcopter is obtained using Newton-Euler formalism. The translational and rotational dynamics of quadcopter can be described by (1):

$$\begin{aligned} \ddot{X} &= (s\psi \cdot s\phi + c\psi \cdot s\theta \cdot c\phi) \frac{U_1}{m} \\ \ddot{Y} &= (-c\psi \cdot s\phi + s\psi \cdot \theta \cdot c\phi) \frac{U_1}{m} \\ \ddot{Z} &= -g + (c\theta \cdot c\phi) \frac{U_1}{m} \\ \dot{p} &= \frac{I_{yz}}{I_{xx}} qr - \frac{J_{TP}}{I_{xx}} q\Omega + \frac{U_2}{I_{xx}} \\ \dot{q} &= \frac{I_{zz} - I_{xx}}{I_{yy}} pr - \frac{J_{TP}}{I_{yy}} p\Omega + \frac{U_3}{I_{yy}} \\ \dot{r} &= \frac{I_{xx} - I_{yy}}{I_{zz}} pq + \frac{U_4}{I_{zz}} \end{aligned} \quad (1)$$

where $\ddot{X}, \ddot{Y}, \ddot{Z}$ the linear accelerations of quadcopter with respect to EF; the $\dot{p}, \dot{q}, \dot{r}$ angular accelerations of quadcopter with respect to BF, s and c are the respective of \sin and \cos , J_{TP} the total rotational moment of inertia around the propeller axis, m the mass of the quadcopter, g the acceleration due to gravity, I_{xx}, I_{yy}, I_{zz} the body moment of inertia, and p, q, r the angular velocities of quadcopter. Meanwhile, Ω is the algebraic sum of the propeller speeds and Ω is defined as:

$$\Omega = -\Omega_1 + \Omega_2 - \Omega_3 + \Omega_4 \quad (2)$$

The relationship between the basic movements and the thrusts and torques generated by each propeller are written in (3), as:

$$\begin{aligned}
 U_1 &= b(\Omega_1^2 + \Omega_2^2 + \Omega_3^2 + \Omega_4^2) \\
 U_2 &= lb(-\Omega_2^2 + \Omega_4^2) \\
 U_3 &= lb(-\Omega_1^2 + \Omega_3^2) \\
 U_4 &= d(-\Omega_1^2 + \Omega_2^2 - \Omega_3^2 + \Omega_4^2)
 \end{aligned}
 \tag{3}$$

With U_1 the vertical thrust, U_2 the roll torque, U_3 the pitch torque, U_4 the yaw torque, Ω_n the propeller speed, b the thrust coefficient, d the drag coefficient and l is the distance between the center of quadcopter and the center of the propeller.

B. Experimental Data Acquisition

The developed quadcopter used in this experiment has a 60 cm span dimension with a 1.2 kg in weight. The quadcopter is operated by a human pilot through a Radio Control (RC) system and using an open source Flight Control Unit (FCU), an Ardupilot 2.5., as the main controller system. As the main controller system, the Ardupilot 2.5 consists of a microcontroller, a gyroscope, an accelerometer and a barometer as an Inertial Measurement Unit (IMU). Four T-Motor 940 KV-BLDC combined with T-Motor 18A Electronic speed controller (ESC) and 12"x5" propellers carbon placed at its four corners of the quadcopter are used as the actuator, and a Lippo battery with a voltage regulator are used for electric supply system.

The experimental flight data is recorded 4 times (Fig. 2), by saving the data in the on-board memory of the flight controller, where the three of them are used as the training dataset, and the other one is used as the test dataset. As can be seen in this figure, the first and second datasets represent the steady hovering state of the quadcopter while the third and fourth data sets represent the variation of rolling and pitching maneuver around the steady hovering point.


In this experiment, the training datasets consists of the second, third and the fourth data sets, while the first dataset is used to test the neural networks based controller system.

3. NEURAL NETWORK BASED DIRECT INVERSE CONTROL SYSTEM


A. Control Strategy Design

The quadcopter is an under-actuated system, because there are six state variables ($X, Y, Z, \phi, \theta, \psi$) of the quadcopter states should be controlled by only four input control signals, i.e., U_1, U_2, U_3, U_4 , respectively. As can be clearly seen from (1) and (3), the four input signal controls produced four outputs with only U_1 that contain the value for controlling the position x, y, z , with U_2, U_3, U_4 produce the attitude and orientation of the quadcopter. Therefore, control strategy for the under-actuated system


of the quadcopter is done by dividing the control system into two subsystems, as seen in Fig. 3. The inner loop control subsystem is then used for controlling the attitude movement, i.e., the roll, the pitch and the yaw, as the main part of the quadcopter control system. While the outer loop control subsystem is used for the controlling the lateral movement of the quadcopter position.

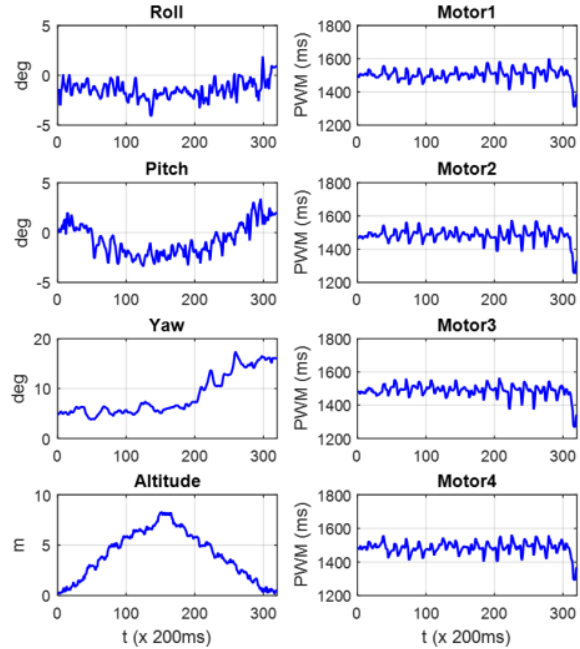


(a) Steady hovering data set as the test dataset.

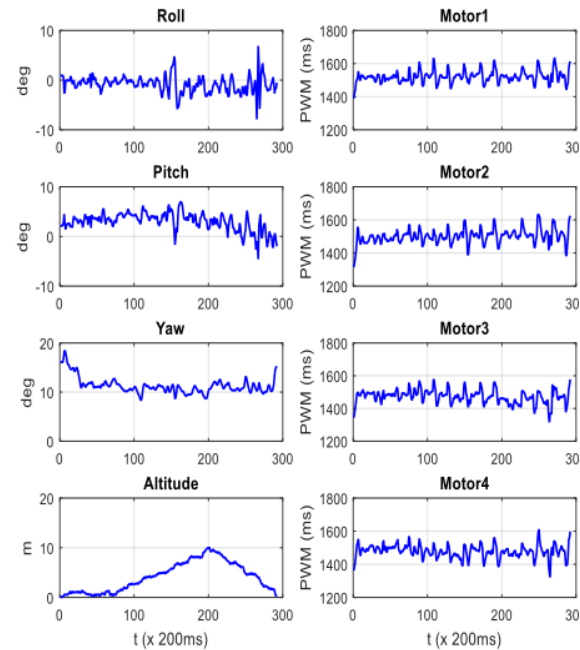

(b) Steady hovering data set as the training dataset.

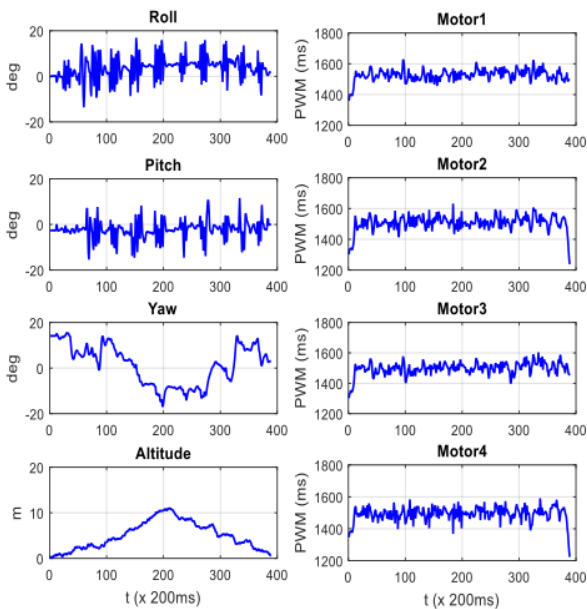

(c) Hovering state data set with variation of rolling and pitching as the training dataset.

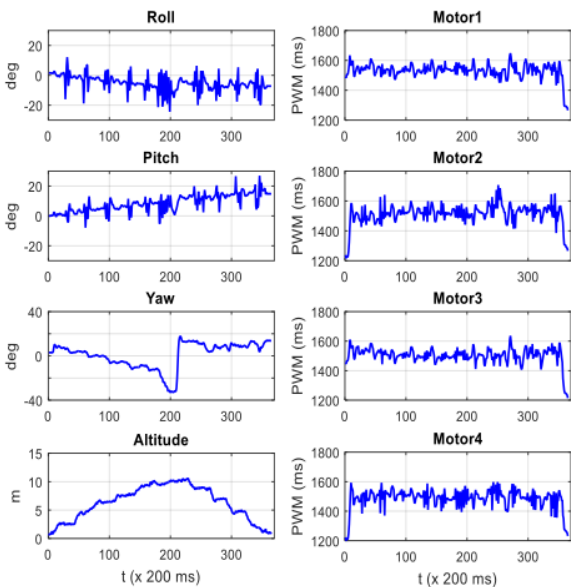

(d) Maneuver data set around the steady hovering as the training dataset.

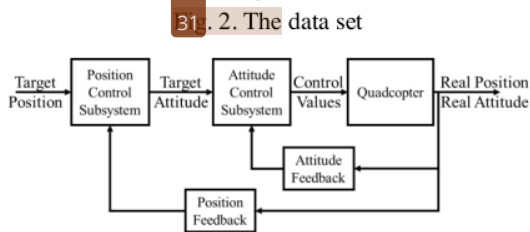


Fig. 3. Full control of quadcopter

B. Direct Inverse Control Strategy Design

Direct Inverse Control (DIC) is a simple strategy to implement and control nonlinear dynamics. The basic idea of Direct Inverse Control (DIC) scheme is to train a neural network as the inverse of the nonlinear system of the plant in order to nullify its dynamics characteristics. The neural networks based inverse system is then utilized as the controller of the system in a cascade structure as can be seen in Fig. 4.


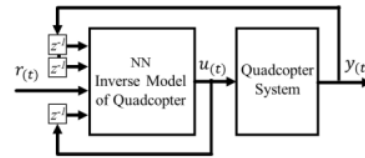


Fig. 4. Direct Inverse Control

DIC method is divided into two sections, namely (1) the system identification, and (2) an inverse model. Both of these two subsystems are trained using a back propagation learning method with an appropriate number of layers and neurons. The learning mechanism of the back propagation method is accomplished by using the system's real data to find the appropriate weights of the learning data set, and calculating the output neurons. The neural network's outputs are compared with the real target output of the training data, and the errors are used to update the neuron weights. This mechanism is done iteratively until a minimum error value is obtained.

The utilization of the DIC scheme in our quadcopter is conducted by firstly gathering the input-output data of the plant that comprise all of the operating range of the system. As can be seen from (1) and (2), the input-output dataset for our quadcopter are the input control signal $u(t)$ as the speed of rotation of each rotor, and the quadcopter flight dynamics $(X, Y, Z, \phi, \theta, \psi)$ as the output signal $y(t)$.

Training the neural networks for the system identification is conducted as shown in Figure 5a, while the architectural configuration for training the neural networks based inverse model is shown in Figure 5b. The neural networks based of the system identification consists of an input layer with 28 input neurons, a hidden layer with 30 neurons and an output layer with 4 output neurons. As same as neural networks based of the system identification, an architectural configuration of neural networks based inverse model has 28 input neurons, 30 hidden neurons and 4 output neurons.

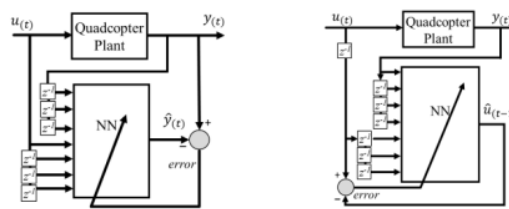

(a) Identification system (b) Inverse model

Fig. 5. Training configuration

4 EXPERIMENTAL RESULT

Training stage of the neural network based identification has been converged at 20000 epochs with a Mean Sum Square Error (MSSE) of 2.9706. Meanwhile, the neural network training for the inverse model converged at 6000 epochs with MSSE 2888.723. The weights obtained from the training are then used as the neural-network based DIC system (Fig. 4), and tested by using the testing dataset.

Figure 6 shows the comparison of the altitude condition of the quadcopter between the real test dataset and the simulation result, while Fig. 7 shows the attitude condition of the real dataset and the simulation result using a neural networks based inverse model, both using the NN based DIC scheme.

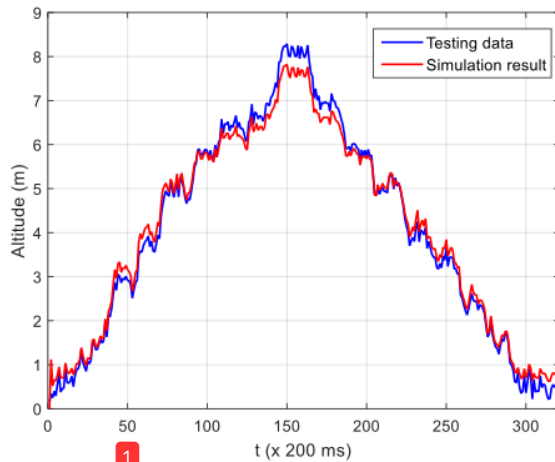


Fig. 6. Response result of altitude

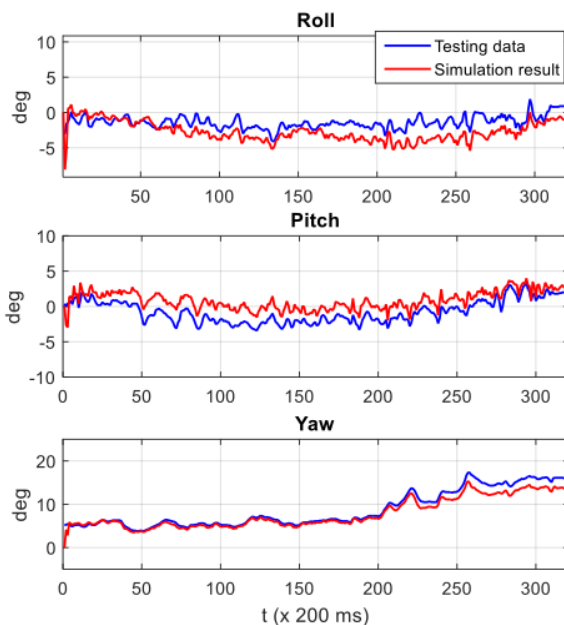


Fig. 7 Response result of attitude

As can be seen clearly in the Fig. 6, the simulation result shows that the quadcopter movement can followed the desired trajectory and maintained the hovering state with an altitude Mean Square Error (MSE) of 0.02842 meter. As also depicted in Fig 7, the MSSE of the attitude condition of the quadcopter along its course is 1.2486 degree. The low MSE and MSSE results show that the NN based DIC system has a good performance despite the existence of low errors of the altitude, and on the roll and the pitch parameters.

5 CONCLUSIONS

In this paper, we have proposed the utilization of backpropagation control system using Direct Inverse Control scheme for attitude and altitude control of a UAV quadcopter on hovering state. Real flight data experiments have proven that the proposed method can control both the attitude and altitude of the UAV with reasonable errors of 1.2486 degree and 0.02842 m, respectively. It is therefore shown that this method can also perform well in controlling the altitude of a UAV.

ACKNOWLEDGMENTS

The Authors would like to gratitude the Ministry of Research, Technology and Higher Education of Indonesia for supporting this works through Universitas Indonesia Research Grant.

REFERENCES

- [1] B. Herisse, F.-X. Russotto, T. Hamel, and R. Mahony, "Hovering flight and vertical landing control of a VTOL unmanned aerial vehicle using optical flow," in Intelligent Robots and Systems, 2008. IROS 2008. IEEE/RSJ International Conference on, 2008, pp. 801-806.
- [2] A. L. Salih, M. Moghavvemi, H. A. Mohamed, and K. S. Gaeid, "Modelling and PID controller design for a quadcopter unmanned air vehicle," in Automation Quality and Testing Robotics (AQTR), 2010 IEEE International Conference on, 2010, pp. 1-5.
- [3] C. Deng, S. Wang, Z. Huang, Z. Tan, and J. Liu, "Unmanned Aerial Vehicles for Power Line Inspection: A Cooperative Way in Platforms and Communications," Journal of Communications, vol. 9, 2014.
- [4] H. Duan, S. Shao, B. Su, and L. Zhang, "New development thoughts on the bio-inspired intelligence based control for unmanned combat aerial vehicle," Science China Technological Sciences, vol. 53, pp. 2025-2031, 2010.
- [5] C. Ononiwug, O. Onojo, and N. Chukwuchekwa, "Uav design for security monitoring," International Journal of Emerging Technology & Research.
- [6] K. Wong, "Survey of regional developments: Civil applications," in UAV Australia Conference, Melbourne, Australia, 2001, pp. 8-9.
- [7] G. Limnaios, "Current usage of unmanned aircraft systems (UAS) and future challenges: A mission oriented simulator for UAS as a tool for design and performance evaluation," J. Comput. Model, vol. 4, pp. 167-188, 2014.
- [8] A. Nagaty, S. Saeedi, C. Thibault, M. Seto, and H. Li, "Control and navigation framework for quadrotor helicopters," Journal of Intelligent & Robotic Systems, vol. 70, pp. 1-12, 2013.

- [9] T. Muhammad Hassan, S. Faiz, D. Hazry, A. Faizan, and J. Muhammad Kamran, "Stabilized controller design for attitude and altitude controlling of quad-rotor under disturbance and noisy conditions," 2013.
- [10] Y. Li and S. Song, "A survey of control algorithms for Quadrotor Unmanned Helicopter," in *Advanced Computational Intelligence (ICACI)*, 2012 IEEE Fifth International Conference on, 2012, pp. 365-369.
- [11] M. Y. Amir and V. uddin Abbas, "MODELING AND NEURAL CONTROL OF QUADROTOR HELICOPTER," *Yanbu Journal of Engineering and Science*, vol. 2, pp. 35-49, 2011.
- [12] W. Ping, C. Baohua, X. Wenchao, and D. Hui, "The Direct Inverse-Model Control Based on Neural Networks for Inverts," in *Measuring Technology and Mechatronics Automation (ICMTMA)*, 2010 International Conference on, 2010, pp. 855-858.
- [13] D. Xianglei, Z. Shuguang, H. Lvchang, and H. Rong, "The Neural Network Direct Inverse Control of Four-wheel Steering System," in *Measuring Technology and Mechatronics Automation (ICMTMA)*, 2011 Third International Conference on, 2011, pp. 865-869.
- [14] B. Kusumoputro, K. Priandana, and W. Wahab, "System Identification and Control of Pressure Process Rig® System Using Backpropagation Neural Networks," *ARPN Journal of Engineering and Applied Sciences*, vol. 10, pp. 7190-7195, 10th September 2015.
- [15] M. A. Heryanto, W. Wahab, and B. Kusumoputro, "Optimization of a neural network based direct inverse control for controlling a quadrotor unmanned aerial vehicle," *MATEC Web of Conferences*, vol. 34, p. 04003, 2015.
- [16] T. Bresciani, *Modelling, identification and control of a quadrotor helicopter*: Department of Automatic Control, Lund University, 2008.
- [17] T. Madani and A. Benallegue, "Backstepping control for a quadrotor helicopter," in *Intelligent Robots and Systems, 2006 IEEE/RSJ International Conference on*, 2006, pp. 3255-3260.
- [18] B. Erginer and E. Altug, "Modeling and PD control of a quadrotor VTOL vehicle," in *Intelligent Vehicles Symposium, 2007 IEEE*, 2007, pp. 894-899.
- [19] H. Fernando, A. De Silva, M. De Zoysa, K. Dilshan, and S. Munasinghe, "Modelling, simulation and implementation of a quadrotor UAV," 2014.
- [20] Z. Fang and W. Gao, "Adaptive integral backstepping control of a micro-quadrotor," in *Intelligent Control and Information Processing (ICICIP)*, 2011 2nd International Conference on, 2011, pp. 910-915.
- [21] H. Bouadi, S. S. Cunha, A. Drouin, and F. Mora-Camino, "Adaptive sliding mode control for quadrotor attitude stabilization and altitude tracking," in *Computational Intelligence and Informatics (CINTI)*, 2011 IEEE 12th International Symposium on, 2011, pp. 449-455.
- [22] L. Tan, L. Lu, and G. Jin, "Attitude stabilization control of a quadrotor helicopter using integral Backstepping," in *Automatic Control and Artificial Intelligence (ACAI 2012)*, International Conference on, 2012, pp. 573-577.

File ASL

ORIGINALITY REPORT

39%

SIMILARITY INDEX

PRIMARY SOURCES

- 1 **Bharindra Kamanditya, Benyamin Kusumoputro.** "Elman Recurrent Neural Networks Based Direct Inverse Control for Quadrotor Attitude and Altitude Control", 2020 International Conference on Intelligent Engineering and Management (ICIEM), 2020 217 words — 8%
Crossref
- 2 www.matec-conferences.org 102 words — 4%
Internet
- 3 www.researchgate.net 97 words — 4%
Internet
- 4 journal.utem.edu.my 95 words — 4%
Internet
- 5 www.scribd.com 43 words — 2%
Internet
- 6 **Bhakti Yudho Suprpto, M. Ary Heryanto, Herwin Suprijono, Benyamin Kusumoputro.** "Altitude Control of Heavy-Lift Hexacopter using Direct Inverse Control Based on Elman Recurrent Neural Network", Proceedings of the 8th International Conference on Computer Modeling and Simulation - ICCMS '17, 2017 36 words — 1%
Crossref
- 7 eprints.unsri.ac.id 36 words — 1%
Internet

35 words — 1%

8 Ju-Qian Zhang, Yu-Ru Shi, Yong Wu, Bang-Chun Wen. "Nonlinear Hybrid Controller Design for Perturbed Quadrotor Robot by Uncertainties", International Journal of Precision Engineering and Manufacturing, 2018
Crossref 23 words — 1%

9 hdl.handle.net
Internet 23 words — 1%

10 Bhakti Yudho Suprpto, Amsa Mustaqim, Wahidin Wahab, Benyamin Kusumoputro. "Modified elman recurrent neural network for attitude and altitude control of heavy-lift hexacopter", 2017 15th International Conference on Quality in Research (QiR) : International Symposium on Electrical and Computer Engineering, 2017
Crossref 19 words — 1%

11 eprints.whiterose.ac.uk
Internet 18 words — 1%

12 Hajrawati, H Nuraini, I I Arief, D Sajuthi. "The capability of Cemba (*Albizia lebbeckoides* [DC.]) benth leaf extract in inhibiting *Staphylococcus aureus*", IOP Conference Series: Earth and Environmental Science, 2020
Crossref 16 words — 1%

13 Karlisa Priandana, Wahidin Wahab, Benyamin Kusumoputro. "Comparison of Neural Networks Based Direct Inverse Control Systems for a Double Propeller Boat Model", Proceedings of the Fifth International Conference on Network, Communication and Computing - ICNCC '16, 2016
Crossref 15 words — 1%

14 cyberleninka.org
Internet

15 words — 1%

15 Michael T. Frye, Robert S. Provence. "Direct Inverse Control using an Artificial Neural Network for the Autonomous Hover of a Helicopter", 2014 IEEE International Conference on Systems, Man, and Cybernetics (SMC), 2014
14 words — 1%
Crossref

16 aspbs.com
Internet
13 words — 1%

17 arc.aiaa.org
Internet
12 words — < 1%

18 Soufiene Bouallegue, Khaled Ben Khoud. "Integral Backstepping Control Prototyping for a Quad Tilt Wing Unmanned Aerial Vehicle", International Review of Aerospace Engineering (IREASE), 2016
11 words — < 1%
Crossref

19 publisher.uthm.edu.my
Internet
11 words — < 1%

20 Karlisa Priandana, Benyamin Kusumoputro. "SOM-Based Direct Inverse Trajectory Control System for Double-Propeller Boat Maneuvers", IEEE Access, 2019
10 words — < 1%
Crossref

21 Mohammad Jafari, Hao Xu, Luis Rodolfo Garcia Carrillo. "A neurobiologically-inspired intelligent trajectory tracking control for unmanned aircraft systems with uncertain system dynamics and disturbance", Transactions of the Institute of Measurement and Control, 2018
10 words — < 1%
Crossref

22 Gao, Wei Nan, Jia Lu Fan, and Yan Nong Li. "Research on Neural Network PID Control Algorithm for a Quadrotor", Applied Mechanics and Materials, 2015. 9 words — < 1%
Crossref

23 International Journal of Intelligent Unmanned Systems, Volume 4, Issue 2 (2016) 9 words — < 1%
Publications

24 Kim, Jinho, Stephen A. Wilkerson, and S. Andrew Gadsden. "Comparison of gradient methods for gain tuning of a PD controller applied on a quadrotor system", Unmanned Systems Technology XVIII, 2016. 9 words — < 1%
Crossref

25 Manda, Suhas Priyatham. "Autonomous Landing of Quadrotor on a Moving UGV with the Optimal Control Policies.", The University of Texas at Arlington, 2021 9 words — < 1%
ProQuest

26 Siddharth Sridhar, Gaurang Gupta, Rumit Kumar, Manish Kumar, Kelly Cohen. "Tilt-Rotor Quadcopter Xplored: Hardware based Dynamics, Smart Sliding Mode Controller, Attitude Hold & Wind Disturbance Scenarios", 2019 American Control Conference (ACC), 2019 9 words — < 1%
Crossref

27 open.library.ubc.ca 9 words — < 1%
Internet

28 webthesis.biblio.polito.it 9 words — < 1%
Internet

29 www.ingentaconnect.com 9 words — < 1%
Internet

30 Manal S. Esmail, Mohamed H. Merzban, Ashraf A. M. Khalaf, Hesham F. Hamed, Aziza I. Hussein. "Attitude and Altitude Nonlinear Control Regulation of a Quadcopter Using Quaternion Representation", IEEE Access, 2022
8 words — < 1%
Crossref

31 Mohammed Abdallah Khodja, Mohamed Tadjine, Mohamed Seghir Boucherit, Moussa Benzaoui. "Experimental dynamics identification and control of a quadcopter", 2017 6th International Conference on Systems and Control (ICSC), 2017
8 words — < 1%
Crossref

32 S. Jamal Haddadi, P. Zarafshan, M. Dehghani. "A coaxial quadrotor flying robot: Design, analysis and control implementation", Aerospace Science and Technology, 2021
8 words — < 1%
Crossref

33 Young-Cheol Choi, Hyo-Sung Ahn. "Nonlinear Control of Quadrotor for Point Tracking: Actual Implementation and Experimental Tests", IEEE/ASME Transactions on Mechatronics, 2015
8 words — < 1%
Crossref

34 diva-portal.org
Internet
8 words — < 1%

35 link.springer.com
Internet
8 words — < 1%

36 mafiadoc.com
Internet
8 words — < 1%

37 Benyamin Kusumoputro, Herwin Suprijono, Muhammad Ary Heryanto, Bhakti Yudho Suprpto.
7 words — < 1%

"Development of an attitude control system of a heavy-lift hexacopter using Elman recurrent neural networks", 2016 22nd International Conference on Automation and Computing (ICAC), 2016

Crossref

38 M Ary Heryanto, Wahidin Wahab, Benyamin Kusumoputro. "Optimization of a neural network based direct inverse control for controlling a quadrotor unmanned aerial vehicle", MATEC Web of Conferences, 2015

7 words — < 1%

Crossref

39 Rodic, A., and G. Mester. "Modeling and simulation of quad-rotor dynamics and spatial navigation", 2011 IEEE 9th International Symposium on Intelligent Systems and Informatics, 2011.

7 words — < 1%

Crossref

40 Toshinobu Watanabe, Eric N. Johnson. "Trajectory Generation using Deep Neural Network", 2018 AIAA Information Systems-AIAA Infotech @ Aerospace, 2018

7 words — < 1%

Crossref

41 Bara J. Emran, Homayoun Najjaran. "A review of quadrotor: An underactuated mechanical system", Annual Reviews in Control, 2018

6 words — < 1%

Crossref

EXCLUDE QUOTES ON

EXCLUDE MATCHES OFF

EXCLUDE BIBLIOGRAPHY ON