

Jiteki S4

By Bhakti Suprpto

WORD COUNT

5414

TIME SUBMITTED

04-JUL-2022 05:26PM

PAPER ID

88000468

subsection detection, and select the quickly parallel thinning algorithm, gave high performance and accuracy. The HSV color space showed superiority in detecting straight or winding lanes. Other research performed by [11] detected the lane in urban street that had a complex system than highway roads using the HSV method. Meares et al. [12] used HSV images to detect the road lane based on the unsupervised and adaptive classifier. K.B. Kim et al. [13] proposed a method to detect road lane detection based on Random Sample Consensus (RANSAC) and HSV color transformation.

However, the previous studies have a limitation which only works on roads with lines. In visual navigation, it is important to not only consider the structured road but also unstructured ones which refer to a road with only a few roads marking so it is difficult to be segmented [14]. This research addresses this problem by performing the lane detection on the road without lane-markings. Thus, such lanes are similar to sidewalks or pavement so this may cause a problem to the autonomous vehicle to determine its lane. In this research, the HSV method is used to detect the road based on the video on the roads without lane-markings. Besides, this study addresses the safe distance area from the left and right sides of the vehicle. In this study, HSV also utilizes to detect other vehicles in the vicinity of the autonomous vehicle and its safe distance. This research is a preliminary study and the results will later be used by the autonomous vehicles to assign its movement on the road.

This paper is organized as follows. Section 2 presents the research method that will be performed in the study, including the HSV color space and data collection. The results and discussions are detailed in Section 3. Finally, Section 4 represents our conclusions.

2. RESEARCH METHOD

This research will design a road detection system based on HSV color space so the edge, the center, and lane border can be achieved. Furthermore, the HSV method is also utilized to detect vehicles. The data used in this study were collected from the road without lane-marking in some areas of Universitas Sriwijaya.

2.1. HSV Color Space

HSV color space is an alternative representation of the RGB color model, created by making a diagram based on how humans see colors. A color model is used to represent the color as a row of numbers. Color is a three-dimensional shape which is referred to as 'color space'. Different purposes may use different color spaces. Moreover, specific equipment may limit the type and size of color space. HSV color space which defines color in the terminology of Hue, Saturation, and Value provides the advantage since it uses the same color captured by the human whereas, some other color model, such RGB, is the result of mixing primary colors. The HSV color model can be seen in Figure 1.

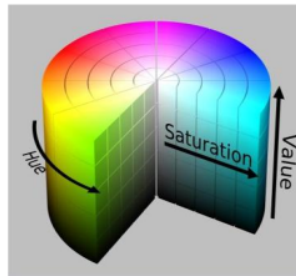


Fig. 1. HSV color space [15]

The range of HSV color space used in this research is shown in Figure 1. The color space is quantized from 0 to 255 when the image changes from RGB space to HSV space. The conversion formula for the HSV color space is [16]

$$R' = \frac{R}{255}; G' = \frac{G}{255}; B' = \frac{B}{255} \quad (1)$$

$$Cmax = \max(R', G', B') \quad (2)$$

$$Cmin = \min(R', G', B') \quad (3)$$

$$\Delta = Cmax - Cmin \quad (4)$$

Thus, the Hue calculation becomes:

$$H = \begin{cases} 0^\circ & \Delta = 0 \\ 60^\circ x \left(\frac{G' - B'}{\Delta} \bmod 6 \right) & , C_{max} = R' \\ 60^\circ x \left(\frac{B' - R'}{\Delta} + 2 \right) & , C_{max} = G' \\ 60^\circ x \left(\frac{R' - G'}{\Delta} + 4 \right) & , C_{max} = B' \end{cases} \quad (5)$$

The Saturation calculation:

$$S = \begin{cases} 0 & , C_{max} = 0 \\ \frac{\Delta}{C_{max}} & , C_{max} \neq 0 \end{cases} \quad (6)$$

And the Value calculation:

$$V = C_{max} \quad (7)$$

2.2. Region of Interest (ROI)

Region of Interest (ROI) is one of the segmentation techniques in image processing, aims to focus the image processing on a particular purposed area. ROI is processed before the image processing so the image processing is only carried out on the ROI frame, and not on the entire frame. Thus, ROI can be used to limit the observation area of a vehicle, and the ROI area cannot be made specifically because it is rather complex to adjust to other objects or other applications. Determination of ROI is helpful to minimize errors in road detection since unnecessary information may cause noise [17].

2.3. Haar-Like Feature

The Haar-like feature was first proposed by Viola P. and Jones M. to detect human faces. In subsequent research, the Haar-like feature method was re-updated by Lienhart R. and Maydt J. The Haar-like feature is a classifier trained using the data from some of the sample images of an object. That collection of images produces a collection of object features, called cascade. When working on objects recognition, cascade rejects certain image area which does not have objects that meet the criteria [18].

In a vehicle detection, the Haar-like Feature uses an XML file that stores data of vehicle types, such as cars and motorcycles. Those vehicle images are extracted into an XML file so it will be easy to be used in programming. This research used the XML file created from previous research.

46 Confusion Matrix

The confusion matrix is a method to calculate accuracy. There are four terms in measuring the confusion matrix performance, namely: True Positive, True Negative, False Positive, and False Negative. True Positive (TP) is the positive data detected with true value; True Negative (TN) is the total of negative data, detected with an incorrect value; False Positive (FP) is the negative data, however, it is detected as positive data; False Negative (FN) is the positive data, however, it is detected as negative data. TP, TN, FP, and FN as the results of the classification process, can be seen in Table 1.

9

Table 1. Confusion Metric

Class	Positively Classified	Negatively Classified
Positive	TP (True Positive)	FN (False Negative)
Negative	FP (False Positive)	TN (True Negative)

12 Based on the values of True Positive (TP), True Negative (TN), False Positive (FP), and False Negative (FN), the classification performance metrics can be obtained as can be seen in Table 2.

Table 2. Classification Performance Metric

Metric	Formula	Focus of Evaluation
Accuracy	$ACC = \frac{TP + TN}{TP + TN + FP + FN}$	Overall model effectiveness
Precision	$PRC = \frac{TP}{TP + FP}$	Model effectiveness in identifying positive values
Sensitivity	$SNS = \frac{TP}{TP + FN}$	Model effectiveness in identifying PV
Specificity	$SPS = \frac{TN}{TN + FP}$	Model effectiveness in identifying negative values

2.5. Measurement of Road Asphalt Area and Object Distance

The measurement of road area and object distance is used to maximize the driver's safety rate. First, in the road area measurement, the measured road area whose data is obtained, is the right-side and left-side road of the autonomous vehicle. This measurement is performed by calculating the pixel area and comparing the pixel area with the actual detected road asphalt area to determine the road safety rate, whether it is a safe or dangerous distance. While for the object distance measurement, the pixel area measurement of detected vehicles is used to find out the object distance; the closer, the bigger the detected pixel area, and the smaller the measured distance will be. The equation used in these two calculations measurement is:

$$\text{Distance or area} = x \pm \text{pixel area}, \quad (8)$$

where x is the value obtained after calculating the ratio between area in pixel and the actual area. Meanwhile, (9) is used to calculate the vehicle area detection accuracy and the object distance measurement:

$$\text{Accuracy} = \frac{\text{area/detected distance}}{\text{area/actual distance}} \times 100\% \quad (9)$$

2.6. Road Detection System

The road detection system proposed in this study can be seen in Figure 2. As shown in the figure, vehicle lane detection, i.e., asphalt uses video-based camera sensors as an input. The input will be processed if the frame meets the requirements for further processing. These videos will then be processed using HSV color space. The as 41 It road is the main image that must be separated from the background image based on different values of the HSV color space. If the processing using HSV color space is complete, then ROI is used to facilitate the work of the program in processing the area that we want to discover and use by limiting the working area. The next stage is to connect points or lines that have distance using the Hough Transform algorithm so the appearance of the detected area becomes neater. This method has been successful in detecting highways combined with HSV [19]. The program will be done if the frontal road lane detects as asphalt. Meanwhile, safe/unsafe area measurement of the right/left camera is performed after the road area is detected using pixel calculation which will be used as the input for processing the safe or unsafe vehicle position. If the entire process has been run, the program is complete.

The road data were taken from a video of the road around Universitas Sriwijaya. The data duration was between 60 to 90 seconds with a pixel size of 1920 × 2560 pixels for the right and left cameras, and 1080 × 1920 pixels for the front camera.

2.7. Object Detection System

Video-based camera sensor as input is used in object detection. The input will be processed if the frame meets the requirements for further processing. Videos that have met the criteria are first converted into gray images before performing the Haar-Like Cascade objects detection. In the Haar-Like Cascade method, object recognition is done by extracting the object that we want to recognize into the XML file; if it is recognized, a bounding box will be given to the object. In this research, XML files [20] were used. Videos were used not only to detect objects but also to detect vehicle distances. In this research, vehicle distance was done by utilizing the function of HSV color space that is used to determine the pixel 416 used as input in measuring object distances. Calibration must be done before measuring object distance by comparing the detected pixel value with the actual distance value.

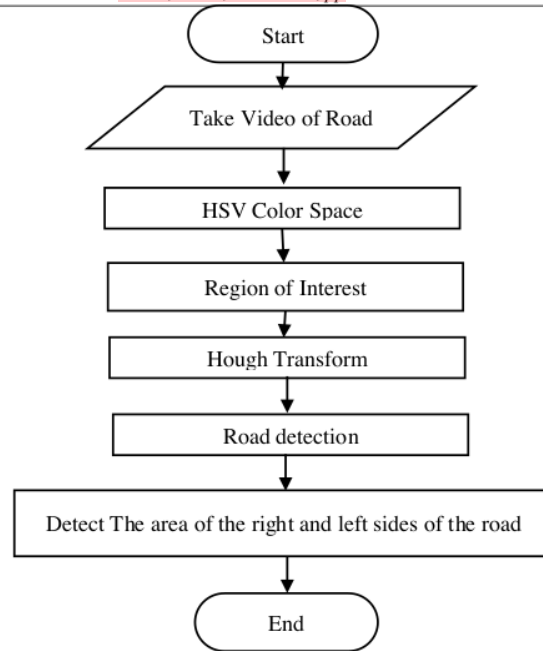


Fig. 2. Road detection flowchart

2.8. Data Collecting

In this research, the data used were the secondary and primary data. The secondary data were some images of vehicles that might be recognized as objects, i.e., motorcycles and cars. While the primary data were road data from the predetermined area as shown in Figure 3.



Fig. 3. The coverage area for the data collection

The video data were extracted into frames in * JPG format and would be used as samples in image processing to detect roads, cars, motorcycles, and other vehicles around electric vehicles. After obtaining the data, three videos with the best lighting conditions were taken out. In addition, vehicle distance data were retrieved to calculate the accuracy and to discover the trajectory length that will be used as the research area. The image and video extractions can be seen in Figure 4. In the initial process of road and object detection around the electric vehicle, the frame must first be processed to produce the test data so it can run commands to detect the road and object in the video.



Fig. 4. Video extraction (a) As a road picture (b) As an image containing a vehicle (c) Road measurement and vehicle distance accuracy

3. RESULTS AND DISCUSSION

The data taken were in a video format of the streets within the campus area of Universitas Sriwijaya. The data were firstly extracted into images to get sample test images. The road data obtained from sample test images were then used as information in the video data processing. The process of road detection, i.e., asphalt was performed in the following steps: changing the color of the image into HSV color space, using masking images to separate the road color with the colors of other objects, limiting the working area using ROI, and adding Hough Transform to spruce up the detected road shape. Meanwhile, the safe area detection on the right or left side of the road, and the object distance measurement were performed by using the pixel area information. In summary, the whole process can be seen in Figure 5.

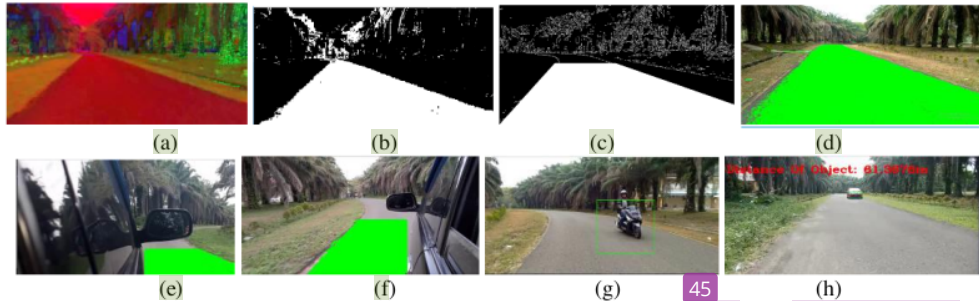






Fig. 5. The process of recognizing asphalt, detection of safe/unsafe area on the road right and left sides, object detection, and object distance detection; (a) HSV color space, (b) mask image, (c) ROI, (d) detected road, (e) safe area on the road right side, (f) safe area on the road left side, (g) detected vehicles, (h) Measured object distance.

The HSV color space is used in road detection process. The detection results using HSV color space compared to the ground truth (GT) can be seen in Table 3.











Table 3. Accuracy of Front Side Detection

No	GT	HSV	Accuracy
1			86.5154 %
2			93.9803 %
3			93.5491 %

No	GT	HSV	Accuracy
4			94.5989 %
5			93.5656 %





The average accuracy of road detection by the front camera is 92,44%. This result indicates that the HSV color space is good enough to detect the road without lane-marking. However, HSV color space still has disturbances in road recognition caused by lighting and similarities of the road color with nearby objects (for example, between asphalt and cement) 39. The results of road detection from the right side of the road with HSV color space and its ground truth can be seen in Table 4.







Table 4. Accuracy of Right Side Detection

No	GT	HSV	Accuracy
1			70.8469 %
2			61.0689 %
3			58.7821 %
4			89.7016 %
5			63.5172 %

The average accuracy obtained by the right camera to detect the road is 68,78%. The road detection results of the left side of the road asphalt with HSV color space is shown in Table 5.

Table 5. Accuracy of Left Side Detection

No	GT	HSV	Accuracy
1			73.3617 %
2			79.1008 %

No	GT	HSV	Accuracy
3			66.8736 %
4			82.2749 %
5			77.5374 %

The average accuracy obtained on-road detection by the left camera is 75.83%. This accuracy is better than road detection from the right side. The results from the front, right and left camera showed that the HSV color space is quite good to detect the road without lane-marking with an average accuracy of 79,02%. In spite of these good results, HSV color space may still have errors caused by little color differences between two objects (for example, asphalt with cement) which makes both objects detected in the same HSV value. Besides, the lack of lighting may cause difficulty to recognize HSV objects, either in the form of shading or dark (evening or night).

The car used has a 2-meter width, and the road width is 4.8 meters (manual road measurement). With such road width, the car has taken almost half of the road area, the 5 m² other 2.8 meters is the area used as the safe/unsafe indicator of the autonomous vehicle position; whereas 60 cm is 5 m² minimum distance taken as the safe distance of the left side of the vehicle from the road, and 100 cm is the minimum distance taken as the safe distance of the left side of the vehicle. Through these data, the read pixel area from the right side distance and the road left side were compared to the actual distance measured by meter gauge to find linear equations, and the results of the road right side show the safe area if the read pixel area is more than 250,000 (1 m² area) and the road left side shows the safe area if the read pixel area is more than 200,000 (0.6 m² area). Table 6 and Table 7 show the results from some samples images of the safe/unsafe area detection of the road right side and left side, respectively.

Table 6. Safe/Unsafe Area of the Road Right Side











No	Result	Safe/Unsafe Area	Pixel Area Detected (Pixel)	Actual Area (m ²)
1		Safe	301.767	1.2 m ²
2		Safe	289.890	1.1 m ²
3		Unsafe	87.980	0.3 m ²
4		Safe	298.990	1.15 m ²
5		Unsafe	130.987	0.5 m ²

Table 7. Safe/Unsafe Area of the Road Left Side

No	Result	Safe/Unsafe Area	Pixel Area Detected	Actual Area
1		Safe	128.987	0.65 m ²
2		Unsafe	119.098	0.5 m ²
3		Safe	145.786	0.7 m ²
4		Safe	159.345	0.75 m ²
5		Safe	191.654	0.9 m ²

The road area detection process results in an accuracy of 80% where 48 images of safe/unsafe areas were successfully measured correctly from the 60 images taken, and the rest 12 images were measured incorrectly. The error of measuring the safe/unsafe areas of 12 images was led by the unstable position of the camera caused by changes in the area of the asphalt measurement area, which made the standard of initial measurement not working properly. In addition, this error might be caused by the movement of the car when it took a turn nevertheless the measurement error caused by it did not take effect since it only occurred for a few seconds. The results for object detection, i.e., vehicles in the front of the autonomous vehicles can be seen in Table 8.






Table 8. Object Detection Accuracy

No	Result	Detected/ Not detected
1		Detected
2		Detected
3		Not Detected
4		Detected
5		Detected

In objection detection, 34 images were detected successfully from 40 images, while 6 other images were unsuccessfully detected so the average accuracy of object detection was 85%. Errors that occurred in object detection were led by some causes. It might be caused by the color of the vehicle, wherein this research, one of the vehicles used as a ³² object to be detected had a green color that resembled the color of the video background, thus, a closer distance between the camera and the object is required for the object to be detected. Besides, the lack of vehicle data type extracted from the XML feature file obtained from previous research may cause the error in object detection.

The results of object distance measurement in front of autonomous vehicles ³⁷ can be seen in Table 9. The accuracy was obtained by comparing the actual area with the area read by the program. The results of object distance measurement obtained a good value of 74.76%. In this study, the object distance measurement had only been applied to the minibus, using a linear equation formula that utilized information from the pixel area. The results were good enough since objects would be directly detected from their recognized color. Nevertheless, this measurement method has a weakness in the range of objects because vehicles (with a distance of fewer than 5 meters) might suffer a detection failure due to a set ROI limit, and measurements were interrupted due to vehicle colors modified.

Table 9. Object Distance Measurement Accuracy

No	Result	Measured Distance on the program	Actual Measurement	Accuracy
1		61.682 m	60 m	97.27%
2		56.381 m	55 m	97.58%
3		50.130 m	45 m	89,76%
4		39.239 m	35 m	89.21%
5		3.348 m	3 m	error

4. CONCLUSION

This study showed that HSV color space can give a good performance in detecting the road without lane-markings. The test results showed that the road asphalt was detected by HSV color space with an average accuracy of 79,02%. The process of detecting roads without lane-markings in the area of Universitas Sriwijaya using HSV color space is successful even though HSV color space still has disturbances. Besides, the area measurement that showed the safe/unsafe of the road right and left sides was detected well using HSV color space with an accuracy of 80%. This is sufficient in helping the navigation process by knowing the vehicle position if it is too far to the left or right. As for the object introduction using the XML file, 80% accuracy was obtained and worked quite well. The object recognition of vehicles can be improved by multiplying the vehicle data in the XML file format. Lastly, the object distance measurement by utilizing the pixel wide data gave an accuracy of 74.76% which will be useful for the autonomous vehicle to measure its distance to other objects. In the future, we will apply and perform a trial of this HSV color space method in the prototype of autonomous vehicles.

REFERENCES

- [1] J. Baili *et al.*, "Lane departure detection using image processing techniques," in *2017 2nd International Conference on Anti-Cyber Crimes (ICACC)*, 2017, pp. 238–241. DOI: [10.1109/Anti-Cybercrime.2017.7905298](https://doi.org/10.1109/Anti-Cybercrime.2017.7905298)
- [2] P. Bhope and P. Samant, "Use of Image Processing in Lane Departure Warning System," in *2018 3rd International Conference for Convergence in Technology (I2CT)*, 2018, pp. 1–4. DOI: [10.1109/I2CT.2018.8529819](https://doi.org/10.1109/I2CT.2018.8529819)
- [3] J. He, H. Rong, J. Gong, and W. Huang, "A lane detection method for lane departure warning system," in *2010 International Conference on Optoelectronics and Image Processing*, 2010, vol. 1, pp. 28–31. DOI: [10.1109/ICOIP.2010.307](https://doi.org/10.1109/ICOIP.2010.307)
- [4] S.-H. Jang, D.-J. Yoon, J.-H. Kim, and B.-W. Kim, "Research of object classification algorithm based on LIDAR for UGV," in *2011 11th International conference on control, automation and systems*, 2011, pp. 746–749. [Online](#)
- [5] Z. Dong, W. Li, and Y. Zhou, "An autonomous navigation scheme for UAV in approach phase," in *2016 IEEE Chinese Guidance, Navigation and Control Conference (CGNCC)*, 2016, pp. 982–987. DOI: [10.1109/CGNCC.2016.7828919](https://doi.org/10.1109/CGNCC.2016.7828919)
- [6] V. Bobkov, S. Melman, A. Kudrashov, and A. Scherbatyuk, "Vision-based navigation method for a local maneuvering of the autonomous underwater vehicle," in *2017 IEEE Underwater Technology (UT)*, 2017, pp. 1–5. DOI: [10.1109/UT.2017.7890304](https://doi.org/10.1109/UT.2017.7890304)
- [7] N. M. Ali, N. Khair, A. Rashid, and Y. M. Mustafah, "Performance comparison between RGB and HSV color segmentations for road signs detection," *Applied Mechanics and Materials*, vol. 393, no. 1, pp. 550-555, 2014. DOI: [10.4028/www.scientific.net/AMM.393.550](https://doi.org/10.4028/www.scientific.net/AMM.393.550)
- [8] H. S. V. C. Space and I. Automatica, "Road signs recognition using a dynamic pixel aggregation technique in the HSV color space," in *Proceeding 11th International Conference on Image Analysis and Processing*, pp. 572-577, 2001. DOI: [10.1109/ICIAP.2001.957071](https://doi.org/10.1109/ICIAP.2001.957071)
- [9] X. Hu and C. He, "Moving object detection algorithm based on Gaussian Mixture Model and HSV space," *Current Journal of Applied Science and Technology*, vol. 14, no. 6, pp. 1–8, 2016. DOI: [10.9734/BJAST/2016/24249](https://doi.org/10.9734/BJAST/2016/24249)
- [10] X. Shi, B. Kong, and F. Zheng, "A new lane detection method based on feature pattern," in *2009 2nd International Congress on Image and Signal Processing*, 2009, pp. 1–5. DOI: [10.1109/CISP.2009.5304294](https://doi.org/10.1109/CISP.2009.5304294)
- [11] G. Zhi-feng, W. Bo, D. Ming-jie, and S. Yong-sheng, "Intelligent real-time lane detection for vehicles in urban streets," 2012. DOI: [10.1049/cp.2012.2277](https://doi.org/10.1049/cp.2012.2277)
- [12] A. F. Cela, L. M. Bergasa, F. L. Sanchez, and M. A. Herrera, "Lanes detection based on unsupervised and adaptive classifier," in *2013 Fifth International Conference on Computational Intelligence, Communication Systems and Networks*, 2013, pp. 228–233. DOI: [10.1109/CICSYN.2013.40](https://doi.org/10.1109/CICSYN.2013.40)
- [13] K. B. Kim and D. H. Song, "Real time road lane detection with RANSAC and HSV Color transformation," *Journal of Information and Communication Convergence Engineering*, vol. 15, no. 3, pp. 187–192, 2017. DOI: [10.6109/jicce.2017.15.3.187](https://doi.org/10.6109/jicce.2017.15.3.187)
- [14] J. Huang, B. Kong, B. Li, and F. Zheng, "A new method of unstructured road detection based on HSV color space and road features," in *2007 International Conference on Information Acquisition*, pp. 596–601, 2007. DOI: [10.1109/ICIA.2007.4295802](https://doi.org/10.1109/ICIA.2007.4295802)
- [15] E. Reinhard and T. Pouli, "Colour Spaces for Colour Transfer. In: Schettini R., Tominaga S., Trémeau A. (eds) Computational Color Imaging," CCIW 2011. Lecture Notes in Computer Science, vol 6626. Springer, Berlin, Heidelberg, 2011. DOI: [10.1007/978-3-642-20404-3_1](https://doi.org/10.1007/978-3-642-20404-3_1)
- [16] S. N. Endah, R. Kusumaningrum, and H. A. Wibawa, "Color space to detect skin image: the procedure and omplication," *Sci. J. Informatics*, vol. 4, no. 2, pp. 143–149, 2017. DOI: [10.15294/sji.v4i2.12013](https://doi.org/10.15294/sji.v4i2.12013)
- [17] D. Ding, C. Lee, and K. Lee, "An adaptive road ROI determination algorithm for lane detection," *2013 IEEE Int. Conf. IEEE Reg. 10 (TENCON 2013)*, pp. 1–4, 2013. DOI: [10.1109/TENCON.2013.6718807](https://doi.org/10.1109/TENCON.2013.6718807)
- [18] R. Lienhart and J. Maydt, "An extended set of Haar-like features for rapid object detection," in *Proceeding International Conference on Image Processing*, pp. 0–3, 2002. DOI: [10.1109/ICIP.2002.1038171](https://doi.org/10.1109/ICIP.2002.1038171)
- [19] P. A. Rosyady and R. Sumiharto, "Highway Visual Tracking System using Thresholding and Hough Transform," *J. Ilmu Tek. Elektro Komput. dan Inform.*, vol. 4, no. 2, p. 93, 2018. DOI: [10.26555/jiteki.v4i2.12016](https://doi.org/10.26555/jiteki.v4i2.12016)
- [20] S. Choudhury, S. P. Chattopadhyay, and T. K. Hazra, "Vehicle detection and counting using haar feature-based classifier," in *2017 8th Annual Industrial Automation and Electromechanical Engineering Conference (IEMECON)*, pp. 106–109, 2017. DOI: [10.1109/IEMECON.2017.8079571](https://doi.org/10.1109/IEMECON.2017.8079571)

BIOGRAPHY OF AUTHORS

3 **Aulia Ghaida** was born on May 22th, 1998 in Ogan Komering Ilir (South Sumatra, Indonesia). She is a graduate of Sriwijaya University of Palembang in major of electrical engineering this year. During her undergraduate at Sriwijaya University, she was a member of computer and robotic laboratory. Her undergraduate thesis focuses on image processing. She concerns to learn more about robotics and programming.

10 **Hera Hikmarika** was born on December 7th, 1978 in Palembang (South Sumatra, Indonesia). She is a graduate of Srwijaya University of Palembang in major of electrical engineering. Her master program is in Electrical Engineering of Universitas Gadjah Mada (UGM). She is an academic staff of Electrical Engineering of Sriwijaya University of Palembang as a lecturer. She concerns in major of control and intelligent system.

11 **Suci Dwijayanti** received the M.S. degree in electrical and computer engineering from Oklaho **20** State University, Stillwater, OK, USA in 2013. Then, in 2018, she recieved her Doctoral degree from the Graduate School of Natural Science and Technology, Kanazawa University, Japan. Her research interests focus on signal processing and machine learni **27** She was previously an engineer with ConocoPhillips Indonesia Inc Ltd from 2007 to 2008. Since 2008, she has been with the department of Electrical Engineering at Sriwijaya University, Indonesia. She is a member of IEEE.

3 **Bhakti Yudho Suprpto** was born on February 11th, 1975 in Palembang (South Sumatra, Indonesia). He is a graduate of Srwijaya University of Palembang in major of electrical engineering. His post graduate and doctoral program is in Electrical Engineering of Universitas Indonesia (UI). He is an academic staff of Electrical Engineering of Sriwijaya University of Palembang as a lecture. He concerns in major of control and intelligent system

24%

SIMILARITY INDEX

PRIMARY SOURCES

- 1** www.researchgate.net 274 words — 6%
Internet
- 2** garuda.ristekbrin.go.id 202 words — 4%
Internet
- 3** Erliza Yuniarti, Siti Nurmaini, Bhakti Yudho Suprpto. "Indonesian load prediction estimation using long short term memory", IAES International Journal of Artificial Intelligence (IJ-AI), 2022 98 words — 2%
Crossref
- 4** Jung-Hwan Kim, Sun-Kyu Kim, Sang-Hyuk Lee, Tae-Min Lee, Joonhong Lim. "Lane recognition algorithm using lane shape and color features for vehicle black box", 2018 International Conference on Electronics, Information, and Communication (ICEIC), 2018 42 words — 1%
Crossref
- 5** Bicho, Estela. "Dynamic approach to behavior-based robotics: Design, specification, analysis, simulation and implementation.", Universidade do Minho (Portugal), 2017 24 words — 1%
ProQuest
- 6** iaiai.org 24 words — 1%
Internet

-
- 7 Siti Rochimah Hasibuan, Risanuri Hidayat, Agus Bejo. "Speaker Recognition Using Mel Frequency Cepstral Coefficient and Self-Organising Fuzzy Logic", 2020 3rd International Seminar on Research of Information Technology and Intelligent Systems (ISRITI), 2020
Crossref 21 words — < 1%
-
- 8 Arifan Rahman, Wahyu Catur Wibowo. "Deep Neural Network for Speaker Identification Using Static and Dynamic Prosodic Feature for Spontaneous and Dictated Data", 2021 International Conference on Advanced Computer Science and Information Systems (ICACSIS), 2021
Crossref 20 words — < 1%
-
- 9 I Made Wirawan, Triyanna Widiyaningtyas, Nurwakiah B. Siti. "Nutritional Status of Infants Classification by Calculating Anthropometry Through C4.5 Algorithm", 2019 International Conference on Electrical, Electronics and Information Engineering (ICEEIE), 2019
Crossref 20 words — < 1%
-
- 10 section.iaesonline.com
Internet 20 words — < 1%
-
- 11 ara.cse.unr.edu
Internet 17 words — < 1%
-
- 12 thesai.org
Internet 16 words — < 1%
-
- 13 www.slideshare.net
Internet 16 words — < 1%
-
- 14 Fraol Gelana Waldamichael, Taye Girma Debelee, Yehualashet Megersa Ayano. "Coffee disease detection using a robust HSV color - based segmentation and

transfer learning for use on smartphones", International Journal of Intelligent Systems, 2021

Crossref

-
- 15 www.scilit.net
Internet 15 words — < 1%
-
- 16 [Lecture Notes in Computer Science, 2005.](#)
Crossref 14 words — < 1%
-
- 17 [Weiwei Qi, Wei Wang, Bin Shen, Jiabin Wu. "A Modified Post Encroachment Time Model of Urban Road Merging Area Based on Lane-Change Characteristics", IEEE Access, 2020](#)
Crossref 14 words — < 1%
-
- 18 sersc.org
Internet 13 words — < 1%
-
- 19 ["Computer Vision – ACCV 2018", Springer Science and Business Media LLC, 2019](#)
Crossref 12 words — < 1%
-
- 20 export.arxiv.org
Internet 12 words — < 1%
-
- 21 pure.bond.edu.au
Internet 12 words — < 1%
-
- 22 www.hindawi.com
Internet 12 words — < 1%
-
- 23 [Markus Hermawan, Zaenal Husin, Hera Hikmarika, Suci Dwijayanti, Bhakti Yudho Suprpto. "Road Identification using Convolutional Neural Network on Autonomous Electric Vehicle", 2021 8th](#) 11 words — < 1%

24 Mochamad Idris, Mustafid, Jatmiko Endro Suseno. "Implementation of C4.5 Algorithm and Forward Chaining Method for Higher Education Performance Analysis", E3S Web of Conferences, 2019 10 words — < 1%

Crossref

25 pdfs.semanticscholar.org 10 words — < 1%

Internet

26 Harold Japok Anak Undit, Mohd Fadzil Abu Hassan, Zalhan Mohd Zin. "Vision-Based Unmarked Road Detection with Semantic Segmentation using Mask R-CNN for Lane Departure Warning System", 2021 4th International Symposium on Agents, Multi-Agent Systems and Robotics (ISAMSR), 2021 9 words — < 1%

Crossref

27 arxiv.org 9 words — < 1%

Internet

28 oatao.univ-toulouse.fr 9 words — < 1%

Internet

29 www.innspub.net 9 words — < 1%

Internet

30 A K Scheel. "First clinical evaluation of sagittal laser optical tomography for detection of synovitis in arthritic finger joints", Annals of the Rheumatic Diseases, 2005 8 words — < 1%

Crossref

31 Fenglei Xu, Bingwen Hu, Lineng Chen, Huan Wang, Qingyuan Xia, Paramjit Sehdev, Mingwu Ren. "An 8 words — < 1%

illumination robust road detection method based on color names and geometric information", Cognitive Systems Research, 2018

Crossref

32 Lecture Notes in Computer Science, 2013. 8 words — < 1%

Crossref

33 Niel Ananto, Ani Budi Astuti, Achmad Efendi. "Ensemble Analysis of the Students Length of Study at University of Klabat Manado Indonesia", Journal of Physics: Conference Series, 2021 8 words — < 1%

Crossref

34 Shitao Chen, Songyi Zhang, Jinghao Shang, Badong Chen, Nanning Zheng. "Brain-Inspired Cognitive Model With Attention for Self-Driving Cars", IEEE Transactions on Cognitive and Developmental Systems, 2019 8 words — < 1%

Crossref

35 Wang, F.. "Fuzzy-based algorithm for color recognition of license plates", Pattern Recognition Letters, 20080501 8 words — < 1%

Crossref

36 acikerisim.kirklareli.edu.tr 8 words — < 1%

Internet

37 ebin.pub 8 words — < 1%

Internet

38 jurnal.iaii.or.id 8 words — < 1%

Internet

39 link.springer.com 8 words — < 1%

Internet

- 40 Internet 8 words — < 1%
-
- 41 www.spiedigitallibrary.org Internet 8 words — < 1%
-
- 42 "Image and Graphics", Springer Science and Business Media LLC, 2021 Crossref 7 words — < 1%
-
- 43 Nisa Hanum Harani, Anggi Sholihatus Sadiah, Anny Nurbasari. "Smart Fish Feeder Using Arduino Uno With Fuzzy Logic Controller", 2019 5th International Conference on Computing Engineering and Design (ICCED), 2019 Crossref 7 words — < 1%
-
- 44 "Proceedings of International Ethical Hacking Conference 2018", Springer Science and Business Media LLC, 2019 Crossref 6 words — < 1%
-
- 45 Meng-Rong Lee, Daw-Tung Lin. "Vehicle counting based on a stereo vision depth maps for parking management", Multimedia Tools and Applications, 2018 Crossref 6 words — < 1%
-
- 46 R. Jane Preetha Princy, Saravanan Parthasarathy, P. Subha Hency Jose, Arun Raj Lakshminarayanan, Selvaprabu Jeganathan. "Prediction of Cardiac Disease using Supervised Machine Learning Algorithms", 2020 4th International Conference on Intelligent Computing and Control Systems (ICICCS), 2020 Crossref 6 words — < 1%

EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES

OFF