

ISSN: 2088-5334

Vol 8, No 6 (2018)

International Journal on Advanced Science Engineering Information Technology

Available online at
<http://ijaseit.insightsociety.org>

Advanced Science Image processing Image retrieval microprocessor
Back Projection fuzzy Engineering alumina Gait analysis Biometric
Mobile Agent Interpolation Soft Tissue hydrothermal stability Outlier filter
Sampling Theorem Magnetic field porous structure acidity Wireless
Parsimony Database Server Robot Operation Image extraction
Graphical User Interface Virus Compensate Networks Life Cycle Cost
Current shaping Phylogenetic Analysis Compressive Strength Energy Optimization
Metamorphic Virus neural network Predictive Tools Energy Image matching
parallel port Obfuscation Techniques Admixure Router Regression Analysis
Power factor catalyst Construction Delay Support Vector Machine Surveillance
Boost regulator breast phantom Effects of Delay Current harmonics soybean



International Journal on Advanced Science Engineering Information Technology

HOME ARCHIVES

Vol. 8 (2018) No. 6

Articles

An Evaluation of The Mobile Apps for Children with Special Education Needs Based on The Utility Function Metrics

Radoslava Kraveva, Velin Kravev

pages: 2269-2277 [Full text](#) DOI:10.18517/ijaseit.8.6.6309

Statistical Characterization of Indian Residential Networks for Powerline Communication

Shashidhar Kasthala, GKD Prasanna Venkatesan, A Amudha

pages: 2278-2285 [Full text](#) DOI:10.18517/ijaseit.8.6.2481

The Effect of Organizational Commitment and E-training on E-tourism Job Performance

Leila Moradi, Ibrahim Mohamed, Yazrina Yahya

pages: 2286-2293 [Full text](#) DOI:10.18517/ijaseit.8.6.6665

A Conceptual Framework for Metrics Selection: SMes

Zubaidah Bukhari, Jamaiah Yahaya, Aziz Deraman

pages: 2294-2300 [Full text](#) DOI:10.18517/ijaseit.8.6.6441

Classification of Plasmodium Malariae dan Plasmodium Ovale in Microscopic Thin Blood Smear Digital Images

Hanung Adi Nugroho, Aulia Darajatun, Igi Ardiyanto, Ratna L.B Buana

pages: 2301-2307 [Full text](#) DOI:10.18517/ijaseit.8.6.6514

Integrated Gas – Electricity Network - Combined Heat and Power Optimization with Associated Petroleum and Wet Gas Utilization Constraint

Priambudi Pujiatma, Sasongko Pramono Hadi, Sarjiya Sarjiya, Tri Agung Rohmat

pages: 2308-2314 [Full text](#) DOI:10.18517/ijaseit.8.6.6519

An Empirical Study of Scrumban Formation based on the Selection of Scrum and Kanban Practices

Mashal Alqudah, Rozilawati Razali

pages: 2315-2322 [Full text](#) DOI:10.18517/ijaseit.8.6.6566

Trust Model Based On Islamic Business Ethics and Social Network Analysis

Nor Faradila Kolan, Norleyza Jailani, Marini Abu Bakar, Rodziah Latih

pages: 2323-2331 [Full text](#) DOI:10.18517/ijaseit.8.6.6412

A Proposed Model for Virtual Fitting Room Based on Usability and Profound Emotional Elements

Syazwan Noordin, Noraidah Sahari @ Ashaari, Tengku Siti Meriam Tengku Wook

pages: 2332-2340 [Full text](#) DOI:10.18517/ijaseit.8.6.6440

Identification of Pig Adulterant in Mixture of Fat Samples and Selected Foods based on FTIR-PCA Wavelength Biomarker Profile

Irwan Saputra, Irwandi Jaswir, Rini Akmeliawati

pages: 2341-2348 [Full text](#) DOI:10.18517/ijaseit.8.6.7689

Changes in Microbial Community as Affected by Soil Compaction and Organic Matter Amendment

Lily Ishak, Philip H. Brown

pages: 2349-2354 [Full text](#) DOI:10.18517/ijaseit.8.6.7609

Analysis of Gelatin Adulteration in Edible Bird's Nest using Fourier Transform Infrared (FTIR) Spectroscopy

IJASEIT

About

Editorial Board

Guide for Authors

Journal Contact

Online Submission

Publication Ethics

Browse Authors

NEW Update : IJASEIT in Scopus

NEW Update : IJASEIT in Scimago JR

Scimago Journal Rank



Scopus CiteScore

1.31 2017
CiteScore

Powered by Scopus

Nurul H. Jamalludin, Nur A. Tukiran

pages: 2355-2359 [Full text](#) DOI:10.18517/ijaseit.8.6.7690

Non-Destructive Testing by Ultrasonic and Thermal Techniques of an Impacted Composite Material

Fatima Khathyri, Bachir Elkihel, Fabienne Delaunois

pages: 2360-2366 [Full text](#) DOI:10.18517/ijaseit.8.6.5230

Antibacterial Inactivation of Escherichia coli after TiO₂-Fe₃O₄-Bentonite Photocatalytic Treatment

Restu Kartiko Widi, Emma Savitri, Olivia Angelina, Sherilly Caroline O. J, Arief Budhyantoro

pages: 2367-2373 [Full text](#) DOI:10.18517/ijaseit.8.6.3884

The Potential Areas for Crop Development in Morotai Island Regency, Indonesia

Suratman Sudjud, Ramli Hadun

pages: 2374-2379 [Full text](#) DOI:10.18517/ijaseit.8.6.7633

Water Harvesting as a Technological Innovation and Greater Solving of Climatic Change Impact to Supply Fertigation

Nurpilihan Bafdal, Sophia Dwiratna, Edy Suryadi, Dwi Rustam Kendarto

pages: 2380-2385 [Full text](#) DOI:10.18517/ijaseit.8.6.7697

Pavement Life Variation with Material Characteristics, Road Profiles and Environmental Effects

Rosnawati Buhari, Munzilah Md Rohani, Saifullizam Puteh

pages: 2386-2392 [Full text](#) DOI:10.18517/ijaseit.8.6.5842

Damage Level Prediction of Pier using Neuro-Genetic Hybrid

Reni Suryanita, Mardiyono Mardiyono, Harnedi Maizir

pages: 2393-2399 [Full text](#) DOI:10.18517/ijaseit.8.6.7096

Prioritizing Criteria of Earthquake Safe Housing in Earthquake Prone Areas: A Case of Housing in Padang City

Prima Fithri, Rika Ampuh Hadiguna, Puti Gina K I Putri

pages: 2400-2405 [Full text](#) DOI:10.18517/ijaseit.8.6.3482

Construction Method and Performance of Bugis Traditional House in Wind Disasters

Hartawan Madeali, Bambang Suhendro, E Pradipto, A Kusumawanto

pages: 2406-2412 [Full text](#) DOI:10.18517/ijaseit.8.6.5849

The Use of GIS and Hydrodynamic Model for Performance Evaluation of Flood Control Structure

I Gede Tunas, Rizaldi Maadji

pages: 2413-2420 [Full text](#) DOI:10.18517/ijaseit.8.6.7489

A Study of The Upstream-downstream Interface in End-to-end Tsunami Early Warning and Mitigation Systems

Maheshika Sakalasuriya, Dilanthi Amaratunga, Richard Haigh, Siri Hettige

pages: 2421-2427 [Full text](#) DOI:10.18517/ijaseit.8.6.7487

The Behaviours of the Brick-Masonry Infilled RC Frame Structure under Reversed Cyclic Lateral Loading

Maidiawati Maidiawati, Yasushi Sanada, Jafri Tanjung

pages: 2428-2434 [Full text](#) DOI:10.18517/ijaseit.8.6.7196

The Protection of Masonry Blocks with Using Hydrophobization Before Load Due to Increased Moisture

Novak Vitezslav, Zach Jiri

pages: 2435-2442 [Full text](#) DOI:10.18517/ijaseit.8.6.5855

Evaluation of Drought Vulnerability on Watersheds in West Sumatera Province by Using Cropwat-8 and GIS

Darwizal Daoed, Bujang Rusman, Bambang Istijono, Abdul Hakam, Masril Syukur

pages: 2443-2449 [Full text](#) DOI:10.18517/ijaseit.8.6.3520

Geometric Accuracy Assessment of Very High-Resolution Optical Data Orthorectified using TerraSAR-X DSM to Support Disaster Management in Indonesia

Inggil Lolita Sari, Sukentyas Estuti Siwi, Randy Prima Brahmantara, Haris Suka Dyatmika, Agus Suprijanto, Kuncoro Adi Pradono

pages: 2450-2459 [Full text](#) DOI:10.18517/ijaseit.8.6.7486

Index of Active Tectonic Assessment: Quantitative-based Geomorphometric and Morphotectonic Analysis at Way Belu Drainage Basin, Lampung Province, Indonesia



Template of Journal IJASEIT

Support Contact


WAG : +62-82171-822448

E-mail : ijaseit@insightsociety.org

The Map Authors



Keywords Cloud

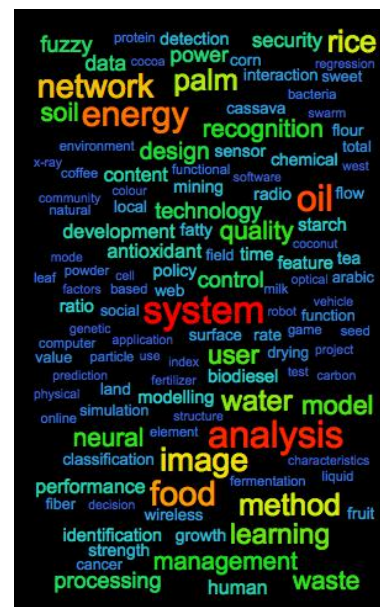

Published by



Member of

Dewi Gentana, Nana Sulaksana, Emi Sukiyah, Euis Tintin Yuningsih
 pages: 2460-2471 [Full text](#) DOI:10.18517/ijaseit.8.6.6089

Vibration Response Suppression of Space Structure using Two U-Shaped Water Container

Lovely Son, Mulyadi Bur, Eka Satria
 pages: 2472-2478 [Full text](#) DOI:10.18517/ijaseit.8.6.7195

Vertical Deformation and Ballast Abrasion Characteristics of Asphalt-Scrap Rubber Track Bed

Dian M Setiawan, Sri Atmaja Putra Rosyidi
 pages: 2479-2484 [Full text](#) DOI:10.18517/ijaseit.8.6.7411

Non-destructive Evaluation of Monosaccharides from Two Local Rice Varieties Using NIR Spectroscopy for Disease Prevention Through Dietary Mitigation

Muhammad Makky, Renny Eka Putri, Kohei Nakano, Santosa Santosa
 pages: 2485-2495 [Full text](#) DOI:10.18517/ijaseit.8.6.3517

The Effect of Water-Cement Ratio on Sulfate Resistance of Self-Compacting Concrete with Bagasse Ash

Hanafiah Hanafiah, Saloma Hasyim, Devin Yuwenka, M Emirzan Firdaus
 pages: 2496-2503 [Full text](#) DOI:10.18517/ijaseit.8.6.3967

Climate Changes Record of Bandung Paleolake

- Winantris, Lili Fauzielly, Lia Jurnaliah
 pages: 2504-2509 [Full text](#) DOI:10.18517/ijaseit.8.6.5769

Investigation of Pangkalan Floods: Possible Reasons and Future Directions

Revalin Herdianto, Bambang Istijono, Elvi Roza Syofyan, Dalrino Dalrino
 pages: 2510-2515 [Full text](#) DOI:10.18517/ijaseit.8.6.5825

Behavior of Modified Long Links with Supplemental Double Stiffeners on Eccentrically Braced Frames

Musbar Musbar, Bambang Budiono, Dyah Kusumastuti, Herlien D Setio
 pages: 2516-2524 [Full text](#) DOI:10.18517/ijaseit.8.6.5852

Tannin Extraction from Bark of Rhizophora Mucronata Using Soxhlet and Boiling Techniques

Ahmad Hafizan Muhammad Muhayyidin, Nurul Aimi Ghazali, Noor Fitrah Abu Bakar, Wan Asma Ibrahim, Arina Sauki, Zulkafli Hassan
 pages: 2525-2530 [Full text](#) DOI:10.18517/ijaseit.8.6.3899

Application of Embryo Transfer Technology to Improve Fertility Using GnRH Plus Progesterone and Estradiol Combination (FTAI) of Local South Pesisir Cow in West Sumatra

Zaituni Udin, - Hendri, Masrizal Masrizal
 pages: 2531-2538 [Full text](#) DOI:10.18517/ijaseit.8.6.7675

Fungal Production of Xylanase from Oil Palm Empty Fruit Bunches via Solid State Cultivation

Efri Mardawati, MTAP Kresnowati, Ronny Purwadi, Yazid Bindar, Tjandra Setiadi
 pages: 2539-2546 [Full text](#) DOI:10.18517/ijaseit.8.6.4196

Impact Assessment of State Assistance Program to Agri-based Micro, Small and Medium Enterprises in the Philippines

Charles Allen L. Herpacio, Hanilyn Hidalgo
 pages: 2547-2554 [Full text](#) DOI:10.18517/ijaseit.8.6.6660

Properties of DMF-fossil gasoline RON95 blends in the consideration as the alternative fuel

Anh Tuan Hoang, Danh Chan Nguyen
 pages: 2555-2560 [Full text](#) DOI:10.18517/ijaseit.8.6.7214

Study of Internal Pressure Impact on Sphere Tank Towards Vapour Cloud Explosion: Feyzin Incident

Anis Farhanah Binti Mohd Suhaimi Yeong, Zulkifli Abdul Rashid, Azil Bahari Alias
 pages: 2561-2569 [Full text](#) DOI:10.18517/ijaseit.8.6.5409

Inner-Canthus Localization of Thermal Images in Face-View Invariant

Hurriyatul Fitriyah, Edita Rosana Widasari, Rekyan Regasari Mardi Putri
 pages: 2570-2576 [Full text](#) DOI:10.18517/ijaseit.8.6.3903

Classification of Polymorphic Virus Based on Integrated Features

Isredza Rahmi A Hamid, Sharmila Subramaniam, Zubaila Abdullah
 pages: 2577-2583 [Full text](#) DOI:10.18517/ijaseit.8.6.5045



Anti-Theft Vehicle Tracking System Using GPS and Location Prediction*Dhanya N.M.*pages: 2584-2589 [Full text](#) DOI:10.18517/ijaseit.8.6.2847**Consistency Check between XML Schema and Class Diagram for Document Versioning***Rosziati Ibrahim, Hannani Aman, Richi Nayak, Sapiee Jamel*pages: 2590-2597 [Full text](#) DOI:10.18517/ijaseit.8.6.5007**On the Fly Access Request Authentication: Two-Layer Password-Based Access Control Systems for Securing Information***Muhammed Jassem Al-Muhammed, Ahmad Daraiseh*pages: 2598-2611 [Full text](#) DOI:10.18517/ijaseit.8.6.6329**Online Reputation Model Using Multiple Quality Factors***Mohammad Azzeh, Mohammad Hijjawi, Ahmad M Altamimi*pages: 2612-2619 [Full text](#) DOI:10.18517/ijaseit.8.6.6259**A Model for Afghanistan's Cyber Security Incident Response Team***Islahuddin Jalal, Maryati Mohd Yusof, Zarina Shukur, Mohd. Rosmadi Mokhtar*pages: 2620-2626 [Full text](#) DOI:10.18517/ijaseit.8.6.6692**Evaluating Usability of Serious Games for Therapeutic Purpose: A Study of ASAH-i***Nadia Akma Ahmad Zaki, Tengku Siti Meriam Tengku Wook, Kartini Ahmad*pages: 2627-2634 [Full text](#) DOI:10.18517/ijaseit.8.6.6428**A Review on Missing Tags Detection Approaches in RFID System***Nur'Aifaa Zainudin, Hairulnizam Mahdin, Rd Rohmat Saedudin, Mohd Sanusi Azmi, Mokhairi Makhtar, Norhailawati Misran*pages: 2635-2640 [Full text](#) DOI:10.18517/ijaseit.8.6.5184**Internet of Things: An Implementation and Its Challenges in Malaysia***Ummi Wahida Badarudin, Wan Isnai Sofiah Wan Din, Yuli Adam Prasetyo, Zalili Musa, Shahreen Kasim*pages: 2641-2647 [Full text](#) DOI:10.18517/ijaseit.8.6.5043**Design and Implementation of Automated Ankle Foot Orthosis for Foot Drop Patients Using Gait Cycle EMG Analysis***Md. Mamunoor Islam, Md. Humayun Kabir, Quazi Delwar Hossain*pages: 2648-2653 [Full text](#) DOI:10.18517/ijaseit.8.6.5749**A New Method for Battery Lifetime Estimation Using Experimental Testbed for Zigbee Wireless Technology***Dahlila Putri Dahnil, Supiah Selamat, Khairul Azmi Abu Bakar, Rosilah Hassan, Ahmad G. Ismail*pages: 2654-2662 [Full text](#) DOI:10.18517/ijaseit.8.6.6388**Blocks Correctness Evaluation Methodology for Block-Based Software Development***Abdullah Mohd Zin, Mustafa Almatary, Marini Abu Bakar, Rodziah Latih, Norleyza Jailani*pages: 2663-2669 [Full text](#) DOI:10.18517/ijaseit.8.6.6664**Classification of Spatio-Temporal fMRI Data in the Spiking Neural Network***Shaznoor Shakira Saharuddin, Norhanifah Murl, Muhammad Azani Hasibuan*pages: 2670-2676 [Full text](#) DOI:10.18517/ijaseit.8.6.5011**Performances Analysis of Heart Disease Dataset using Different Data Mining Classifications***Wan Hajarul Asikin Wan Zunaidi, RD Rohmat Saedudin, Zuraini Ali Shah, Shahreen Kasim, Choon Sen Seah, Maman Abdurhman*pages: 2677-2682 [Full text](#) DOI:10.18517/ijaseit.8.6.5042**Rules Discovery of High Ozone in Klang Areas using Data Mining Approach***Zulaiha Ali Othman, Noraini Ismail, Azuraliza Abu Bakar, Mohd Talib Latif, Sharifah Mastura Syed Abdullah*pages: 2683-2689 [Full text](#) DOI:10.18517/ijaseit.8.6.6689**The effectiveness of Papain Enzyme Supplementation in Artificial Feed on Growth and Survival Rate of Mangrove Crab Larvae (Scylla Olivacea)***H Haryati, Edison Saade*pages: 2690-2695 [Full text](#) DOI:10.18517/ijaseit.8.6.6339

A Challenge in Providing Housing Land and Sustainable Agricultural Land; An Effort to Meet The Backlog of Housing and Food Security in West Sumatra

- Yossyafra, Melinda Noer, Rini Hakimi, Muhamad Reza

pages: 2696-2701 [Full text](#) DOI:10.18517/ijaseit.8.6.7262

Landscape Ecological Changes and Livelihood Dilemma of the Rural Household around the Oil Palm Plantation

Reni Fatmasari, Rahim Darma, Darmawan Salman, Yunus Musa

pages: 2702-2708 [Full text](#) DOI:10.18517/ijaseit.8.6.7257

The Characteristics of LiFePO₄/Copper Nanoparticles/Carbon Nanotubes Composites Used as Lithium Ion Battery Cathode

Nofrijon Sofyan, Ratna Permata Sari, Anne Zulfia, Evvy Kartini

pages: 2709-2713 [Full text](#) DOI:10.18517/ijaseit.8.6.3519

17,18-dihydroxy Montecristin Compound from the Stem Bark of the Soursop (Annona muricata Linn.)

Pince Salempa, - Muharram, Iwan Dini, Paulina Taba, Asriani Ilyas

pages: 2714-2720 [Full text](#) DOI:10.18517/ijaseit.8.6.6262

Published by INSIGHT - Indonesian Society for Knowledge and Human Development

© IJASEIT - ISSN: 2088-5334 | e-ISSN : 2460-6952 | DOI : 10.18517



is licensed under a Creative Commons Attribution-ShareAlike 4.0 International License.

00567251 [View My Stats](#)

The Effect of Water-Cement Ratio on Sulfate Resistance of Self-Compacting Concrete with Bagasse Ash

Hanafiah[#], Saloma[#], Devin Yuwenka[#], and M Emirzan Firdaus[#]

[#]Civil Engineering, Sriwijaya University, Palembang-Prabumulih KM. 32 Ogan Ilir, Indralaya, 30662, Indonesia
E-mail: saloma_571@yahoo.co.id

Abstract— Previous study showed so many factors will contribute to the durability of concrete, such as cement content, water cement ratio, admixtures to be used, compaction dan curing methods. Two types of admixtures for concrete mixture can be used, e.g. chemical admixture and mineral admixture. Materials can be categorized as mineral admixture such as fly ash, silica fume, risk husk ash, and bagasse ash. Sulfate resistance of concrete is one of the examples of chemical durability of concrete. Self-Compacting Concrete (SCC) known as concrete which can flow within its self-weight and without forming honeycombing, segregation and bleeding, even with no compaction. In this experimental work, bagasse ash was used in concrete mixture as partial replacement of cement with the percentage of 10%, 15% and 20%. The variation of w/b were used e.g 0.275, 0.300 and 0.325. For the purpose to stipulate the sulfate attack on concrete, the cylinder specimen with size of 100 x 200 mm and magnesium sulfate solution with 5% and 7% molarity were used. To observe the percentage of concrete weight loss, all the specimen were immersed in this solution within 28 days. The result showed that the value of compressive strength for the specimen with w/b = 0.275 and 15% bagasse ash was up to 67.240 MPa for 28 days and 68.096 MPa for 56 days without immersion in magnesium sulfate solution. The highest percentage of concrete weight loss is 3.030% yielded from the specimen with w/b = 0.325 and 0% bagasse ash which was immersed in 7% molarity of magnesium sulfate solution.

Keywords— self-compacting concrete; magnesium sulfate; bagasse ash.

I. INTRODUCTION

Self-Compacting Concrete (SCC) is defined as a new concrete innovation that does not require compaction. This concrete can flow with its weight and fill the formwork. This concrete is hardened, homogeneous, and also has the same properties and durability as conventional concrete, which is vibrated [1]-[3].

Experimental work [4] was about the permeability of SCC compared to conventional concrete. In the study, they used pozzolanic fly ash (PFA) and limestone powder as additional binder and admixture, then divided into two types of SCC concrete which are medium and high strength. Air permeability test results in Hadlow or better permeability results than conventional concrete. For water permeability test results, only SCC concrete containing PFA and limestone powder had a low resistance or permeability compared to conventional concrete which is vibrated. The production of SCC is through testing its durability against sulfuric acid on the compressive strength of concrete [2], [5]-[7]. SCC concrete was made using limestone as filler. Besides that, the researchers also used coarse and fine aggregates, silica, and limestone. The test results that obtained for compressive strength of concrete at 28 days

before immersion with sulfuric acid was SCC concrete with LA-LS-20LF2 mix design of 60.2 MPa.

The definition of workability is the properties of the fresh concrete that determines the ease of work and homogeneity properties of concrete that can be stirred, transported, compacted, and completed [8]-[10]. The criteria of w/c have been defined from existing literature such as [8], [11]-[14]. Some w/c criteria for fresh concrete SCC can be seen in Table 1.

TABLE I
THE CRITERIA OF W/C FOR FRESH CONCRETE OF SCC

Criteria	Slump flow test (mm)		T ₅₀₀ test (s)		V-funnel test (s)	
	Min	Max	Min	Max	Min	Max
EFNARC	650	800	2	5	6	12
JSCE	500	750	3	25	7	20

II. MATERIALS AND METHODS

The method of study used was the experimental method. Experimental that conducted was in the form of testing of fresh concrete and hardened concrete. This study was conducted by using variations of sugarcane bagasse ash (SCBA) of 0%, 10%, 15%, and 20% of the amount of

cement used. Variation w/c were w/c = 0.275, w/c = 0.300, and w/c = 0.325. Fresh concrete tests include slump flow test, V-funnel, and L-box, while hardened concrete tests include the durability of concrete by immersing the samples into water mixed with MgSO₄ with two variations of 5% and 7%. Immersion was done for 28 days after the concrete age was 28 days, the compressive strength test was conducted using cylindrical test samples of 100 mm x 200 mm. After the compressive strength test, the microstructure test of concrete was conducted by SEM.

A. Material

This study used Ordinary Portland Cement (OPC) type I with a fineness of 340m²/kg. The water used for the concrete mixture must be clean, no oil, and no impurities which can damage the concrete. This study used distilled water because distilled water is free from organic impurities or other impurities. The sugarcane bagasse ash that used was from PT. Sugar Group Companies (Persero) Lampung. The SCBA was sieved with No.200 sieve. The test of chemical contents was done at PT. Semen Baturaja Laboratory. The results of the test are shown in Table 2. SEM test was done at the Centre of Research and Development Marine Geology Laboratory, Bandung; the test results can be seen in Figure 1.

The fine aggregate sizes used in this study were two sizes that less than 4 mm and quartz sand with the size of 50-650 µm. The coarse aggregate size used in this study was the maximum of 10 mm. The coarse aggregate used was Merak split stone. Chemical admixture used in this study was superplasticizer type F. Superplasticizer type F has the density of 1.04 kg/Liter and were used to reduce water usage and accelerate the binding process of concrete. The durability test was done by immersing the samples into a tub containing distilled water mixed with magnesium sulfate (MgSO₄) with 5% and 7% concentration.

TABLE II
SCBA CONTENT TEST RESULTS

No.	Content	Weight (%)
1.	Silicon Dioxide (SiO ₂)	83.40
2.	Aluminum Oxide (Al ₂ O ₃)	0.00
3.	Iron (III) Oxide (Fe ₂ O ₃)	5.00
4.	Calcium Oxide (CaO)	2.38
5.	Magnesium Oxide (MgO)	0.00
6.	Sulfur Trioxide (SO ₃)	0.61
7.	LOI	8.36

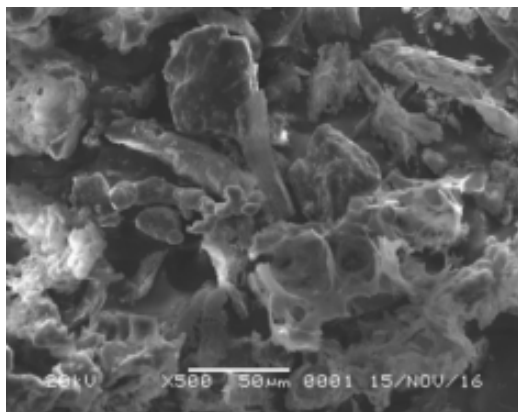


Fig. 1 SEM microstructure of SCBA

B. Mixture proportion

The mixture compositions of SCC were arranged by collecting data from journals and standards of EFNARC and ACI. The mixture compositions in this study consisted of 16 mixture variations. The mixed composition of SCC used can be seen in Table 3.

TABLE III
MIXTURE PROPORTION OF 1m³ SCC MIXES

Mix	OPC (kg)	SCBA (kg)	FA (kg)		CA (kg)	Water (kg)
			1	2		
SCC-0-0.275	600	0	246	540	823	165
SCC-0-0.300	600	0	246	540	823	180
SCC-0-0.325	600	0	246	540	823	195
SCC-5-0.275	540	60	246	540	823	165
SCC-5-0.300	540	60	246	540	823	180
SCC-5-0.325	540	60	246	540	823	195
SCC-10-0.275	510	90	246	540	823	165
SCC-10-0.300	510	90	246	540	823	180
SCC-10-0.325	510	90	246	540	823	195
SCC-15-0.275	480	120	246	540	823	165
SCC-15-0.300	480	120	246	540	823	180
SCC-15-0.325	480	120	246	540	823	195

III. RESULTS AND DISCUSSION

A. Slump flow

The results of the slump flow test were obtained from four directions, and then the data were averaged. Slump flow test results can be seen in Figure 2. In Figure 2, the addition of sugarcane bagasse ash (SCBA) to the composition of the mixture affects the slump flow value. The more SCBA is used, the lower slump flow value is obtained. The decrease result of the slump flow based on SCBA content can be seen in Table 4.

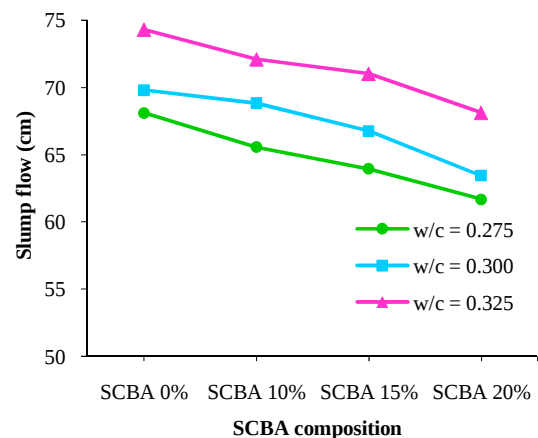


Fig. 2 The effect of SCBA on slump flow

Table 4 shows that the highest and lowest slump flow was found in w/c = 0.275 with 20% SCBA mixture and in w/c = 0.325 with 10% SCBA mixture with values of 9.43% and 1.39%. Figure 3 indicates that based on the effect of w/c ratio there is an increase in slump flow. The highest slump flow was found in w/c = 0.325 with 0% SCBA mixture, while the lowest slump flow was in w/c = 0.275 with 20% SCBA mixture.

TABLE IV
THE DECREASE PERCENTAGE OF SLUMP FLOW VALUE BASED ON SCBA COMPOSITION

w/c	AAT (%)	Slump flow (cm)	Change Percentage (%)
0.275	0	68.10	0.00
	10	65.56	-3.73
	15	63.94	-6.11
	20	61.68	-9.43
0.300	0	69.80	0.00
	10	68.83	-1.39
	15	66.76	-4.36
	20	63.44	-9.11
0.325	0	74.30	0.00
	10	72.10	-2.96
	15	71.03	-4.40
	20	68.10	-8.34

B. V-funnel

Figure 3 of the test results shows that the increase of sugarcane bagasse ash, the flow time becomes longer. This is because the sugarcane bagasse ash has a high absorbency ability so that the viscosity of concrete increases.

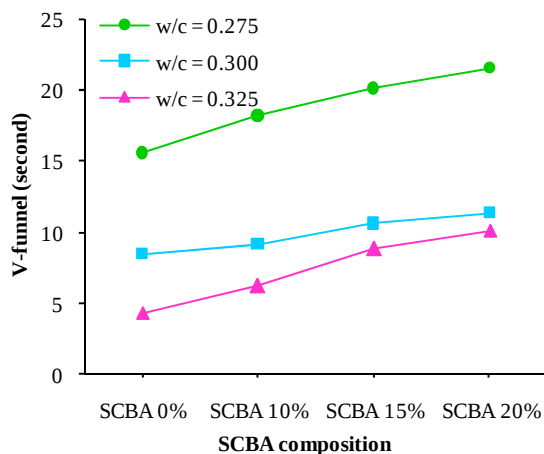


Fig. 3 The effect of SCBA on V-funnel

Table 4 explains that the V-funnel value is greater as the addition of SCBA, so the greater value or time obtained in V-funnel test. The highest and lowest increase percentage of V-funnel value is in w/c = 0.325 with 20% SCBA mixture and w/c = 0.300 with 10% SCBA mixture with each value of 134.03% and 8.06%.

TABLE V
THE INCREASE PERCENTAGE OF V-FUNNEL VALUE BASED ON SCBA COMPOSITION

w/c	SCBA (%)	Duration (sec)	Increase percentage (%)
0.275	0	15.15	0.00
	10	18.13	16.59
	15	20.09	29.20
	20	21.49	38.20
0.300	0	8.44	0.00
	10	9.12	8.06

0.325	15	10.58	25.36
	20	11.34	34.36
	0	4.32	0.00
	10	6.22	43.98
	15	8.79	103.47
	20	10.11	134.03

C. L-box

The tests were performed on four mixture compositions with each mixture composition consisting of three variations of w/c ratio. The L-box test results can be seen in Figure 4.

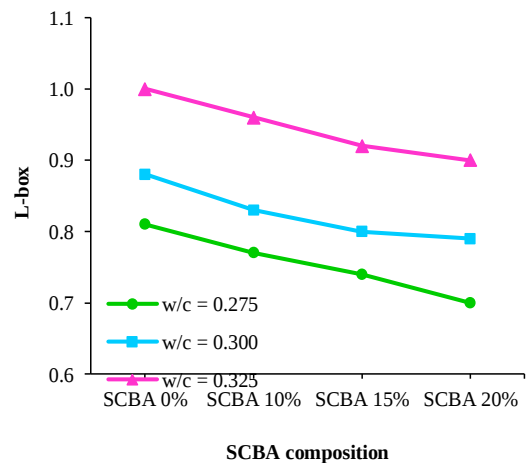


Fig. 4 The effect of SCBA on L-box

Figure 4 and Table 4 shows the results obtained in the L-box test indicates that the higher w/c ratio causes the higher L-box test value. The addition of SCBA also affects the result of the L-box value, the more significant addition of SCBA causes the smaller obtained test results.

TABLE VI
THE DECREASE PERCENTAGE OF L-BOX BASED ON SCBA COMPOSITION

w/c	SCBA (%)	H ₂ /H ₁	Decrease percentage (%)
0.275	0	0.81	0.00
	10	0.77	-4.94
	15	0.74	-8.64
	20	0.70	-13.58
0.300	0	0.88	0.00
	10	0.83	-5.68
	15	0.82	-6.82
	20	0.79	-10.23
0.325	0	1.00	0.00
	10	0.96	-4.00
	15	0.92	-8.00
	20	0.90	-10.00

D. Mass Change

Mass testing is the ratio of the mass of samples before immersion and after immersion in MgSO₄ for 28 days. Figure 5 shows the mass test was performed by measuring the weight of the samples before and after being immersed in 5% MgSO₄.

Figure 6 shows that there was a decrease in the concrete mass with w/c = 0.300. The highest decrease of concrete

mass was found in the mixture composition with SCBA 20% of 45 grams.

Based on Figure 7, it shows that the highest concrete mass decrease occurred in concrete with $w/c = 0.325$ and SCBA content of 10% with a decrease value of 50 grams, while the lowest decrease was in the mixture composition with $w/c = 0.325$ and SCBA content of 15%. The sulfate resistance test was also performed on the $MgSO_4$ solution with 7% concentration.

Figure 8 shows there was a mass decrease in SCC with SCBA content with $w/c = 0.275$. The highest decrease was found in SCBA 10% concrete of 70 grams, while the lowest decrease was found in SCBA 20% concrete with 40 grams.

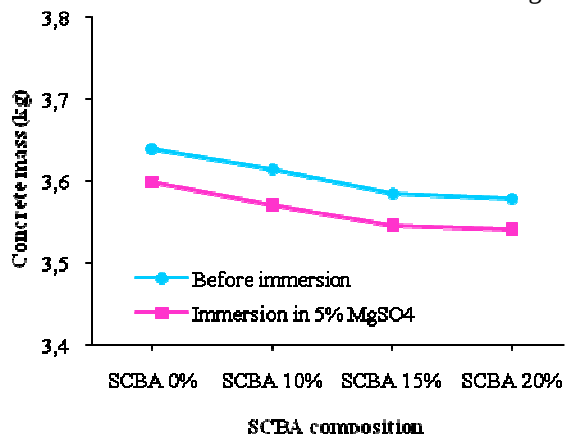


Fig. 5 The effect of SCBA content on concrete mass with $w/c = 0.275$ ($MgSO_4 = 5\%$)

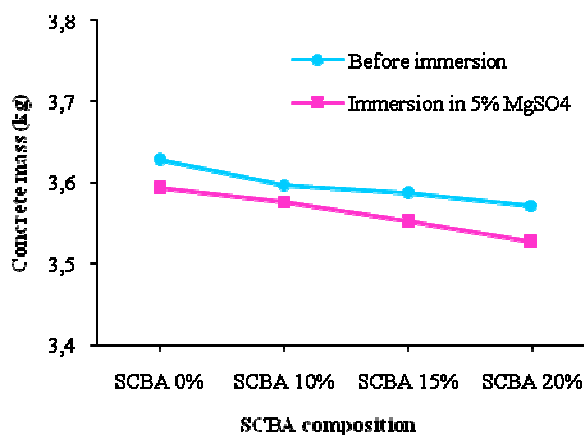


Fig. 6 The effect of SCBA content on concrete mass with $w/c = 0.300$ ($MgSO_4 = 5\%$)

Based on Figure 9 shows that the highest decrease of concrete mass was in the mixture composition with SCBA0% by 55 grams, while the lowest decrease was in the mixture composition with SCBA15% by 30 grams.

Based on Figure 10, it shows that the highest and lowest concrete mass decrease was found in SCBA20% and SCBA15% concrete with a mass decrease value of 85 grams and 35 grams. The result of concrete mass measurement conducted by immersing in 5% of $MgSO_4$ found that the mass decrease ranged between 20 grams up to 50 grams. The highest decrease in mass with a decrease of 45 grams occurred in the mixture composition of the SSC-10-0.325.

The lowest decrease in mass with a 20 grams decrease occurred in the mixture composition of SSC-20-0.275.

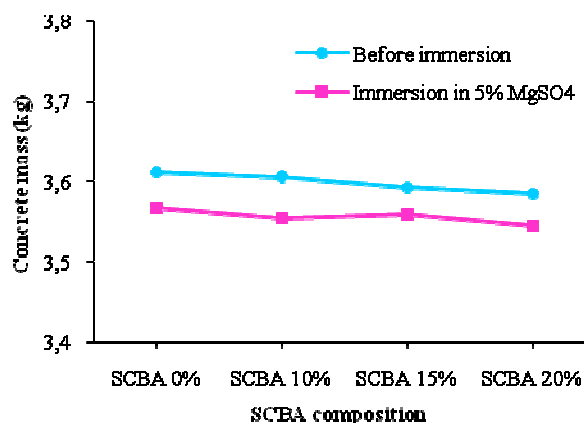


Fig. 7 The effect of SCBA content on concrete mass with $w/c = 0.325$ ($MgSO_4 = 5\%$)

The decreased range of concrete mass in the 7% $MgSO_4$ sulfate resistance test between 35 grams up to 100 grams. The highest decrease in mass with a decrease of 100 grams occurred in the mixture composition of SSC-0-0.325, while the lowest mass decrease with a 35 grams decreases occurred in the composition of the SSC-15-0.325 mixture.

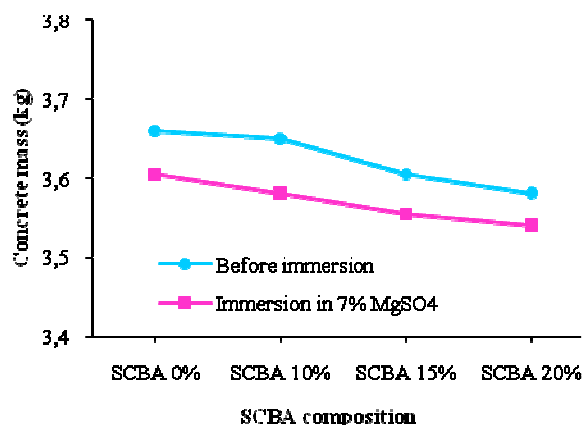


Fig. 8 The effect of SCBA content on concrete mass with $w/c = 0.275$ ($MgSO_4 = 7\%$)

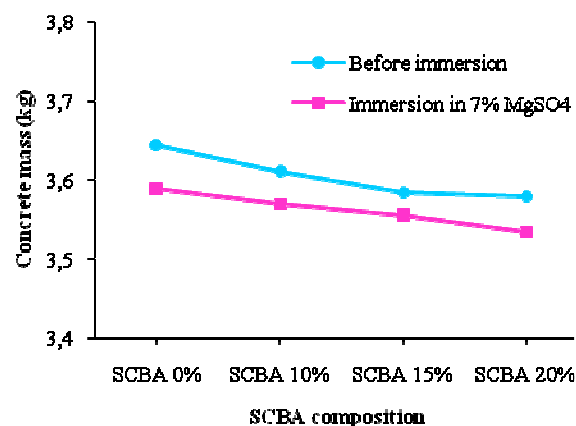


Fig. 9 The effect of SCBA content on concrete mass with $w/c = 0.300$ ($MgSO_4 = 7\%$)

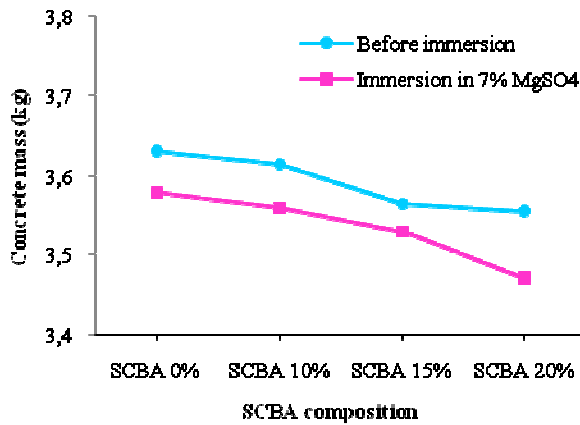


Fig. 10 The effect of SCBA content on concrete mass with w/c = 0.325 (MgSO₄ = 7%)

The recapitulation of the effect of 5% and 7% MgSO₄ on the mass of concrete can be seen in Table 7 and Table 8. Based on Table 7, the sulfate resistance test in 5% MgSO₄ solution was obtained the result of the percentage with the highest mass decrease occurred in the composition of the SSC-10-0.325 with a value of 1.399%, while the lowest percentage occurred in the composition of the mixture SCC-20-0.275 with a value of 0.557%, so the percentage range of concrete mass decreases was between 0.557% to 1.399%.

Table 8 shows the sulfate resistance test in the 7% MgSO₄ solution was obtained a percentage with the highest compressive strength decrease occurred in SCC concrete with a value of 2.770% in the mixture composition of SCC-0-0.325. The lowest percentage occurred in the mixture composition of SCC-15-0.275 with a value of 1.113 %/ The percentage range of SCC concrete mass decreases that occurred in the test of 7% sulfate resistance MgSO₄ was 1.113% up to 2.770%.

TABLE VII
THE RESULT OF SCC CONCRETE MASS AFTER SULFATE RESISTANCE TEST IN 5% MgSO₄ DURING 28 DAYS

Mix design	Mass (kg)		Decrease percentage
	Before immersion	MgSO ₄ 5%	
SSC-0-0.275	3.640	3.600	1.099
SSC-0-0.300	3.628	3.593	0.965
SSC-0-0.325	3.612	3.567	1.246
SSC-10-0.275	3.615	3.570	1.245
SSC-10-0.300	3.597	3.557	1.112
SSC-10-0.325	3.575	3.525	1.399
SSC-15-0.275	3.585	3.545	1.116
SSC-15-0.300	3.577	3.542	0.979
SSC-15-0.325	3.553	3.523	0.844
SSC-20-0.275	3.588	3.568	0.557
SSC-20-0.300	3.582	3.557	0.698
SSC-20-0.325	3.570	3.535	0.980

TABLE VIII
THE RESULT OF SCC CONCRETE MASS AFTER SULFATE RESISTANCE TEST IN 5% MgSO₄ DURING 28 DAYS

Mix design	Mass (kg)		Decrease percentage
	Before immersion	MgSO ₄ 7%	
SSC-0-0.275	3.660	3.605	1.503

SSC-0-0.300	3.645	3.555	2.469
SSC-0-0.325	3.610	3.510	2.770
SSC-10-0.275	3.650	3.580	1.918
SSC-10-0.300	3.630	3.570	1.653
SSC-10-0.325	3.605	3.560	1.248
SSC-15-0.275	3.595	3.555	1.113
SSC-15-0.300	3.585	3.535	1.395
SSC-15-0.325	3.565	3.530	0.982
SSC-20-0.275	3.580	3.540	1.117
SSC-20-0.300	3.580	3.535	1.257
SSC-20-0.325	3.555	3.470	2.391

E. Compressive Strength Change

The compressive strength test was performed when the concrete had been immersed for 28 days. The test samples performed by compressive strength test were the non-immersed concrete and immersed concrete into 5% and 7% MgSO₄. Figure 11 shows the difference in compressive strength results in SCC concrete due to the different composition of mineral additives although with the same w/c of 0.275. The result of compressive strength of 5% MgSO₄ concrete had decreased the compressive strength compared with the non-immersed concrete.

Based on Figure 12, SCC compressive strength results in variations of SCBA with w/c = 0.300. The highest compressive strength was found in the composition of SSC-15-0.300 mixture. The result of compressive strength before immersion was 66.237 MPa and after immersion 5% MgSO₄ was 62.932 MPa.

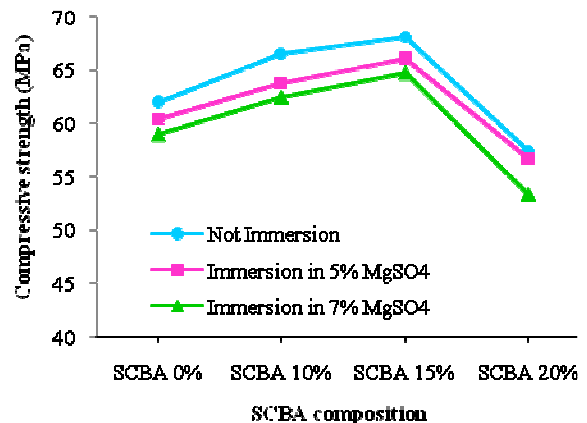


Fig. 11 The effect of SCBA composition on concrete mass with w/c = 0.275

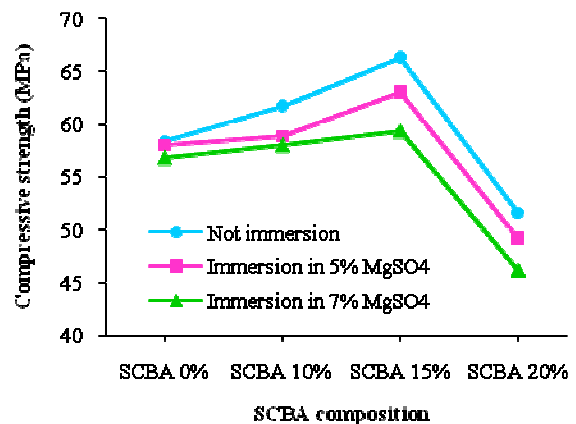


Fig. 12 The effect of SCBA composition on concrete mass with w/c = 0.300

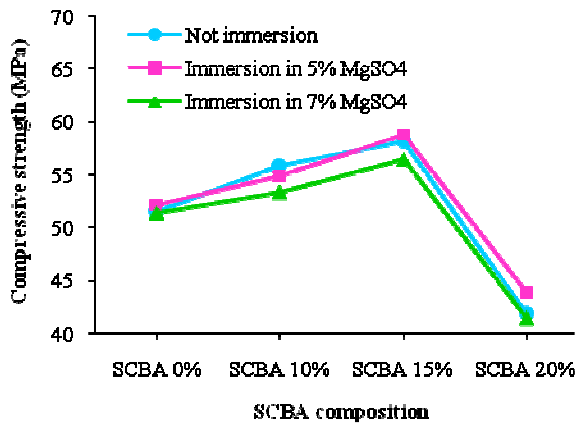


Fig. 13 The effect of SCBA composition on concrete mass with $w/c = 0.325$

Figure 13 shows the compressive strength of SCC for $w/c = 0.325$ with variations in the use of SCBA. The concrete compressive strength results of SCC showed that the mixture composition of SSC-15-0.325 had the highest compressive strength of non-immersed or immersed concrete in 5% MgSO₄ with each value of 60.553 MPa and 58.786 MPa. The recapitulation of the effect of MgSO₄ on the compressive strength of SCC concrete can be seen in Table 9.

Based on Table 9 and 10, the highest compressive strength was found in the mixture composition of SSC-15-0.275 with 68.096 MPa, while the lowest compressive strength was found in the mixture composition of SSC-20-0.325 with 45.598 MPa. The highest percentage of compressive strength decrease in SCC concrete immersed at 5% MgSO₄ occurred in the mixture composition of SSC-15-0.300 with a value of 4.990%, while the lowest percentage occurred in the composition of the mixture SCC-0-0.300 with value 0.531%. The concrete immersed at 7% MgSO₄ had the highest decrease of compressive strength with a value of 10.469% in the mixture composition of SCC-20-0.300, while the lowest percentage occurred in the mixture composition of the SCC-0-0.300 mixture with a value of 2.742%.

TABLE IX
THE RESULT OF SCC COMPRESSIVE STRENGTH AFTER SULFATE
RESISTANCE TEST IN 5% MgSO₄ DURING 28 DAYS

Mix design	Compressive strength(MPa)		Decrease percentage
	Not immersion	Immersion in MgSO ₄ 5%	MgSO ₄ 5%
SSC-0-0.275	61.926	60.408	2.451
SSC-0-0.300	58.389	58.079	0.531
SSC-0-0.325	53.845	52.182	3.088
SSC-10-0.275	66.591	63.821	4.160
SSC-10-0.300	61.604	58.889	4.407
SSC-10-0.325	55.890	54.900	3.469
SSC-15-0.275	68.096	66.011	3.062
SSC-15-0.300	66.237	62.932	4.990
SSC-15-0.325	60.553	58.786	2.918
SSC-20-0.275	57.470	56.738	1.274
SSC-20-0.300	51.627	49.149	4.800
SSC-20-0.325	45.598	43.920	3.680

TABLE X
THE RESULT OF SCC COMPRESSIVE STRENGTH AFTER SULFATE
RESISTANCE TEST IN 7% MgSO₄ DURING 28 DAYS

Mix design	Compressive Strength (MPa)		Decrease percentage
	Not immersion	Immersion in MgSO ₄ 7%	MgSO ₄ 7%
SSC-0-0.275	61.926	58.933	2.451
SSC-0-0.300	58.389	56.788	0.531
SSC-0-0.325	53.845	51.442	3.088
SSC-10-0.275	66.591	62.490	4.160
SSC-10-0.300	61.604	58.014	4.407
SSC-10-0.325	55.890	53.295	3.469
SSC-15-0.275	68.096	64.728	3.062
SSC-15-0.300	66.237	59.311	4.990
SSC-15-0.325	60.553	56.472	2.918
SSC-20-0.275	57.470	53.384	1.274
SSC-20-0.300	51.627	46.222	4.800
SSC-20-0.325	45.598	41.446	3.680

F. Microstructure Test

Microstructure test done was a SEM test. The SEM test results were with the magnification of 7000 x can be seen in Figures 14. SEM samples were obtained after 28 days of sulfate resistance test at 56 days of concrete age.


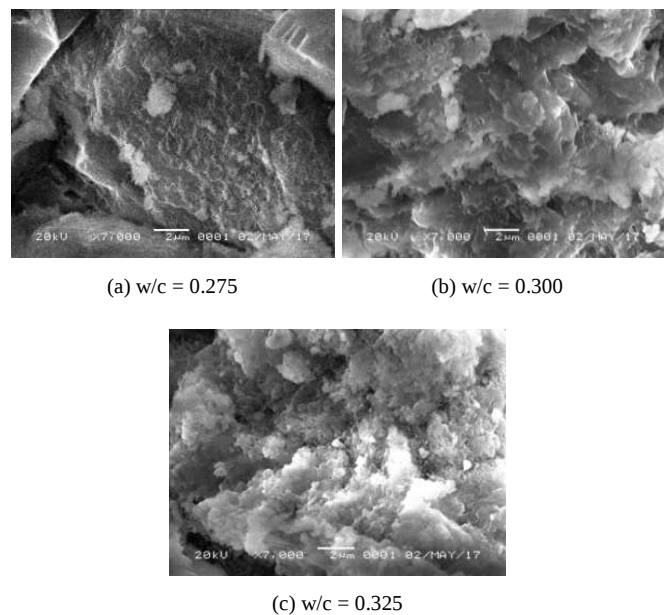



Fig. 14 Photo of SEM SCC 15% SCBA not immersion

Figure 14 (a) is a SEM photo of SCC-15-0.275 indicating that almost all parts had formed CSH. SCC-15-0.275 showed the most solid SEM photo compared to mixture compositions with different w/c , and there was a small amount of CH. Figure 14 (b) is a SEM photo of SCC-15-0.300, indicating that CSH had formed solidly and formed pore with a tiny scale of 2 μ m. Figure 14 (c) is a SEM photo of SCC-15-0.325 indicating that CSH had formed, but it is not denser than other w/c mixture compositions, and there were many pores that less than 1 μ m in size. The less dense CSH causes a decrease of the concrete compressive strength.

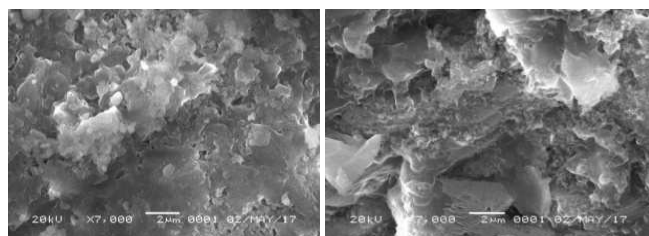

(a) w/c = 0.275


(b) w/c = 0.300

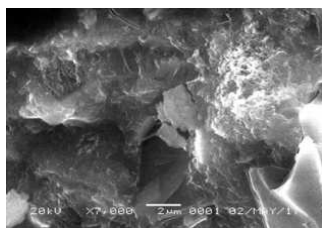

(c) w/c = 0.325


Fig. 15 Photo of SEM SCC 15% SCBA immersion in 5% MgSO_4

Figure 15 is a SEM photo with 15% SCBA immersed in MgSO_4 with 5% concentration. Figure 15 (a) is a SEM photo of SCC-15-0.275 indicating that it had very solid CSH compared to other w/c and there was no CH. Figure 15 (b) is a SEM photo of SCC-15-0.300 indicating that CSH had formed quite dense and there was CH as the residual reaction of cement hydration. Figure 15 (c) shows a SEM photo of SCC-15-0.325 indicating that CSH formed less dense and there were many CH. The formed CH causes a compressive strength decrease due to the absence of the cement matrix bond.

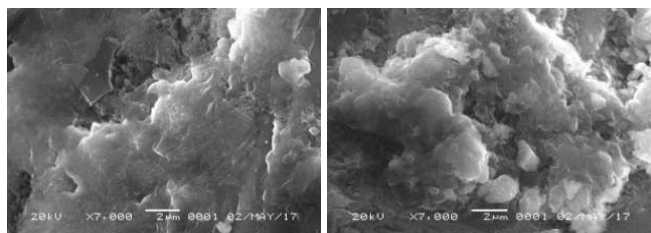

(a) w/c = 0.275

(b) w/c = 0.300

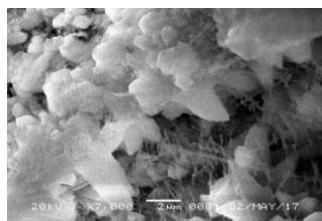

(c) w/c = 0.325

Fig. 16 Photo of SEM SCC 15% SCBA immersion in 7% MgSO_4

Figure 16 is a SEM photo with 15% SCBA immersed in MgSO_4 with 7% concentration. Figure 16 (a) is SEM photo of SCC-15-0.275 indicating that there was the most denser CSH than the other w/c CSH and there was only a small amount of CH. Figure 16 (b) is a SEM photo of SCC-15-0.300, the CSH had been very solid, but not denser than w/c = 0.275. Figure 16 (c) is a SEM photo of SCC-15-0.32 indicating that the CSH had formed quite solid. At the

bottom of CSH, CH was formed where the ettringite was also formed. The formation of ettringite on hardened concrete should be avoided because it causes expansion that creates micro crack in the concrete that makes the decrease of concrete strength.

IV. CONCLUSIONS

The result of the concrete mass change test in the 5% MgSO_4 solution, the highest and lowest mass decreases were 45 grams and 20 grams. In the 7% MgSO_4 solution, the highest and lowest mass decreases were 110 grams and 35 grams. The highest percentage mass decrease or mass reduction was 3.030% in the compositions of SCC-0-0.325 mixture immersed in a 7% MgSO_4 solution.

The highest and lowest compressive strengths obtained after immersion in a 5% MgSO_4 solution were 66.011 MPa and 43.920 MPa. The highest percentage of compressive strength decrease was found in the composition of the SCC-15-0.300 mixture of 4.990%. The highest and lowest compressive strength obtained after immersion in a 7% MgSO_4 solution were 64.728 MPa and 41.446 MPa. The highest percentage of compressive strength decrease was found in the composition of the SCC-20-0.300 mixture of 10.469%.

The effects of SCBA content on the durability of SCC are as follows: The results 56 days compressive strength test shows the use of 15% SCBA substitution on cement resulted in the highest compressive strength. The highest compressive strength of 56 days on the compositions of SCC-15-0.275 mixture is 68.096 MPa. The durability test result was an immersion in MgSO_4 solution, 15% SCBA use resulted in the highest compressive strength, while 20% SCBA use resulted in the lowest compressive strength.

The effect of w/c ratio variations durability of SCC are as follows: The results of the compressive strength test 56 days with w/c = 0.275 resulted in the highest compressive strength, the higher value of w/c ratio causes the decrease of concrete compressive strength. The highest percentage decrease of 28 days was found in the mixture of SCC-20-0.325 which was 23.932% to the mixture SCC-20-0.275. The results of durability test with immersion in MgSO_4 solution of w/c ratio = 0.275 resulted in the highest compressive strength, while w/c ratio = 0.325 resulted in the lowest compressive strength. The result of the SCC microstructure test shows that w/c = 0.275 gives more solid CSH and less amount of CH than other w/c mixtures.

ACKNOWLEDGMENTS

The research presented in this paper was supported by a grant from Unggulan Kompetitif Universitas Sriwijaya, 2017.

REFERENCES

- [1] E. F. for S. C. C. and C. S. (EFNARC), "Specification and guidelines for self-compacting concrete," *Eur. Fed. Natl. Assoc. Represent. Prod. Appl. Spec. Build. Prod. Concr.*, p. 32, 2002.
- [2] M. Sonebi and S. Nanukuttan, "Transport properties of self-consolidating concrete," *ACI Mater. J.*, vol. 106, no. 2, p. 161, 2009.
- [3] M. T. Bassuoni, M. Nehdi, and M. Amin, "Self-compacting concrete: using limestone to resist sulfuric acid," *Proc. Inst. Civ. Eng. Mater.*, vol. 160, no. 3, pp. 113–123, 2007.

- [4] H. Mazaheripour, S. Ghanbarpour, S. H. Mirmoradi, and I. Hosseinpour, "The effect of polypropylene fibers on the properties of fresh and hardened lightweight self-compacting concrete," *Constr. Build. Mater.*, vol. 25, no. 1, pp. 351–358, 2011.
- [5] ACI, "ACI 237R-07 Self-Consolidating Concrete (Self-Consolidating Concrete)," 2007.
- [6] F. Raupit, A. Saggaff, C. S. Tan, Y. L. Lee, and M. Md Tahir, "Splitting Tensile Strength of Lightweight Foamed Concrete with Polypropylene Fiber," *Int. J. Adv. Sci. Eng. Inf. Technol.*, vol. 7, no. 2, pp. 424–430, 2017.
- [7] K. Behfarnia and O. Farshadfar, "The effects of pozzolanic binders and polypropylene fibers on durability of SCC to magnesium sulfate attack," *Constr. Build. Mater.*, vol. 38, pp. 64–71, 2013.
- [8] B. Bharali, "Experimental study on self compacting concrete (SSC) using GGBS and fly ash," *Int. J. Core Eng. Manag. (IJCEM)*, ISSN, pp. 2348–9510, 2015.
- [9] F. Dehn, K. Holschemacher, and D. Weiße, "Self-compacting concrete (SCC) time development of the material properties and the bond behaviour," *Selbstverdichtendem Bet.*, pp. 115–124, 2000.
- [10] E. Güneyisi, M. Gesoglu, and E. Özbay, "Permeation properties of self-consolidating concretes with mineral admixtures," *ACI Mater. J.*, vol. 108, no. 2, p. 150, 2011.
- [11] T. Hemalatha, A. Ramaswamy, and J. M. C. Kishen, "Simplified mixture design for production of self-consolidating concrete," *ACI Mater. J.*, vol. 112, no. 2, p. 277, 2015.
- [12] K. Jignesh and S. R. Vaniya, "Effect of use of Silica Sand as Fine Material in Concrete," *Int. J. Innov. Res. Sci. Technol.*, vol. 2, no. 01, pp. 266–271, 2015.
- [13] N. Shafiq, A. A. Elhsameed, and M. F. Nuruddin, "Durability of Sugar Cane Bagasse Ash (SCBA) Concrete towards Chloride Ion Penetration," in *Applied Mechanics and Materials*, 2014, vol. 567, pp. 369–374.
- [14] S. Collepardi, L. Coppola, R. Troli, and M. Collepardi, "Mechanical properties of modified reactive powder concrete," *ACI Spec. Publ.*, vol. 173, pp. 1–22, 1997.



**KEMENTERIAN RISET, TEKNOLOGI, DAN PENDIDIKAN TINGGI
UNIT PENELITIAN DAN PENGABDIAN
PADA MASYARAKAT DAN KERJASAMA
FAKULTAS TEKNIK UNIVERSITAS SRIWIJAYA**

Jln. Raya Prabumulih KM. 32 Inderalaya (306620) Telp. (0711) 580739-580741 Fax (0711) 580062
e-mail : ftunsri@plasa.com



REGISTRASI KARYA ILMIAH

Berdasarkan data yang terdapat pada kami, maka tulisan/artikel/penelitian dengan judul:

- THE EFFECT OF WATER CEMENT RATIO ON SULFATE RESISTANCE OF SELF-COMPACTING CONCRETE WITH BAGGASSE ASH

Termuat dalam International Journal On Advanced Science Engineering Information Technology

ISSN : 2088-5334

Penulis : Dr. Ir. Hanafiah, MS

Telah teregistrasi dengan No.

NOMOR REGISTRASI											
0	3	0	1	0	1	0	4	1	8	0	1
Kode Fakultas	Kode PS/Jurusan	Kode Publikasi	Kode Penulis	Tahun Publikasi	Kode Sumber Tulisan	Sumber Dana	Nomor urut Publikasi dan Fakultas				

Inderalaya, 08 Mei 2019

Koord.
Unit PPMK FT. UNSRI



Widya Fransiska FA, S.T., MM., Ph.D
NIR 197602162001122001