

[HOME](#) / [Editorial Team](#)

## Editorial Team

### Editor-in-Chief

Prof. (Dr.) Prem Nath, Formerly, Professor of Mathematics, University of Delhi, Delhi 110007, India [ Mailing address: A - 251, Opposite Primary School, Shastri Nagar, Delhi 110052 ], India

### Editorial Board

Prof. Andrew Rosalsky, Department of Statistics. University of Florida, P.O. Box 8545, Gainesville, FL 32611-8545, United States

Prof. Antony F. Desmond, Department of Mathematics and Statistics, University of Guelph, Guelph, Ontario, Canada N1G 2K1, Canada

Prof. Donal O'Regan, Department of Mathematics, National University of Ireland, Galway, Ireland

Prof. Dumitru Motreanu, Departement de Mathematiques, Universite de Perpignan, 52, Avenue Paul Alduy, 66860 Perpignan, France

Prof. Edward L. Ionides, Department of Statistics, University of Michigan, 1085 South University Ave, Ann Arbor MI 48109-1107, United States

Prof. Ernest Fokoué, Data Science Research Group, School of Mathematical Sciences, Rochester Institute of Technology, Rochester, NY, United States

Prof. Francisco Herrera, Department of Computer Science and Artificial Intelligence, ETS de Ingenieria Informatica de Telecomunicacion, University of Granada, E-1807 Granada, Spain

Prof. I. J. Taneja, Departamento de Matematica, Universidade Federal de Santa Catarina, 88.040-900 Florianopolis, SC, Brazil

Prof. Jan Beran, Department of Mathematics and Statistics, University of Konstanz, D-78457 Konstanz, Germany

Prof. Janusz Brzdek, Department of Mathematics Pedagogical University, Krakow, Poland

Prof. John R. Graef, Department of Mathematics, University of Tennessee at Chattanooga, Chattanooga, TN 37403-2598, United States

Prof. Dr. Hari Mohan Srivastava, Professor Emeritus, Department of Mathematics and Statistics, University of Victoria, Victoria, British Columbia V8W 3R4, Canada

Prof. Leindler László, Bolyai Institute, Josef Attilia, H-6720 Szeged, Hungary

Prof. Mahmoud Mohseni Moghadam, Department of Mathematics, Shahid Bahonar University of Kerman, Kerman, Iran, Islamic Republic of

Prof. Mohsen Mohammadzadeh, Department Statistics, Tarbiat Modares University, Tehran, Iran, Islamic Republic of

Prof. Michel Deza, LIGA, Ecole Normale Supérieure 45, rue d'Ulm, 75005, Paris, France

Prof. Prasanna Sahoo, Department of Mathematics, University of Louisville, Louisville, KY 40292, United States

Prof. Piergiulio Corsini, Department of Biology & Agro-Industrial Economy, Via delle Scienze 208, 33100 Udine,, Italy

Prof. Ram U. Verma, Department of Mathematics, University of Toledo, Toledo, Ohio 43606, USA, United States

Prof. Ravi P. Agarwal, Department of Mathematics, Florida Institute of Technology, Melbourne, FL 32901, United States

Prof. Roman Ger, Institute of Mathematics, Silesian University, Katowice, Poland

Prof. Themistocles M. Rassias, Department of Mathematics, National Technical University of Athens, Zografou Campus, 15780 Athens, Greece

Prof. Sehie Park, Department of Mathematics, Seoul National University, Seoul, Korea, Republic of

Prof. Sever S. Dragomir, School of Engineering & Science Victoria University, P.O. Box 14428 Melbourne City, MC8001, Australia

Prof. Seyed Mohammad Hosseini, Department of Mathematics, Tarbiat Modares University, Tehran, Iran, Islamic Republic of

Prof. Yanqin Bai, Department of Mathematics, College of Science, Shanghai University, Shanghai, 200436, China

**Associate Editor(s)**

Dr. Vishnu Narayan Mishra, Indira Gandhi National Tribal University, Lalpur, Amarkantak, Anuppur, Madhya Pradesh 484 887, India

[MAKE A SUBMISSION](#) Flag Counter**MOST READ ARTICLES**

---

Application of Laplace transforms to solve ODE using MATLAB

👁 389

Design and Construction of a Pure Sine Wave Inverter

👁 330

A Note on  $\Gamma$ -Gamma Function and Pochhammer  $k$ -Symbol

👁 248

Construction of An Automatic Power Switch using Infrared Motion Sensor

👁 205

Graduate Employability and Entrepreneurship in Records Management: Unexplored Potential Business in Commercial Records Center

👁 191

---

**Journal of Informatics and Mathematical Sciences** (eISSN 0975-5748; pISSN 0974-875X)

Published by the RGN Publications

[Contact](#) | [Privacy Statement](#)



HOME / Author Guidelines

## Author Guidelines

As part of the submission process, authors are required to check the following items:

1. The full length article to be submitted for possible publication in JIMS has neither been published nor submitted for possible publication elsewhere.
2. The first page of the manuscript should contain:
  - The title of the research paper.
  - Name(s) of the author(s) together with the academic affiliation(s), e-mail address(es) and ORCID id(s).
  - An abstract not exceeding 250 words. By nature, Abstracts shall not contain numbered mathematical equations nor numbered references. Numbered reference citations are not allowed.
  - Keywords and phrases.
  - 2020 AMS Subject Classifications.
  - Article type: Research article or Survey article or Book Review or Case Study or Thesis Abstract or Bibliographic work
3. The text is single-spaced; uses a 12-point font; employs italics, rather than underlining (except with URL addresses); and all illustrations, figures, and tables are placed within the text at the appropriate places, rather than at the end.
4. References should be given at the end of the manuscript. These references should be listed in alphabetic order; the surname(s) of the author(s) appearing at the end and cited in the whole text as e.g. [1], [2], etc.
5. If the Reference entry includes a DOI for the article, use the DOI number at the end. If there is no DOI, include the URL of the published article.
6. All references listed in "References" must have complete publication details and must be cited in the text portion of the article.
7. For a better way to format your submission, you may download the template file in MS-Word or in LaTeX format. **Template files & Cover Letter:** [MS-Word](#) [LaTeX](#)
8. Mandatory files to be submitted/uploaded:
  - File 1: Full article in pdf format
  - File 2: Cover letter (as supplementary file)
9. The manuscript must be submitted electronically in PDF format alongwith Covering Letter to the Editor-in-Chief: Prof. (Dr.) Prem Nath [prof.premnath.jims@gmail.com](mailto:prof.premnath.jims@gmail.com)
10. Alternatively, author(s) may submit their article(s) via [Online Submission](#)
11. **Upon Acceptance:** Once an article is accepted, Publisher will require digital file of the article either in MS-Word or in LaTeX format alongwith associated figure files.
12. **Manuscript Processing Charges** will be billed to the submitting author upon acceptance of the article for publication as follows:
  - **Foreign Authors:** US\$130 per article (inclusive of all taxes).
  - **Indian Authors:** INR 7080 per article (inclusive of all taxes).

**Note.** RGN Journal Management System is fully compatible with all dialects of  $\text{\LaTeX}$  and MathML

MAKE A SUBMISSION



 Flag Counter

## MOST READ ARTICLES

---

Application of Laplace transforms to solve ODE using MATLAB

👁 389

Design and Construction of a Pure Sine Wave Inverter

👁 330

A Note on  $\Gamma$ -Gamma Function and Pochhammer  $\Gamma$ -Symbol

👁 248

Construction of An Automatic Power Switch using Infrared Motion Sensor

👁 205

Graduate Employability and Entrepreneurship in Records Management: Unexplored Potential Business in Commercial Records Center

👁 191

---

**Journal of Informatics and Mathematical Sciences** (eISSN 0975-5748; pISSN 0974-875X)

Published by the RGN Publications

[Contact](#) | [Privacy Statement](#)

[HOME](#) / [Indexing](#)

## Indexing

The **Journal of Informatics and Mathematical Sciences** is Indexed/ Abstracted/ Reviewed/ Cataloged in

- **EBSCO Host<sup>(R)</sup>**, USA
- **SCINAPSE**
- **AMS Digital Mathematics Registry(R)**, USA
- **Polish Ministry of Science and Higher Education** (Polish scientists who publish articles in the **Journal of Informatics and Mathematical Sciences** will receive 20 points for their scientific achievements which are necessary for the evaluation of scientists and universities in Poland.)
- **Index Copernicus: ICV(2019) = 84.52**
- **Google Scholar<sup>(R)</sup>**, USA, **h-index: 9, g-index: 17**
- **CrossRef**, USA
- **Gulf University**, Kingdom of Bahrain
- **Georgetown University Libraries Catalog**, USA
- **University of Illinois at Urbana-Champaign**, USA

<sup>(R)</sup> Trademarks of their respective owners.

[MAKE A SUBMISSION](#)





 Flag Counter

## **MOST READ ARTICLES**

---

Application of Laplace transforms to solve ODE using MATLAB

 389

Design and Construction of a Pure Sine Wave Inverter

 330

A Note on  $\psi$ -Gamma Function and Pochhammer  $\psi$ -Symbol

 248

Construction of An Automatic Power Switch using Infrared Motion Sensor

 205

Graduate Employability and Entrepreneurship in Records Management: Unexplored Potential Business in Commercial Records Center

**Journal of Informatics and Mathematical Sciences** (eISSN 0975-5748; pISSN 0974-875X)

Published by the RGN Publications

[Contact](#) | [Privacy Statement](#)





HOME / ARCHIVES / VOL. 9 NO. 4 (2017) / Research Articles

# The Application to Find Cutting Patterns in Two Dimensional Cutting Stock Problem

**Sisca Octarina**

Department of Mathematics, Faculty of Mathematics and Natural Sciences, Sriwijaya University, Indralaya

**Putra B.J. Bangun**

Department of Mathematics, Faculty of Mathematics and Natural Sciences, Sriwijaya University, Indralaya

**Samuel Hutapea**

Department of Mathematics, Faculty of Mathematics and Natural Sciences, Sriwijaya University, Indralaya


**DOI:** <https://doi.org/10.26713/jims.v9i4.1024>

**Keywords:** Cutting Stock Problem, Trim Loss, Modified Branch and Bound Algorithm

## ABSTRACT

Two dimensional Cutting Stock Problem (CSP) is a problem to find the appropriate patterns that fulfilled the demand with different length and cut from two sides, the length and width. Two dimensional CSP aims to minimize the cutting waste that called Trim Loss. This research designed and made the application of finding cutting patterns in two dimensional CSP. Based on the results, it found that Modified Branch and Bound Algorithm makes the pattern searching become easier than manual searching. This application also yields the optimal patterns with minimum Trim Loss.

## DOWNLOADS

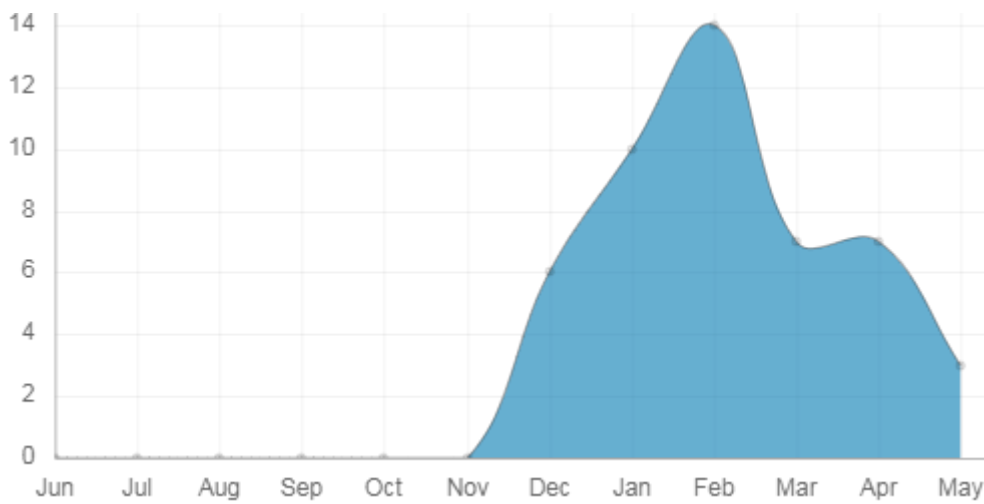

 PDF  47

PUBLISHED

2017-12-30

CITATION



HOW TO CITE

Octarina, S., Bangun, P. B., & Hutapea, S. (2017). The Application to Find Cutting Patterns in Two Dimensional Cutting Stock Problem. *Journal of Informatics and Mathematical Sciences*, 9(4), 1269–1276. <https://doi.org/10.26713/jims.v9i4.1024>

More Citation Formats 

ISSUE

[Vol. 9 No. 4 \(2017\).](#)

SECTION

## Research Articles

### LICENSE

Authors who publish with this journal agree to the following terms:

- Authors retain copyright and grant the journal right of first publication with the work simultaneously licensed under a CCAL that allows others to share the work with an acknowledgement of the work's authorship and initial publication in this journal.
- Authors are able to enter into separate, additional contractual arrangements for the non-exclusive distribution of the journal's published version of the work (e.g., post it to an institutional repository or publish it in a book), with an acknowledgement of its initial publication in this journal.
- Authors are permitted and encouraged to post their work online (e.g., in institutional repositories or on their website) prior to and during the submission process, as it can lead to productive exchanges, as well as earlier and greater citation of published work.

**MAKE A SUBMISSION**



 Flag Counter

## MOST READ ARTICLES

---

Application of Laplace transforms to solve ODE using MATLAB

 389

Design and Construction of a Pure Sine Wave Inverter

 330

A Note on  $\psi$ -Gamma Function and Pochhammer  $\psi$ -Symbol

 248

Construction of An Automatic Power Switch using Infrared Motion Sensor

 205

Graduate Employability and Entrepreneurship in Records Management: Unexplored Potential Business in Commercial Records Center

**Journal of Informatics and Mathematical Sciences** (eISSN 0975-5748; pISSN 0974-875X)

Published by the RGN Publications

[Contact](#) | [Privacy Statement](#)





# The Application to Find Cutting Patterns in Two Dimensional Cutting Stock Problem

Sisca Octarina\*, Putra B. J. Bangun and Samuel Hutapea

*Department of Mathematics, Faculty of Mathematics and Natural Sciences, Sriwijaya University, Indralaya, Indonesia*

\*Corresponding author: [s.octarina@gmail.com](mailto:s.octarina@gmail.com)

**Abstract.** Two dimensional Cutting Stock Problem (CSP) is a problem to find the appropriate patterns that fulfilled the demand with different length and cut from two sides, the length and width. Two dimensional CSP aims to minimize the cutting waste that called Trim Loss. This research designed and made the application of finding cutting patterns in two dimensional CSP. Based on the results, it found that Modified Branch and Bound Algorithm makes the pattern searching become easier than manual searching. This application also yields the optimal patterns with minimum Trim Loss.

**Keywords.** Cutting Stock Problem; Trim Loss; Modified Branch and Bound Algorithm

**MSC.** 31-XX

**Received:** August 9, 2016

**Accepted:** January 12, 2017

Copyright © 2017 Sisca Octarina, Putra B. J. Bangun and Samuel Hutapea. *This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.*

## 1. Introduction

Raw material is one of the most important ingredients in the production process. Many types of raw materials are used in the paper industry. Paper materials should be cut into some pieces before being used. Cutting problems in Optimization better known as the Cutting Stock Problem (CSP). CSP on paper cuts often result in residual cuts which can not be used so-called trim loss. Trim loss is the part that should be minimized because it will minimize the profits [2].

CSP is divided into three sections based on the trim loss. There are one-dimensional, two-dimensional and three dimensional CSP. Many researches on CSP have been done.



[3] did optimization CSP with Integer Linear Programming (ILP) methods. This method produces minimum trim loss with solutions offered in different conditions.

Research on two-dimensional CSP also has a lot to do. Two-dimensional CSP always regards to the width and the length of cutting. All researches on the CSP either one-dimensional or two-dimensional still use manual patterns searching. The weakness of this pattern searching has its own difficulties, takes a long time and still missed some of the possible cutting patterns. [4] and [6] have minimized trim loss in one-dimensional CSP without using pattern searching method. So it could not found all patterns and influenced the model. [5] have developed Modified Branch and Bound Algorithm to find two-dimensional paper-cutting patterns in large amounts. But the algorithm is still used manually, so it takes a long time and high accuracy to complete.

Based on this background, this study made the application to find cutting patterns in two-dimensional CSP. Research was conducted on paper cutting with the data derived from the CV PRODA. CV PRODA is one of the printing in Palembang since 1997.

## 2. Methodology

This research method is a case study at CV Proda. The procedures are carried out as follows.

- a. Describing the secondary data including the product name, size and product demand in June, 2015.
- b. Ordering products based on order size.
- c. Defining the required variables.
- d. Creating Modified Branch and Bound Algorithm to find the cutting patterns in the 2-dimensional CSP.
- e. Creating an application using Modified Branch and Bound Algorithm in Javascript language.
- f. Testing the application into the 2-dimensional CSP.
- g. Finding the cutting patterns using the application.
- h. Forming the ILP models which consists of the objective function and constraint functions.
- i. Solving the model of ILP.
- j. Interpreting and analyzing the solution.
- k. Making conclusions from the results and discussion.

## 3. Modified Branch and Bound Algorithm

Let the number of main sheets being cut according to the  $j^{\text{th}}$  pattern is denoted by  $x_j$  and the cutting loss for each number of each  $j^{\text{th}}$  pattern is denoted by  $c_j$ . The demand for the  $i^{\text{th}}$  item is

denoted by  $d_i$ , so the number of occurrences of the  $i^{\text{th}}$  item in the  $j^{\text{th}}$  pattern is denoted by  $p_{ij}$ , with  $m$  is the number of items and  $n$  is the number of patterns.

The 2-dimensional CSP model is:

$$\text{Minimize } Z = \sum_{j=1}^n c_j x_j$$

Subject to

$$\sum_{j=1}^n p_{ij} x_j \geq d_i, \quad \text{for all } i = 1, 2, \dots, m \quad (1)$$

$$x_j, p_{ij} \geq 0 \text{ and integer for all } x_j, p_{ij}$$

In this case, the main sheet is viewed in two dimensions, consider the size of length and width. The length and width of main sheets are denoted by  $L$  and  $W$ , respectively. Furthermore  $l_i$  and  $w_i$  are the length and width of each  $i^{\text{th}}$  product respectively.

The algorithm of *Modified Branch and Bound Algorithm* which was proposed by [5] is as follows:

1. a. Arrange required lengths  $l_i, i = 1, 2, \dots, m$  in decreasing order,  $l_1 > l_2 > \dots l_m$  where  $m$  is number of items.  
b. Arrange required widths  $w_i, i = 1, 2, \dots, m$  according to the corresponding length  $l_i, i = 1, 2, \dots, m$ .

2. For  $i = 1, 2, \dots, m$  and  $j = 1$  do steps 3 to 5.

3. Set

$$a_{11} = \left\lfloor \left\lfloor \frac{L}{l_1} \right\rfloor \right\rfloor \quad \text{and} \quad a_{ij} = \left\lfloor \left\lfloor \frac{(L - \sum_{z=1}^{i-1} a_{zj} l_z)}{l_i} \right\rfloor \right\rfloor, \quad (2)$$

where  $L$  is the length of main sheets.

4. If  $a_{ij} > 0$  then set

$$b_{ij} = \lfloor W/w_i \rfloor \quad (3)$$

Else set  $b_{ij} = 0$ , where  $W$  is the width of the main sheet.

5. Set

$$p_{ij} = a_{ij} b_{ij} \quad (4)$$

6. *Cutting loss*

(i) Cut loss along the length of the main sheet:

$$c_u = \left( L - \sum_{i=1}^m a_{ij} l_i \right) \times W \quad (5)$$

For  $i = 1, 2, \dots, m$ .

If  $(L - \sum_{i=1}^m a_{ij} l_i) \geq w_i$  and  $W \geq l_i$ , considering  $90^\circ$  rotation.

Set

$$A_{ij} = \left\lfloor \left\lfloor \frac{(L - \sum_{i=1}^m a_{ij}l_i)}{w_i} \right\rfloor \right\rfloor \quad (6)$$

$$B_{ij} = \begin{cases} \lfloor W/l_i \rfloor \\ 0, \text{ otherwise} \end{cases}, \text{ if } A_{ij} > 0 \quad (7)$$

$$p_{ij} = p_{ij} + A_{ij}B_{ij} \quad (8)$$

Else set

$$\left. \begin{aligned} A_{ij} &= 0 \\ B_{ij} &= 0 \\ P_{ij} &= P_{ij} \end{aligned} \right\} \quad (9)$$

If  $A_{ij} > 0$ , then set

$$C_u = \left[ \left( L - \sum_{i=1}^m a_{ij}l_i \right) - A_{ij}W_i \right] \times B_{ij}l_i \quad (10)$$

$$C_v = \left[ \left( L - \sum_{i=1}^m a_{ij}l_i \right) \right] \times (W - B_{ij}l_i) \quad (11)$$

else

$$C_u = \left( L - \sum_{i=1}^m a_{ij}l_i \right) \times W \quad (12)$$

(ii) Cut loss along the width of the main sheet:

$$C_v = (a_{ij}l_i) \times k_{ij} \quad (13)$$

$$k_{ij} = W - (b_{ij}w_i). \quad (14)$$

If  $(b_{ij}w_i) = 0$  then set  $k_{ij} = 0$ , where  $k_{ij}$  is the remaining width of each item in each pattern.

For  $z \neq i$ , if  $(a_{ij}l_i) \geq l_z$  and  $k_{ij} \geq w_z$  then set

$$A_{zj} = \left\lfloor \left\lfloor \frac{a_{ij}l_i}{l_z} \right\rfloor \right\rfloor \quad (15)$$

$$B_{zj} = \begin{cases} \lfloor W/l_i \rfloor \\ 0, \text{ otherwise} \end{cases}, \text{ if } A_{zj} > 0 \quad (16)$$

$$p_{zj} = p_{zj} + A_{zj}B_{zj} \quad (17)$$

Else set

$$\left. \begin{aligned} A_{ij} &= 0 \\ B_{ij} &= 0 \\ P_{ij} &= P_{ij} \end{aligned} \right\} \quad (18)$$

If  $A_{zj} > 0$ , then set

$$C_u = [a_{ij}l_i - A_{zj}l_z] \times B_{zj}w_{zi}; \quad (19)$$

$$C_v = a_{ij}l_i \times (k_{ij} - B_{zj}l_z) \quad (20)$$

Else

$$C_v = (a_{ij}l_i) \times k_{ij} \quad (21)$$

7. Set  $r = m - 1$ , while  $r > 0$  do step 8

8. While  $a_{rj} > 0$ , set  $j = j + 1$  and do step 9

9. If  $a_{rj} \geq b_{rj}$ , then generate a new pattern according to the following conditions :

For  $z = 1, 2, \dots, r - 1$ , set

$$a_{zj} = a_{zj-1} \quad \text{and} \quad b_{zj} = b_{zj-1} \quad (22)$$

For  $z = r$ , set

$$a_{zj} = a_{zj-1} - 1 \quad (23)$$

If  $a_{zj} > 0$  then set

$$b_{zj} = \lfloor W/w_z \rfloor \quad (24)$$

Else set

$$b_{zj} = 0 \quad (25)$$

For  $z = r + 1, \dots, m$ , calculate  $a_{zj}$  and  $b_{zj}$  using Equations (2) and (3), and go to step 5

Else generate a new pattern according to the following conditions: For  $z = 1, 2, \dots, r - 1$ , set

$$a_{zj} = a_{zj-1} \quad \text{and} \quad b_{zj} = b_{zj-1} \quad (26)$$

For  $z = r$ , set

$$a_{zj} = a_{zj-1} - 1 \quad \text{and} \quad b_{zj} = b_{zj-1} - 1 \quad (27)$$

For  $z = r + 1, \dots, m$ , calculate  $a_{zj}$  and  $b_{zj}$  using Equations (2) and (3), go to step 5

10. Set  $r = r - 1$

11. STOP

This application uses Javascript and the initial view can be seen in Figure 1. Furthermore, this application was used to find the cutting patterns in 2-dimensional CSP at CV PRODA. The size of the main sheet is 1090 mm × 970 mm. Each kind of the product and the number of order in each month can be seen in Table 1.

**Table 1.** Kinds of product and the number of orders

No.	Product name	Length (mm)	Width (mm)	Number of order (pieces)
1	Invitation card	325	225	300
2	Name card	90	60	1000
3	Brochure	210	150	3000
4	Book cover	230	160	500


Based on the data from Table 1 and from the application, there were 30.644 cutting patterns. We chose 24 cutting patterns with minimum trim loss that can be seen in Table 2. The model of 2-dimensional CSP of this case is as follows:

$$\text{Minimize } Z = \sum_{j=1}^{24} c_j x_j \quad (28)$$

$$\text{Subject to } \sum_{j=1}^{24} p_{ij} x_j \geq d_i, \quad \text{for all } i = 1, 2, 3, 4$$

$$x_j \geq 0 \text{ and integer} \quad (29)$$

By solving the model in Equations (28), it found that  $Z = 31.650$ ,  $x_1, x_3, x_4, x_5, x_6, x_7, x_8, x_9, x_{10}, x_{11}, x_{12}, x_{13}, x_{14}, x_{15}, x_{16}, x_{18}, x_{19}, x_{20}, x_{21}, x_{22}, x_{23}, x_{24} = 0$ ,  $x_2 = 1$  and  $x_{17} = 1$ . It means that the optimum cutting patterns are the 2<sup>nd</sup> and the 17<sup>th</sup>. From Table 2, the 2<sup>nd</sup> pattern yields 4 pieces invitation cards, 4 pieces book covers and 33 pieces name cards whereas the 17<sup>th</sup> pattern only yields 31 pieces of brochure.

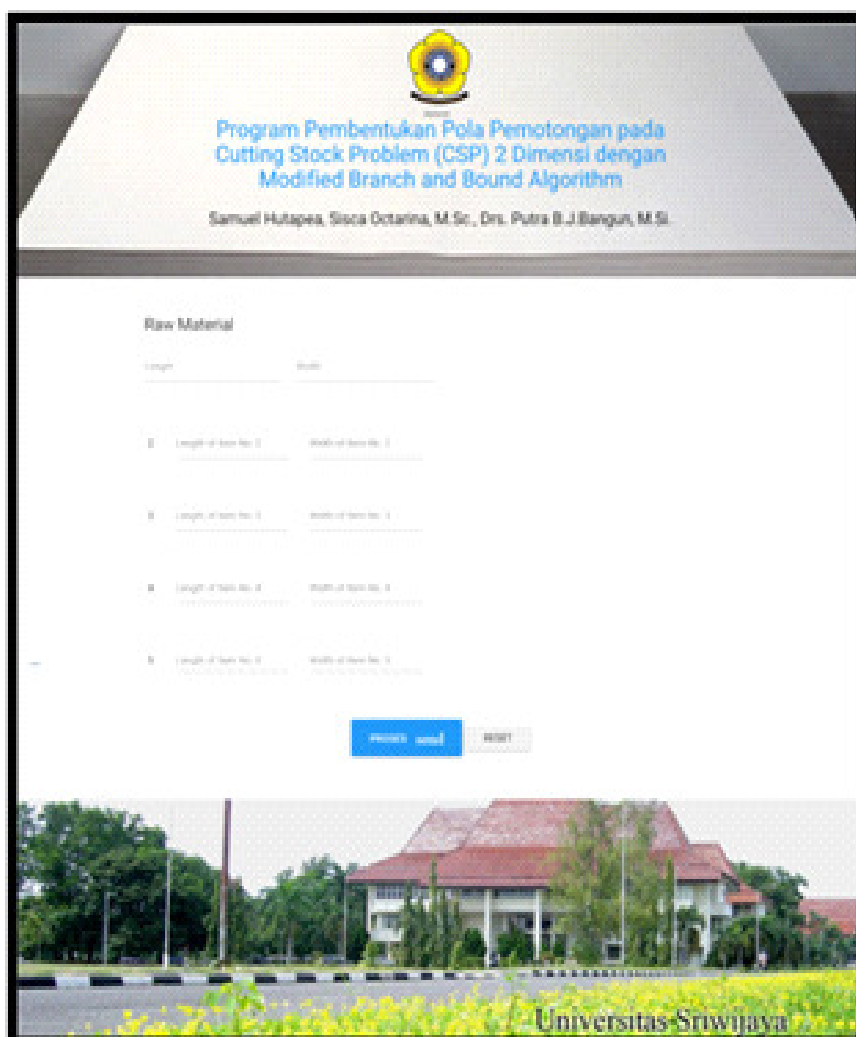

**Figure 1.** The application to find cutting patterns

**Table 2.** Cutting patterns with minimum trim loss

The $j^{th}$ pattern	Number of Items				Trim Loss(mm <sup>2</sup> )
	325×225	230×160	210×150	90×60	
1	12	0	0	26	72.750
2	4	4	0	33	13.250
3	6	1	5	17	25.750
4	3	11	5	8	36.325
5	2	15	0	8	61.350
6	2	8	8	10	57.550
7	8	0	0	0	472.300
8	0	0	0	180	75.600
9	2	8	8	2	45.600
10	2	6	1	50	32.650
11	4	3	5	15	136.800
12	0	28	0	0	18.400
13	1	10	10	13	60.800
14	3	5	5	10	136.000
15	1	4	1	40	47.850
16	1	8	1	64	41.950
17	0	0	31	0	18.400
18	3	4	1	48	152.000
19	2	12	3	18	12.450
20	2	12	5	16	86.550
21	0	3	4	112	121.700
22	8	0	0	5	385.000
23	0	4	3	112	8.000
24	4	3	5	20	165.600

## 4. Conclusions

Based on the results, it can be concluded that this application can make the cutting pattern searching become easier, especially for the complex problems.

## Competing Interests

The authors declare that they have no competing interests.

## Authors' Contributions

All the authors contributed significantly in writing this article. The authors read and approved the final manuscript.

## References

- [1] D. S. Chen, R. G. Batson and Y. Dang, *Applied Integer Programming Modeling and Solution*, John Wiley & Sons, New Jersey (2010).

- [2] R. W. Haessler and P. E. Sweeney, Cutting stock problems and solution procedures, *European Journal of Operational Research* **54** (1991), 141 – 150.
- [3] D. Nurkertamanda, S. Saptadi and A. Permanasari, Cutting stock optimization in paper cutting industry using integer linear programming method, *Journal of Industrial Engineering Universitas Diponegoro* **2**(1) (2007).
- [4] S. Octarina, D. Setiadi and P. B. J. Bangun, Trim loss optimization in cutting stock problem using column generation technique and modified balas algorithm, *Proceeding Annual Research Seminar Computer Science and ICT, Fakultas Ilmu Komputer, Universitas Sriwijaya* (2015).
- [5] W. N. P. Rodrigo, W. B. Daundasekera and A. A. I. Perera, Pattern generation for two dimensional cutting stock problem with location, *International Journal of Mathematics Trends and Technology* **3**(2) (2012), 54 – 62.
- [6] M. M. Sepriyansyah, S. Octarina and E. S. Cahyono, Solving the trim loss in cutting stock problem using integer linear programming (ILP), *Proceeding of SEMIRATA BKS PTN Barat, Universitas Sriwijaya*, (2016).